



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3750 M4  
(Intel Xeon E5-4620 v2, 2.60 GHz)

SPECfp®\_rate2006 = 1010

SPECfp\_rate\_base2006 = 986

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Aug-2014

Hardware Availability: Jun-2014

Software Availability: Nov-2013

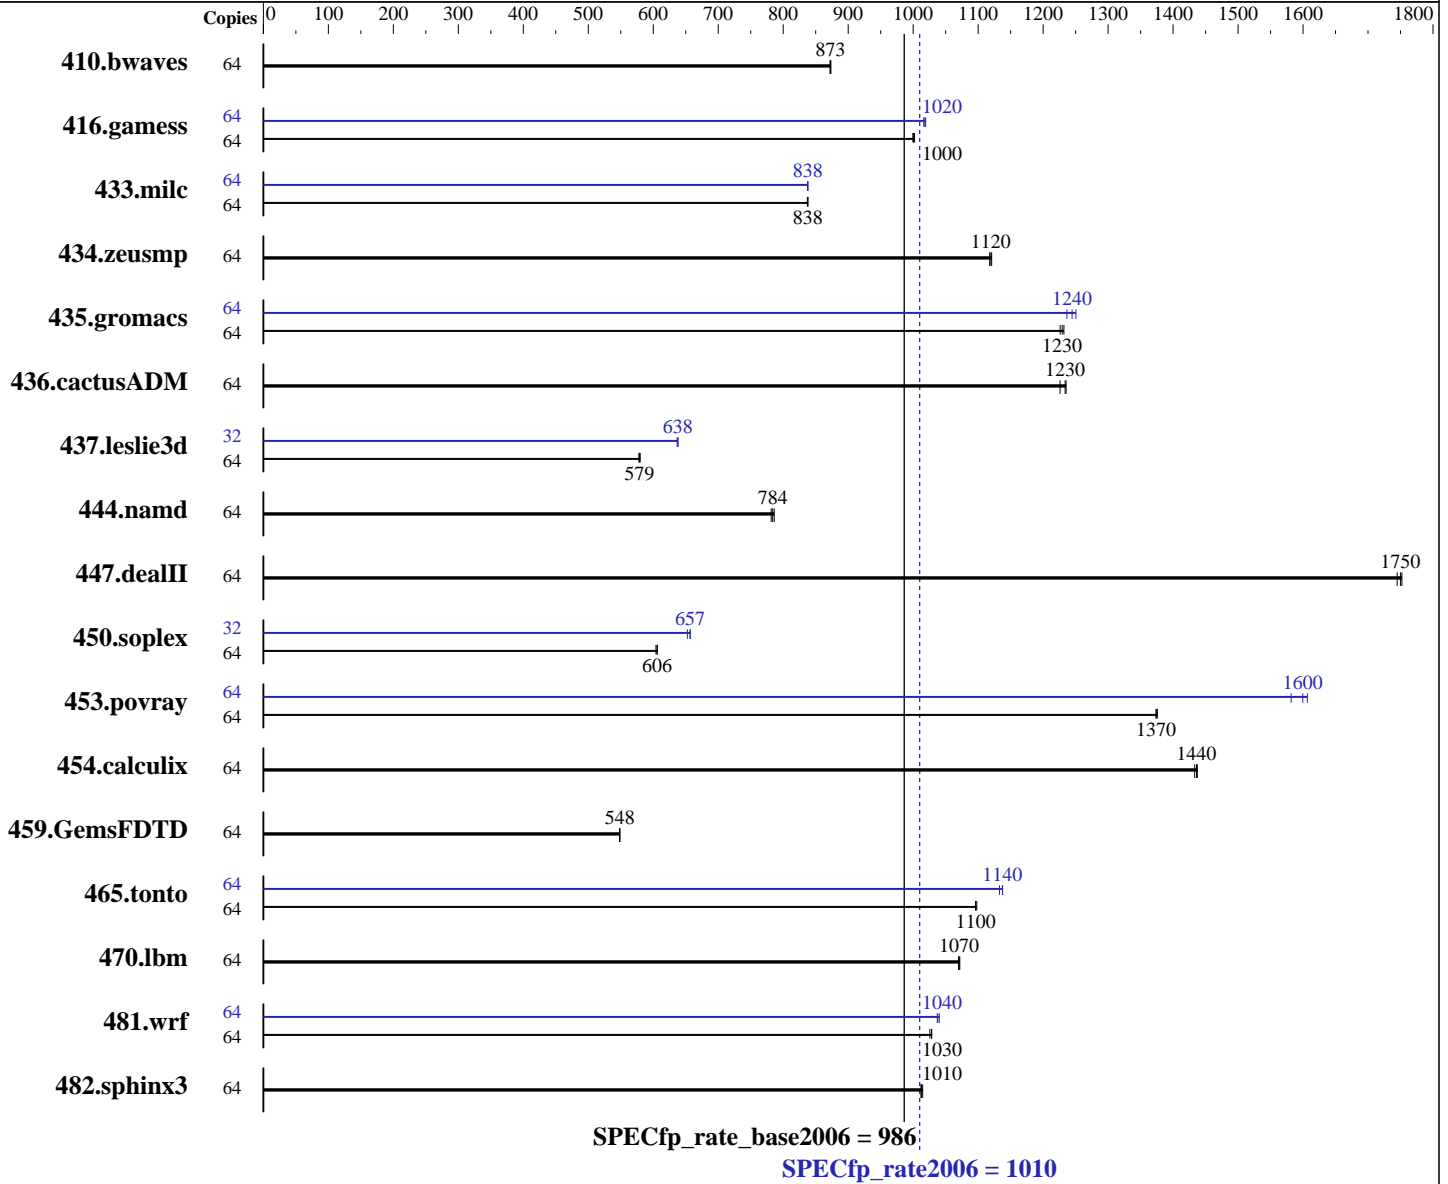

### Hardware

CPU Name: Intel Xeon E5-4620 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.00 GHz  
 CPU MHz: 2200  
 FPU: Integrated  
 CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 4 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
 2.6.32-431.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3750 M4  
(Intel Xeon E5-4620 v2, 2.60 GHz)

SPECfp\_rate2006 = 1010

SPECfp\_rate\_base2006 = 986

CPU2006 license: 11  
Test sponsor: IBM Corporation  
Tested by: IBM Corporation

Test date: Aug-2014  
Hardware Availability: Jun-2014  
Software Availability: Nov-2013

L3 Cache: 20 MB I+D on chip per chip  
Other Cache: None  
Memory: 512 GB (32 x 16 GB 2Rx4 PC3-14900R-13, ECC, running at 1600 MHz)  
Disk Subsystem: 1 x 300 GB SAS, 10000 RPM  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	64	996	873	<b>997</b>	<b>873</b>	997	872	64	996	873	<b>997</b>	<b>873</b>	997	872		
416.gamess	64	<b>1252</b>	<b>1000</b>	1251	1000	1254	1000	64	1230	1020	1233	1020	<b>1231</b>	<b>1020</b>		
433.milc	64	701	838	702	837	<b>701</b>	<b>838</b>	64	701	838	<b>701</b>	<b>838</b>	702	837		
434.zeusmp	64	<b>520</b>	<b>1120</b>	521	1120	520	1120	64	<b>520</b>	<b>1120</b>	521	1120	520	1120		
435.gromacs	64	373	1230	371	1230	<b>372</b>	<b>1230</b>	64	370	1240	<b>367</b>	<b>1240</b>	365	1250		
436.cactusADM	64	624	1230	619	1240	<b>620</b>	<b>1230</b>	64	624	1230	619	1240	<b>620</b>	<b>1230</b>		
437.leslie3d	64	1037	580	<b>1039</b>	<b>579</b>	1041	578	32	472	637	<b>472</b>	<b>638</b>	471	638		
444.namd	64	653	786	<b>655</b>	<b>784</b>	657	782	64	653	786	<b>655</b>	<b>784</b>	657	782		
447.dealII	64	418	1750	420	1740	<b>418</b>	<b>1750</b>	64	418	1750	420	1740	<b>418</b>	<b>1750</b>		
450.soplex	64	883	604	880	606	<b>881</b>	<b>606</b>	32	406	657	409	653	<b>406</b>	<b>657</b>		
453.povray	64	248	1370	<b>248</b>	<b>1370</b>	247	1380	64	<b>213</b>	<b>1600</b>	215	1580	212	1610		
454.calculix	64	368	1430	<b>368</b>	<b>1440</b>	367	1440	64	368	1430	<b>368</b>	<b>1440</b>	367	1440		
459.GemsFDTD	64	1239	548	<b>1238</b>	<b>548</b>	1238	549	64	1239	548	<b>1238</b>	<b>548</b>	1238	549		
465.tonto	64	575	1100	<b>574</b>	<b>1100</b>	574	1100	64	554	1140	<b>554</b>	<b>1140</b>	556	1130		
470.lbm	64	820	1070	<b>821</b>	<b>1070</b>	822	1070	64	820	1070	<b>821</b>	<b>1070</b>	822	1070		
481.wrf	64	<b>695</b>	<b>1030</b>	695	1030	697	1030	64	687	1040	689	1040	<b>689</b>	<b>1040</b>		
482.sphinx3	64	<b>1232</b>	<b>1010</b>	1229	1010	1233	1010	64	<b>1232</b>	<b>1010</b>	1229	1010	1233	1010		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3750 M4  
(Intel Xeon E5-4620 v2, 2.60 GHz)

SPECfp\_rate2006 = 1010

SPECfp\_rate\_base2006 = 986

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** Aug-2014  
**Hardware Availability:** Jun-2014  
**Software Availability:** Nov-2013

### Platform Notes

Operating Mode set to Maximum Performance in BIOS  
Sysinfo program /cpu2006.1.2\_14.0\_aug2013/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
running on Larry-KongIVB Sat Aug 9 03:26:22 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-4620 v2 @ 2.60GHz
 4 "physical id"s (chips)
 64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 8
siblings : 16
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
physical 2: cores 0 1 2 3 4 5 6 7
physical 3: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal: 529085024 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.5 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux Larry-KongIVB 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Aug 8 15:13
```

```
SPEC is set to: /cpu2006.1.2_14.0_aug2013
Filesystem Type Size Used Avail Use% Mounted on
/dev/mapper/vg_larrykongivb-lv_root ext4 264G 100G 151G 40% /
```

```
Additional information from dmidecode:
BIOS IBM -[KOE141AUS-1.50]- 05/03/2014
Memory:
31x Micron 36JSF2G72PZ-1G9E1 16 GB 1600 MHz 2 rank
16x Not Specified Not Specified
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM System x3750 M4  
(Intel Xeon E5-4620 v2, 2.60 GHz)

**SPECfp\_rate2006 = 1010**

**SPECfp\_rate\_base2006 = 986**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** Aug-2014  
**Hardware Availability:** Jun-2014  
**Software Availability:** Nov-2013

## Platform Notes (Continued)

1x Samsung M393B2G70QH0-CMA 16 GB 1600 MHz 2 rank

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/cpu2006.1.2_14.0_aug2013/libs/32:/cpu2006.1.2_14.0_aug2013/libs/64:/cpu2006.1.2_14.0_aug2013/sh"
```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM System x3750 M4  
(Intel Xeon E5-4620 v2, 2.60 GHz)

**SPECfp\_rate2006 = 1010**

**SPECfp\_rate\_base2006 = 986**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** Aug-2014  
**Hardware Availability:** Jun-2014  
**Software Availability:** Nov-2013

## Base Portability Flags (Continued)

459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

**C benchmarks:**  
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3

**C++ benchmarks:**  
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3

**Fortran benchmarks:**  
-xAVX -ipo -O3 -no-prec-div -opt-prefetch

**Benchmarks using both Fortran and C:**  
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3

## Peak Compiler Invocation

**C benchmarks:**  
icc -m64

**C++ benchmarks (except as noted below):**  
icpc -m64  
  
450.soplex: icpc -m32

**Fortran benchmarks:**  
ifort -m64

**Benchmarks using both Fortran and C:**  
icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM System x3750 M4  
(Intel Xeon E5-4620 v2, 2.60 GHz)

**SPECfp\_rate2006 = 1010**

**SPECfp\_rate\_base2006 = 986**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Aug-2014

**Hardware Availability:** Jun-2014

**Software Availability:** Nov-2013

## Peak Portability Flags (Continued)

```

433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Peak Optimization Flags

C benchmarks:

```

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -auto-ilp32

```

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: basepeak = yes

447.dealII: basepeak = yes

```

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-malloc-options=3

```

```

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll4 -ansi-alias

```

Fortran benchmarks:

410.bwaves: basepeak = yes

```

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM System x3750 M4  
(Intel Xeon E5-4620 v2, 2.60 GHz)

**SPECfp\_rate2006 = 1010**

**SPECfp\_rate\_base2006 = 986**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** Aug-2014  
**Hardware Availability:** Jun-2014  
**Software Availability:** Nov-2013

## Peak Optimization Flags (Continued)

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Aug 26 18:11:47 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 26 August 2014.