



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM Flex System x480 X6
(Intel Xeon E7-4830 v2, 2.20 GHz)

SPECint_rate2006 = 1300

SPECint_rate_base2006 = 1260

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Aug-2014

Hardware Availability: Jun-2014

Software Availability: Nov-2013

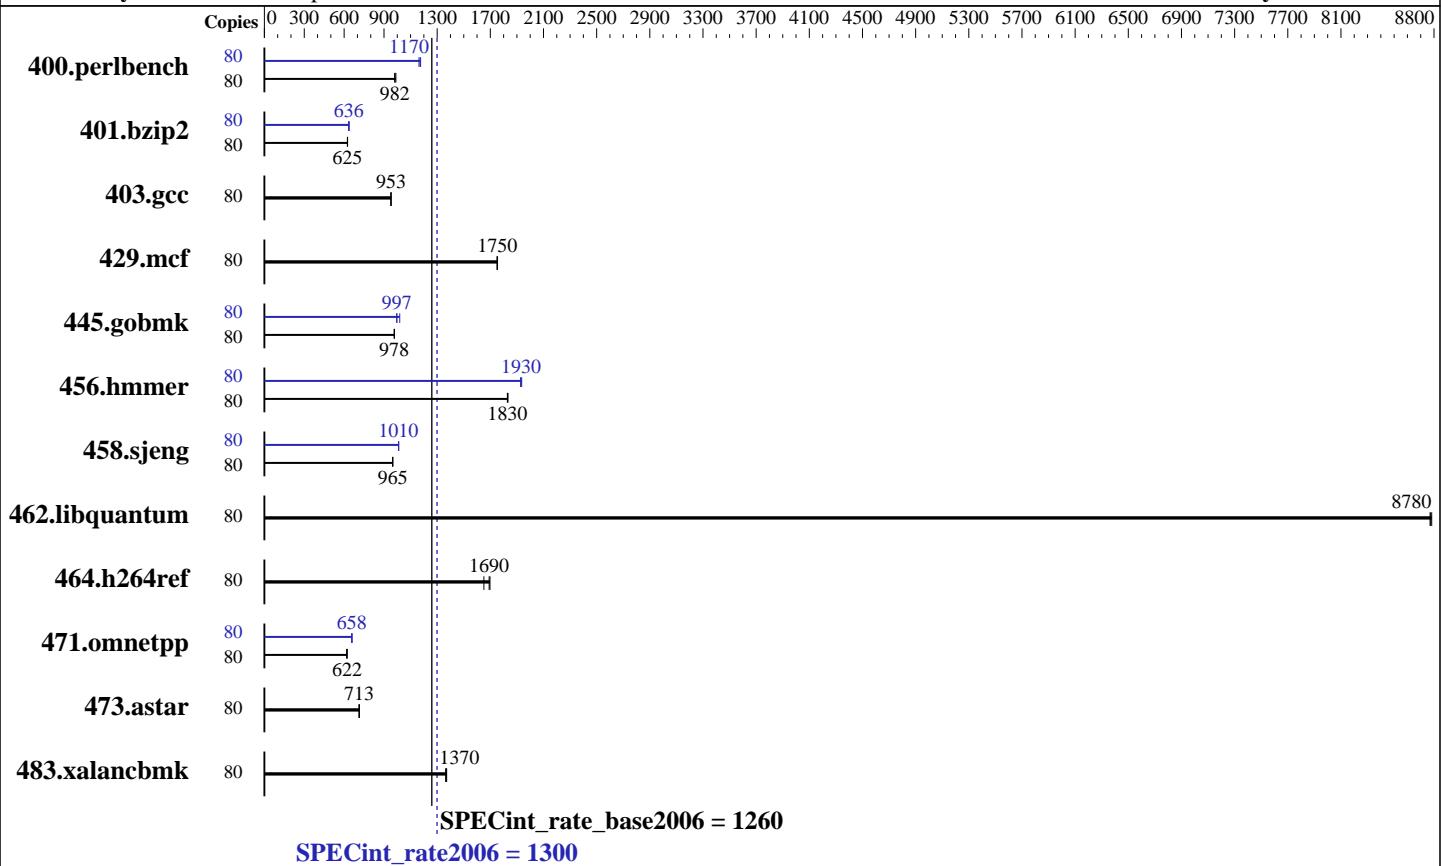

Hardware		Software
CPU Name:	Intel Xeon E7-4830 v2	Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)
CPU Characteristics:	Intel Turbo Boost Technology up to 2.70 GHz	Compiler: 2.6.32-431.el6.x86_64
CPU MHz:	2200	Auto Parallel: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
FPU:	Integrated	File System: ext4
CPU(s) enabled:	40 cores, 4 chips, 10 cores/chip, 2 threads/core	System State: Run level 3 (multi-user)
CPU(s) orderable:	2,4 chips	Base Pointers: 32-bit
Primary Cache:	32 KB I + 32 KB D on chip per core	Peak Pointers: 32/64-bit
Secondary Cache:	256 KB I+D on chip per core	Other Software: Microquill SmartHeap V10.0
L3 Cache:	20 MB I+D on chip per chip	
Other Cache:	None	
Memory:	1 TB (64 x 16 GB 2Rx4 PC3L-12800R-11, ECC, running at 1066 MHz)	
Disk Subsystem:	1 x 300 GB SAS, 10000 RPM	
Other Hardware:	None	



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM Flex System x480 X6
(Intel Xeon E7-4830 v2, 2.20 GHz)

SPECint_rate2006 = 1300

SPECint_rate_base2006 = 1260

CPU2006 license: 11

Test date: Aug-2014

Test sponsor: IBM Corporation

Hardware Availability: Jun-2014

Tested by: IBM Corporation

Software Availability: Nov-2013

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	80	796	982	790	989	797	981	80	665	1180	667	1170	672	1160
401.bzip2	80	1233	626	1236	625	1235	625	80	1214	636	1216	635	1212	637
403.gcc	80	676	953	676	952	676	953	80	676	953	676	952	676	953
429.mcf	80	416	1750	417	1750	416	1750	80	416	1750	417	1750	416	1750
445.gobmk	80	859	977	858	978	858	978	80	824	1020	842	996	842	997
456.hammer	80	407	1830	408	1830	408	1830	80	386	1930	387	1930	386	1940
458.sjeng	80	1003	965	1003	965	1002	966	80	959	1010	958	1010	958	1010
462.libquantum	80	189	8780	189	8770	189	8780	80	189	8780	189	8770	189	8780
464.h264ref	80	1043	1700	1047	1690	1072	1650	80	1043	1700	1047	1690	1072	1650
471.omnetpp	80	804	622	804	622	807	619	80	759	659	760	658	759	658
473.astar	80	786	714	787	713	788	713	80	786	714	787	713	788	713
483.xalancbmk	80	403	1370	403	1370	405	1360	80	403	1370	403	1370	405	1360

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Operating Mode set to Maximum Performance in BIOS

Memory Data Scrambling Disabled

Patrol Scrub Disabled

Sysinfo program /cpu2006.1.2_14.0_aug2013/config/sysinfo.rev6818

\$Rev: 6818 \$ \$Date::: 2012-07-17 #\\$ e86d102572650a6e4d596a3cee98f191

running on newport-rhel6.5 Sat Aug 9 20:15:13 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E7-4830 v2 @ 2.20GHz

4 "physical id"s (chips)

80 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM Flex System x480 X6
(Intel Xeon E7-4830 v2, 2.20 GHz)

SPECint_rate2006 = 1300

SPECint_rate_base2006 = 1260

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Aug-2014

Hardware Availability: Jun-2014

Software Availability: Nov-2013

Platform Notes (Continued)

```
caution.)
cpu cores : 10
siblings : 20
physical 0: cores 0 1 2 3 4 8 9 10 11 12
physical 1: cores 0 1 2 3 4 8 9 10 11 12
physical 2: cores 0 1 2 3 4 8 9 10 11 12
physical 3: cores 0 1 2 3 4 8 9 10 11 12
cache size : 20480 KB

From /proc/meminfo
MemTotal:      1058508292 kB
HugePages_Total:        0
Hugepagesize:     2048 kB

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.5 (Santiago)

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
Linux newport-rhel6.5 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST
2013 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Aug 9 18:57 last=5

SPEC is set to: /cpu2006.1.2_14.0_aug2013
Filesystem              Type  Size  Used  Avail Use% Mounted on
/dev/mapper/vg_newportrhel6-lv_root ext4  265G   29G  223G  12% /
Additional information from dmidecode:
BIOS IBM -[N2E107JUS-1.00]- 05/03/2014
Memory:
 32x Hynix HMT42GR7AFR4A-PB 16 GB 1067 MHz 2 rank
 32x NO DIMM Unknown
 32x Samsung M393B2G70QH0-YK0 16 GB 1067 MHz 2 rank

(End of data from sysinfo program)
```

General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/cpu2006.1.2_14.0_aug2013/lib32:/cpu2006.1.2_14.0_aug2013/lib64:/cpu2006.1.2_14.0_aug2013/sh"
```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM Flex System x480 X6
(Intel Xeon E7-4830 v2, 2.20 GHz)

SPECint_rate2006 = 1300

SPECint_rate_base2006 = 1260

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Aug-2014

Hardware Availability: Jun-2014

Software Availability: Nov-2013

General Notes (Continued)

```
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc -m32
```

C++ benchmarks:

```
icpc -m32
```

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/sh -lsmartheap
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m32
```

400.perlbench: icc -m64

401.bzip2: icc -m64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM Flex System x480 X6
(Intel Xeon E7-4830 v2, 2.20 GHz)

SPECint_rate2006 = 1300

SPECint_rate_base2006 = 1260

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Aug-2014

Hardware Availability: Jun-2014

Software Availability: Nov-2013

Peak Compiler Invocation (Continued)

456.hmmr: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

401.bzip2: -DSPEC_CPU_LP64

456.hmmr: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmr: -xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll14 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM Flex System x480 X6
(Intel Xeon E7-4830 v2, 2.20 GHz)

SPECint_rate2006 = 1300

SPECint_rate_base2006 = 1260

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Aug-2014

Hardware Availability: Jun-2014

Software Availability: Nov-2013

Peak Optimization Flags (Continued)

C++ benchmarks:

```
471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
             -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
             -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
             -L/sh -lsmartheap
```

```
473.astar: basepeak = yes
```

```
483.xalancbmk: basepeak = yes
```

Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.html>

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.xml>

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Sep 10 16:12:25 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 9 September 2014.