



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL360 Gen9  
(3.20 GHz, Intel Xeon E5-2667 v3)

**SPECint®2006 = 65.8**

**SPECint\_base2006 = 62.7**

**CPU2006 license:** 3


**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Aug-2014

**Hardware Availability:** Sep-2014

**Software Availability:** Jun-2014

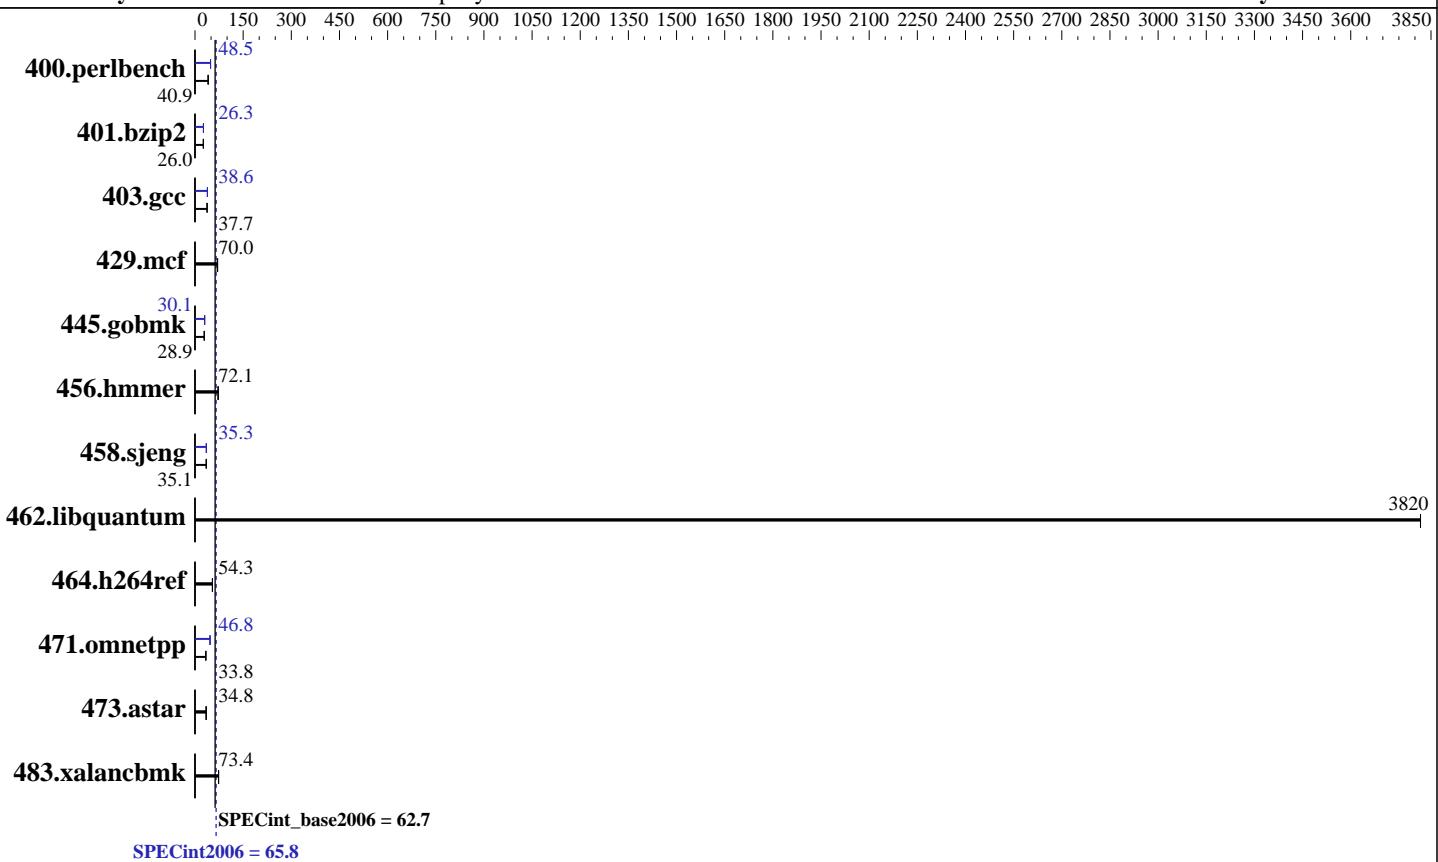

### Hardware

CPU Name: Intel Xeon E5-2667 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz  
 CPU MHz: 3200  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 1 chip, 8 cores/chip  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (8 x 16 GB 2Rx4 PC4-2133P-R)  
 Disk Subsystem: 1 x 400 GB SAS SSD, RAID 0  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)  
 Compiler: Kernel 3.10.0-123.el7.x86\_64  
 C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux  
 Auto Parallel: Yes  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL360 Gen9  
(3.20 GHz, Intel Xeon E5-2667 v3)

**SPECint2006 = 65.8**

**SPECint\_base2006 = 62.7**

CPU2006 license: 3

Test date: Aug-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2014

Tested by: Hewlett-Packard Company

Software Availability: Jun-2014

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	239	40.9	237	41.2	<b><u>239</u></b>	<b><u>40.9</u></b>	202	48.4	<b><u>202</u></b>	<b><u>48.5</u></b>	201	48.6
401.bzip2	370	26.1	<b><u>371</u></b>	<b><u>26.0</u></b>	371	26.0	<b><u>367</u></b>	<b><u>26.3</u></b>	367	26.3	367	26.3
403.gcc	<b><u>214</u></b>	<b><u>37.7</u></b>	214	37.7	213	37.8	<b><u>208</u></b>	<b><u>38.6</u></b>	207	38.9	209	38.5
429.mcf	<b><u>130</u></b>	<b><u>70.0</u></b>	132	69.0	129	70.6	<b><u>130</u></b>	<b><u>70.0</u></b>	132	69.0	129	70.6
445.gobmk	364	28.8	363	28.9	<b><u>364</u></b>	<b><u>28.9</u></b>	<b><u>349</u></b>	<b><u>30.1</u></b>	349	30.1	349	30.1
456.hmmer	<b><u>129</u></b>	<b><u>72.1</u></b>	130	71.9	129	72.3	<b><u>129</u></b>	<b><u>72.1</u></b>	130	71.9	129	72.3
458.sjeng	<b><u>345</u></b>	<b><u>35.1</u></b>	345	35.1	345	35.1	<b><u>343</u></b>	<b><u>35.3</u></b>	<b><u>342</u></b>	<b><u>35.3</u></b>	<b><u>342</u></b>	<b><u>35.3</u></b>
462.libquantum	5.43	3820	<b><u>5.43</u></b>	<b><u>3820</u></b>	5.43	3820	<b><u>5.43</u></b>	<b><u>3820</u></b>	<b><u>5.43</u></b>	<b><u>3820</u></b>	5.43	3820
464.h264ref	407	54.4	408	54.2	<b><u>408</u></b>	<b><u>54.3</u></b>	407	54.4	408	54.2	<b><u>408</u></b>	<b><u>54.3</u></b>
471.omnetpp	<b><u>185</u></b>	<b><u>33.8</u></b>	184	33.9	186	33.6	<b><u>134</u></b>	<b><u>46.8</u></b>	133	46.9	134	46.7
473.astar	201	34.9	202	34.7	<b><u>202</u></b>	<b><u>34.8</u></b>	201	34.9	202	34.7	<b><u>202</u></b>	<b><u>34.8</u></b>
483.xalancbmk	93.8	73.5	94.1	73.4	<b><u>94.0</u></b>	<b><u>73.4</u></b>	93.8	73.5	94.1	73.4	<b><u>94.0</u></b>	<b><u>73.4</u></b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/transparent\_hugepage/enabled

## Platform Notes

BIOS Configuration:

Intel Hyperthreading set to Disabled  
HP Power Profile set to Maximum Performance  
Thermal Configuration set to Maximum Cooling  
Collaborative Power Control set to Disabled  
QPI Snoop Configuration set to Early Snoop  
Processor Power and Utilization Monitoring set to Disabled  
Memory Patrol Scrubbing set to Disabled  
Memory Refresh Rate set to 1x Refresh

Sysinfo program /home/cpu2006/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
running on localhost.localdomain Wed Aug 13 03:54:45 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>  
Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL360 Gen9  
(3.20 GHz, Intel Xeon E5-2667 v3)

**SPECint2006 = 65.8**

**SPECint\_base2006 = 62.7**

**CPU2006 license:** 3

**Test date:** Aug-2014

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Sep-2014

**Tested by:** Hewlett-Packard Company

**Software Availability:** Jun-2014

## Platform Notes (Continued)

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2667 v3 @ 3.20GHz
        1 "physical id"s (chips)
        8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 8
    siblings   : 8
    physical 0: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal:      131735708 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
    NAME="Red Hat Enterprise Linux Server"
    VERSION="7.0 (Maipo)"
    ID="rhel"
    ID_LIKE="fedora"
    VERSION_ID="7.0"
    PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
    ANSI_COLOR="0;31"
    CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server
```

```
uname -a:
Linux localhost.localdomain 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57
EDT 2014 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Aug 13 03:50
```

```
SPEC is set to: /home/cpu2006
Filesystem           Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   318G  4.1G  314G   2%  /home
```

Additional information from dmidecode:

```
BIOS HP P89 07/11/2014
Memory:
 8x HP NOT AVAILABLE 16 GB 2133 MHz 2 rank
 16x UNKNOWN NOT AVAILABLE
```

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of
memory is 128 GB and the dmidecode description should have one line reading as:

```
8x HP NOT AVAILABLE 16 GB 2133 MHz 2 rank
```



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL360 Gen9  
(3.20 GHz, Intel Xeon E5-2667 v3)

**SPECint2006 = 65.8**

**SPECint\_base2006 = 62.7**

**CPU2006 license:** 3

**Test date:** Aug-2014

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Sep-2014

**Tested by:** Hewlett-Packard Company

**Software Availability:** Jun-2014

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"

LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

OMP\_NUM\_THREADS = "8"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB  
memory using RedHat EL 6.4

## Base Compiler Invocation

C benchmarks:

  icc -m64

C++ benchmarks:

  icpc -m64

## Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 403.gcc: -DSPEC_CPU_LP64
 429.mcf: -DSPEC_CPU_LP64
 445.gobmk: -DSPEC_CPU_LP64
 456.hammer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 471.omnetpp: -DSPEC_CPU_LP64
 473.astar: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```

## Base Optimization Flags

C benchmarks:

  -xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:

  -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
  -Wl,-z,muldefs -L/sh -lsmartheap64

## Base Other Flags

C benchmarks:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL360 Gen9  
(3.20 GHz, Intel Xeon E5-2667 v3)

**SPECint2006 = 65.8**

**SPECint\_base2006 = 62.7**

CPU2006 license: 3

Test date: Aug-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2014

Tested by: Hewlett-Packard Company

Software Availability: Jun-2014

## Base Other Flags (Continued)

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32

445.gobmk: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

471.omnetpp: icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

401.bzip2: -DSPEC\_CPU\_LP64

403.gcc: -DSPEC\_CPU\_LP64

429.mcf: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

464.h264ref: -DSPEC\_CPU\_LP64

473.astar: -DSPEC\_CPU\_LP64

483.xalancbmk: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -ansi-alias

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32  
-opt-prefetch -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc  
-opt-malloc-options=3 -auto-ilp32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL360 Gen9  
(3.20 GHz, Intel Xeon E5-2667 v3)

**SPECint2006 = 65.8**

**SPECint\_base2006 = 62.7**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Aug-2014

**Hardware Availability:** Sep-2014

**Software Availability:** Jun-2014

## Peak Optimization Flags (Continued)

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias

456.hmmr: basepeak = yes

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll14

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-ra-region-strategy=block  
-Wl,-z,muldefs -L/sh -lsmartheap  
-ansi-alias

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revA.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL360 Gen9  
(3.20 GHz, Intel Xeon E5-2667 v3)

**SPECint2006 = 65.8**

**SPECint\_base2006 = 62.7**

**CPU2006 license:** 3

**Test date:** Aug-2014

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Sep-2014

**Tested by:** Hewlett-Packard Company

**Software Availability:** Jun-2014

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Sep 24 16:19:31 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 24 September 2014.