



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge R730 (Intel Xeon E5-2699 v3, 2.30 GHz)

SPECint®\_rate2006 = 1370

SPECint\_rate\_base2006 = 1330

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: May-2014

Hardware Availability: Sep-2014

Software Availability: Sep-2014

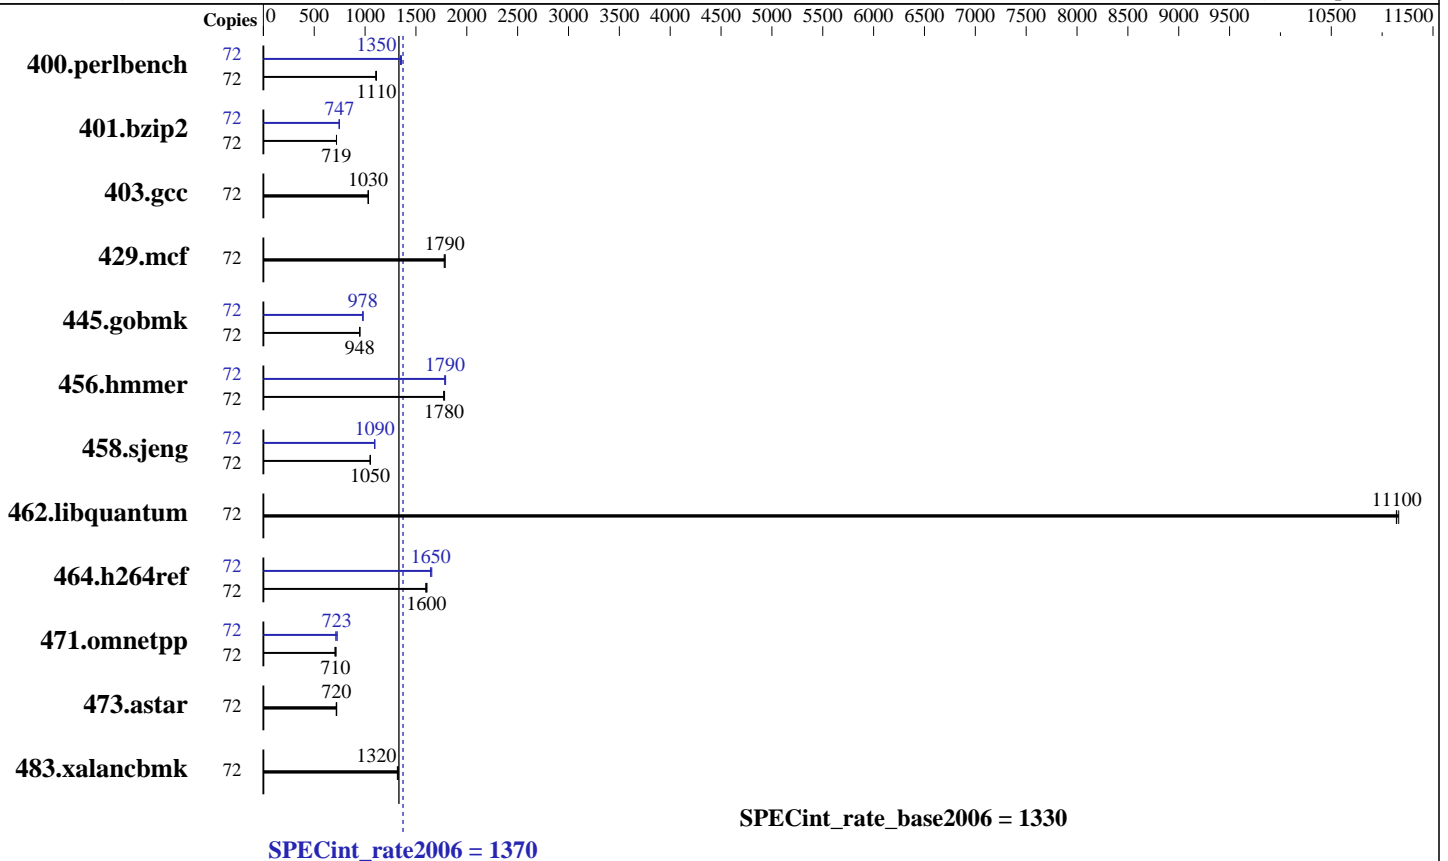

**Hardware**

CPU Name: Intel Xeon E5-2699 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz  
 CPU MHz: 2300  
 FPU: Integrated  
 CPU(s) enabled: 36 cores, 2 chips, 18 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 45 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)  
 Disk Subsystem: 1 x 100 GB SSD  
 Other Hardware: None

**Software**

Operating System: SUSE Linux Enterprise Server 11 (x86\_64) 3.0.76-0.11-default  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext2  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 1370

PowerEdge R730 (Intel Xeon E5-2699 v3, 2.30 GHz)

SPECint\_rate\_base2006 = 1330

CPU2006 license: 55

Test date: May-2014

Test sponsor: Dell Inc.

Hardware Availability: Sep-2014

Tested by: Dell Inc.

Software Availability: Sep-2014

## Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	72	633	1110	<b>633</b>	<b>1110</b>	637	1100	72	518	1360	522	1350	<b>520</b>	<b>1350</b>
401.bzip2	72	967	719	<b>967</b>	<b>719</b>	966	719	72	934	744	929	748	<b>930</b>	<b>747</b>
403.gcc	72	562	1030	<b>562</b>	<b>1030</b>	562	1030	72	562	1030	<b>562</b>	<b>1030</b>	562	1030
429.mcf	72	369	1780	368	1790	<b>368</b>	<b>1790</b>	72	369	1780	368	1790	<b>368</b>	<b>1790</b>
445.gobmk	72	797	947	<b>797</b>	<b>948</b>	796	948	72	770	980	<b>772</b>	<b>978</b>	773	977
456.hammer	72	<b>378</b>	<b>1780</b>	377	1780	379	1770	72	377	1780	<b>376</b>	<b>1790</b>	375	1790
458.sjeng	72	<b>830</b>	<b>1050</b>	830	1050	827	1050	72	797	1090	796	1100	<b>796</b>	<b>1090</b>
462.libquantum	72	134	11100	134	11200	<b>134</b>	<b>11100</b>	72	134	11100	134	11200	<b>134</b>	<b>11100</b>
464.h264ref	72	998	1600	990	1610	<b>994</b>	<b>1600</b>	72	<b>968</b>	<b>1650</b>	962	1660	969	1640
471.omnetpp	72	630	715	640	703	<b>634</b>	<b>710</b>	72	632	712	<b>622</b>	<b>723</b>	621	725
473.astar	72	<b>702</b>	<b>720</b>	702	720	706	716	72	<b>702</b>	<b>720</b>	702	720	706	716
483.xalancbmk	72	375	1330	377	1320	<b>376</b>	<b>1320</b>	72	375	1330	377	1320	<b>376</b>	<b>1320</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS settings:  
Virtualization Technology disabled  
Execute Disable disabled  
Snoop Mode set to Cluster on Die  
System Profile set to Performance  
Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
running on linux Tue May 13 17:10:49 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E5-2699 v3 @ 2.30GHz  
2 "physical id"s (chips)  
72 "processors"

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 1370

PowerEdge R730 (Intel Xeon E5-2699 v3, 2.30 GHz)

SPECint\_rate\_base2006 = 1330

CPU2006 license: 55

Test date: May-2014

Test sponsor: Dell Inc.

Hardware Availability: Sep-2014

Tested by: Dell Inc.

Software Availability: Sep-2014

## Platform Notes (Continued)

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 18
siblings  : 36
physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
cache size : 23040 KB
```

From /proc/meminfo

```
MemTotal:      264575716 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

/usr/bin/lsb\_release -d

```
SUSE Linux Enterprise Server 11 (x86_64)
```

From /etc/\*release\* /etc/\*version\*

```
SuSE-release:
SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 3
```

uname -a:

```
Linux linux 3.0.76-0.11-default #1 SMP Fri Jun 14 08:21:43 UTC 2013 (ccab990)
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 May 13 17:07 last=S

SPEC is set to: /root/cpu2006-1.2

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        ext2  88G   11G   77G  12% /
```

Additional information from dmidecode:

```
BIOS Dell Inc. 0.3.19 05/12/2014
Memory:
6x 00AD063200AD HMA42GR7MFR4N-TFT1 16 GB 2133 MHz
10x 00CE00B300CE M393A2G40DB0-CPB 16 GB 2133 MHz
8x Not Specified Not Specified
```

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"
```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org  
http://www.spec.org/

Page 3



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

**SPECint\_rate2006 = 1370**

PowerEdge R730 (Intel Xeon E5-2699 v3,  
2.30 GHz)

**SPECint\_rate\_base2006 = 1330**

**CPU2006 license:** 55  
**Test sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test date:** May-2014  
**Hardware Availability:** Sep-2014  
**Software Availability:** Sep-2014

## General Notes (Continued)

Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:  
icc -m32

C++ benchmarks:  
icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3

C++ benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32

400.perlbench: icc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R730 (Intel Xeon E5-2699 v3,  
2.30 GHz)

**SPECint\_rate2006 = 1370**

**SPECint\_rate\_base2006 = 1330**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** May-2014

**Hardware Availability:** Sep-2014

**Software Availability:** Sep-2014

## Peak Compiler Invocation (Continued)

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32`

## Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`  
401.bzip2: `-DSPEC_CPU_LP64`  
456.hmmer: `-DSPEC_CPU_LP64`  
458.sjeng: `-DSPEC_CPU_LP64`  
462.libquantum: `-DSPEC_CPU_LINUX`  
483.xalancbmk: `-DSPEC_CPU_LINUX`

## Peak Optimization Flags

C benchmarks:

400.perlbench: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-auto-ilp32`

401.bzip2: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-opt-prefetch -auto-ilp32 -ansi-alias`

403.gcc: `basepeak = yes`

429.mcf: `basepeak = yes`

445.gobmk: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)`  
`-ansi-alias -opt-mem-layout-trans=3`

456.hmmer: `-xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32`

458.sjeng: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-unroll4 -auto-ilp32`

462.libquantum: `basepeak = yes`

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

**SPECint\_rate2006 = 1370**

PowerEdge R730 (Intel Xeon E5-2699 v3, 2.30 GHz)

**SPECint\_rate\_base2006 = 1330**

**CPU2006 license:** 55

**Test date:** May-2014

**Test sponsor:** Dell Inc.

**Hardware Availability:** Sep-2014

**Tested by:** Dell Inc.

**Software Availability:** Sep-2014

## Peak Optimization Flags (Continued)

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.html>  
<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.xml>  
<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Wed Sep 24 16:21:40 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 24 September 2014.