



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Inspur Corporation TS860

SPECint®_rate2006 = 3220

SPECint_rate_base2006 = 3130

CPU2006 license: 3358


Test sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test date: Jan-2014

Hardware Availability: May-2014

Software Availability: Nov-2013

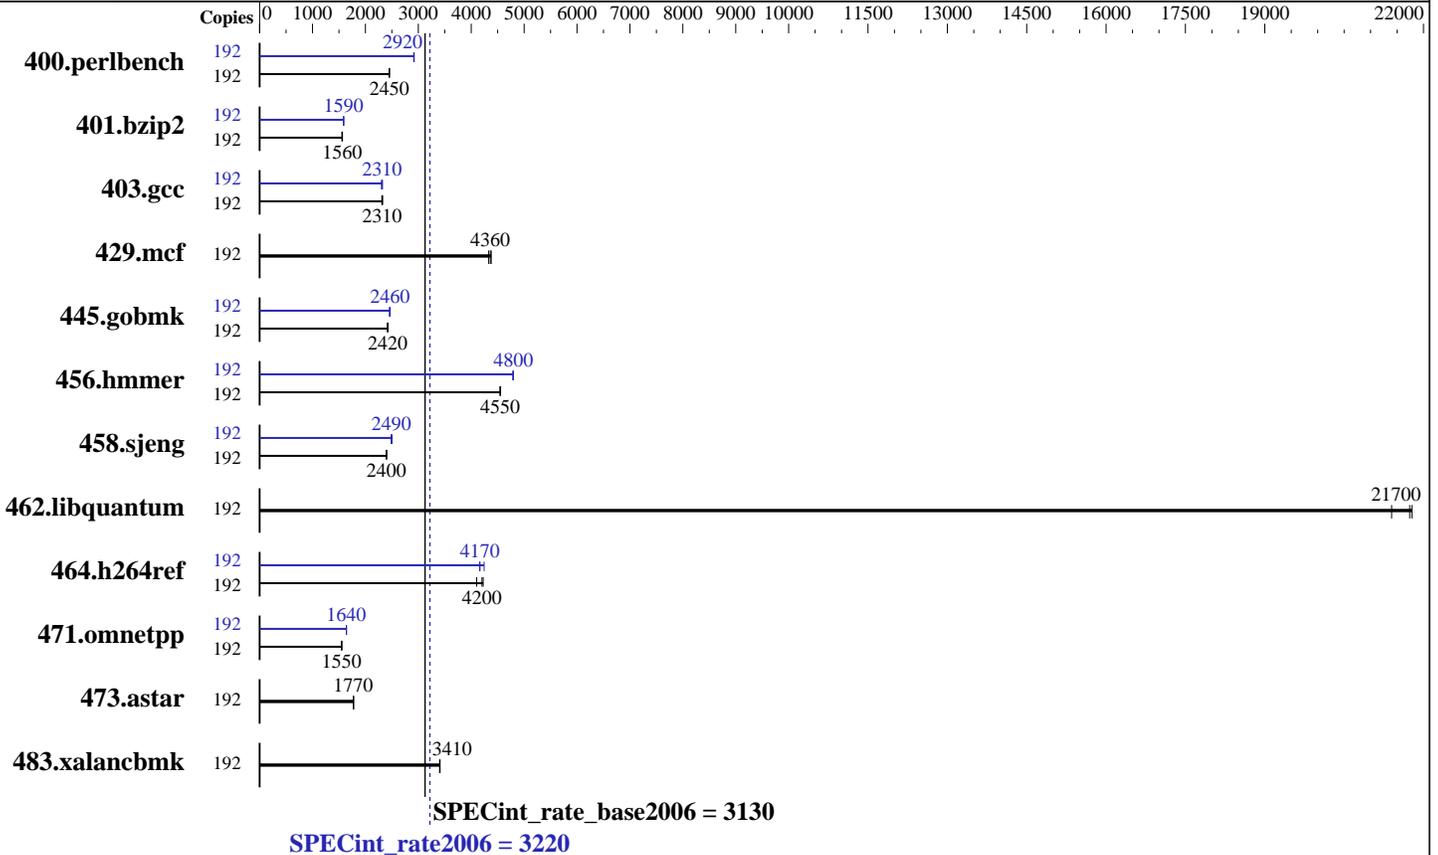

Hardware

CPU Name: Intel Xeon E7-8850 v2
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz
 CPU MHz: 2300
 FPU: Integrated
 CPU(s) enabled: 96 cores, 8 chips, 12 cores/chip, 2 threads/core
 CPU(s) orderable: 8 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 24 MB I+D on chip per chip
 Other Cache: None
 Memory: 2 TB (128 x 16 GB 2Rx4 PC3-12800R-11, ECC, running at 1333 MHz)

Disk Subsystem: 1800GB (4 x 900GB SAS,RAID1,10K RPM)
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)
 2.6.32-431.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Inspur Corporation
TS860

SPECint_rate2006 = 3220

SPECint_rate_base2006 = 3130

CPU2006 license: 3358
Test sponsor: Inspur Corporation
Tested by: Inspur Corporation

Test date: Jan-2014
Hardware Availability: May-2014
Software Availability: Nov-2013

Results Table

| Benchmark | Base | | | | | | Peak | | | | | | | |
|----------------|--------|--------------------|--------------------|-------------------|---------------------|--------------------|--------------------|--------|--------------------|--------------------|--------------------|---------------------|-------------------|--------------------|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 400.perlbench | 192 | 764 | 2450 | <u>765</u> | <u>2450</u> | 765 | 2450 | 192 | <u>642</u> | <u>2920</u> | 644 | 2910 | 642 | 2920 |
| 401.bzip2 | 192 | 1191 | 1560 | 1183 | 1570 | <u>1186</u> | <u>1560</u> | 192 | 1167 | 1590 | <u>1167</u> | <u>1590</u> | 1166 | 1590 |
| 403.gcc | 192 | 668 | 2310 | <u>668</u> | <u>2310</u> | 664 | 2330 | 192 | 665 | 2320 | <u>668</u> | <u>2310</u> | 671 | 2300 |
| 429.mcf | 192 | <u>402</u> | <u>4360</u> | 400 | 4380 | 404 | 4330 | 192 | <u>402</u> | <u>4360</u> | 400 | 4380 | 404 | 4330 |
| 445.gobmk | 192 | <u>831</u> | <u>2420</u> | 834 | 2410 | 831 | 2420 | 192 | <u>817</u> | <u>2460</u> | 816 | 2470 | 821 | 2450 |
| 456.hammer | 192 | 394 | 4540 | 393 | 4560 | <u>394</u> | <u>4550</u> | 192 | 373 | 4800 | 374 | 4780 | <u>373</u> | <u>4800</u> |
| 458.sjeng | 192 | 968 | 2400 | 970 | 2400 | <u>968</u> | <u>2400</u> | 192 | 928 | 2500 | 934 | 2490 | <u>933</u> | <u>2490</u> |
| 462.libquantum | 192 | 183 | 21800 | <u>183</u> | <u>21700</u> | 186 | 21400 | 192 | 183 | 21800 | <u>183</u> | <u>21700</u> | 186 | 21400 |
| 464.h264ref | 192 | <u>1011</u> | <u>4200</u> | 1006 | 4230 | 1036 | 4100 | 192 | <u>1020</u> | <u>4170</u> | 1022 | 4160 | 1001 | 4240 |
| 471.omnetpp | 192 | 772 | 1560 | <u>774</u> | <u>1550</u> | 775 | 1550 | 192 | <u>731</u> | <u>1640</u> | 732 | 1640 | 731 | 1640 |
| 473.astar | 192 | 758 | 1780 | <u>760</u> | <u>1770</u> | 760 | 1770 | 192 | 758 | 1780 | <u>760</u> | <u>1770</u> | 760 | 1770 |
| 483.xalancbmk | 192 | 389 | 3400 | 388 | 3410 | <u>389</u> | <u>3410</u> | 192 | 389 | 3400 | 388 | 3410 | <u>389</u> | <u>3410</u> |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Sysinfo program /spec/config/sysinfo.rev6818
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191
running on ts860 Thu Jan 30 19:18:49 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E7-8850 v2 @ 2.30GHz
8 "physical id"s (chips)
192 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 12
siblings : 24

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Inspur Corporation
TS860

SPECint_rate2006 = 3220

SPECint_rate_base2006 = 3130

CPU2006 license: 3358

Test sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test date: Jan-2014

Hardware Availability: May-2014

Software Availability: Nov-2013

Platform Notes (Continued)

```

physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 13
physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 13
physical 4: cores 0 1 2 3 4 5 8 9 10 11 12 13
physical 5: cores 0 1 2 3 4 5 8 9 10 11 12 13
physical 6: cores 0 1 2 3 4 5 8 9 10 11 12 13
physical 7: cores 0 1 2 3 4 5 8 9 10 11 12 13
cache size : 24576 KB

```

From /proc/meminfo

```

MemTotal:      2117644348 kB
HugePages_Total: 0
Hugepagesize:  2048 kB

```

From /etc/*release* /etc/*version*

```

redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

```

uname -a:

```

Linux ts860 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013 x86_64
x86_64 x86_64 GNU/Linux

```

run-level 3 Jan 30 19:12

SPEC is set to: /spec

```

Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       ext4  673G  4.0G  635G   1% /spec

```

Additional information from dmidecode:

BIOS INSYDE Corp. TS860_1.1.2 06/24/2014

Memory:

```

128x  16 GB
64x NO DIMM Unknown
128x Samsung M393B2G70QH0-YK0 16 GB 1333 MHz 2 rank

```

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 2 TB and the dmidecode description should have two lines reading as:

```

128x Samsung M393B2G70QH0-YK0 16 GB 1333 MHz 2 rank
64x NO DIMM Unknown

```

To lock the memory in 1333MHz, the setting "Force 1333MHz" must be enabled.

The setting "Force 1333MHz" can be enabled in BIOS version 1.1.2, which was an old design with the Intel latest MRC update.

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64:/spec/sh"

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Inspur Corporation
TS860

SPECint_rate2006 = 3220

SPECint_rate_base2006 = 3130

CPU2006 license: 3358

Test sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test date: Jan-2014

Hardware Availability: May-2014

Software Availability: Nov-2013

General Notes (Continued)

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:
icc -m32

C++ benchmarks:
icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/sh -lsmartheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Inspur Corporation
TS860

SPECint_rate2006 = 3220

SPECint_rate_base2006 = 3130

CPU2006 license: 3358

Test sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test date: Jan-2014

Hardware Availability: May-2014

Software Availability: Nov-2013

Peak Compiler Invocation (Continued)

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

401.bzip2: -DSPEC_CPU_LP64

456.hmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Inspur Corporation
TS860

SPECint_rate2006 = 3220

SPECint_rate_base2006 = 3130

CPU2006 license: 3358

Test sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test date: Jan-2014

Hardware Availability: May-2014

Software Availability: Nov-2013

Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.html>

<http://www.spec.org/cpu2006/flags/Inspur-Platform-Settings-V1.3-IVB-RevG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.xml>

<http://www.spec.org/cpu2006/flags/Inspur-Platform-Settings-V1.3-IVB-RevG.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Oct 16 12:00:09 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 16 October 2014.