



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

**SPECint®2006 = 45.4**

Express5800/T110g-E (Intel Pentium G3240)

**SPECint\_base2006 = 43.6**

CPU2006 license: 9006


Test date: Aug-2014

Test sponsor: NEC Corporation

Hardware Availability: Jul-2014

Tested by: NEC Corporation

Software Availability: Jan-2014

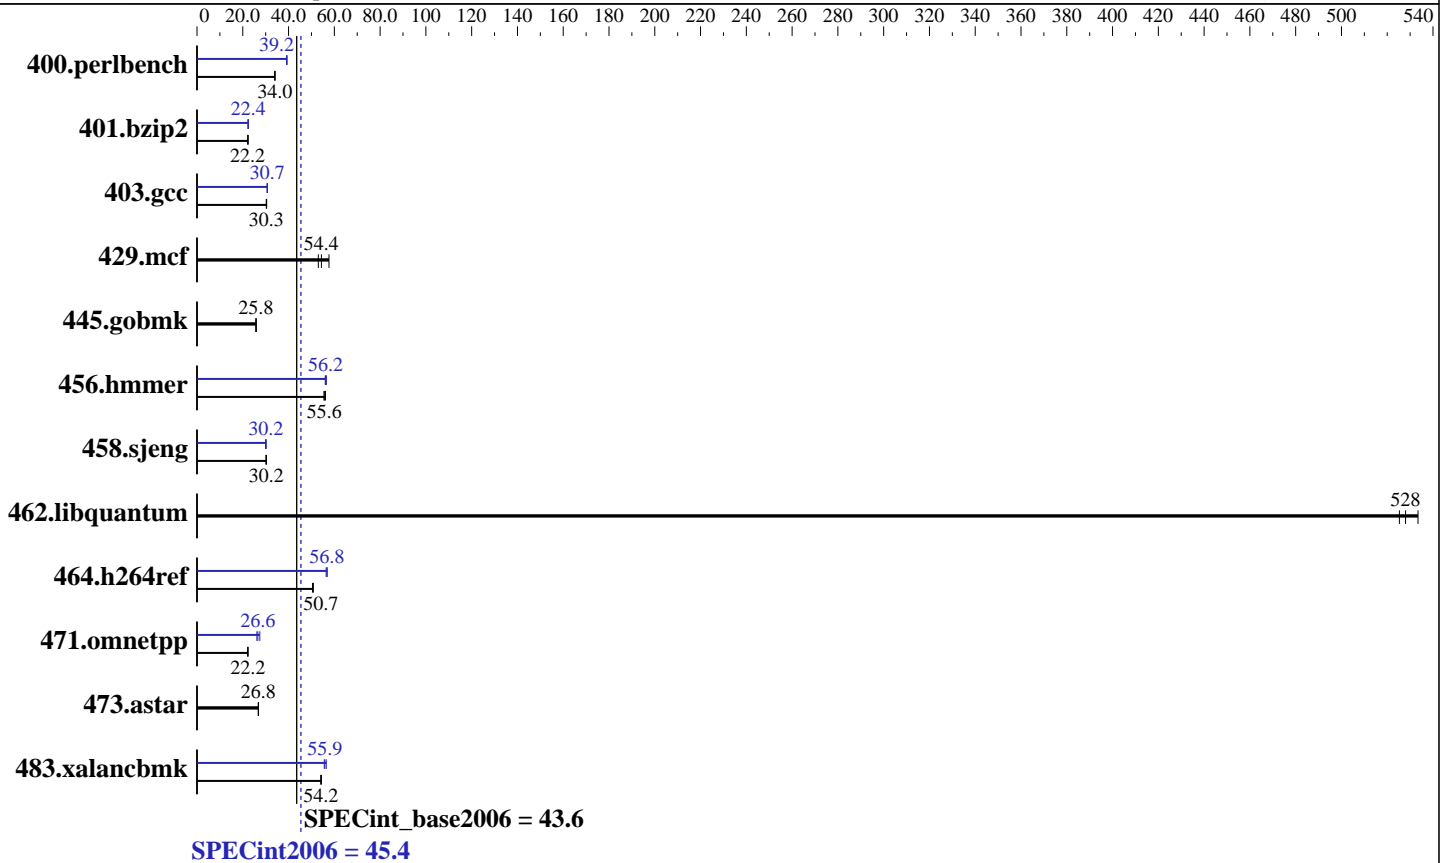

### Hardware

CPU Name: Intel Pentium G3240  
 CPU Characteristics: 3100  
 CPU MHz: Integrated  
 FPU: Integrated  
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 3 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 16 GB (2 x 8 GB 2Rx8 PC3-12800E-11, ECC, running at 1333 MHz and CL9)  
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
 Kernel: 2.6.32-431.el6.x86\_64  
 Compiler: C/C++: Version 14.0.2.144 of Intel C++ Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint2006 = 45.4

Express5800/T110g-E (Intel Pentium G3240)

SPECint\_base2006 = 43.6

CPU2006 license: 9006

Test date: Aug-2014

Test sponsor: NEC Corporation

Hardware Availability: Jul-2014

Tested by: NEC Corporation

Software Availability: Jan-2014

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	288	34.0	287	34.1	<b><u>287</u></b>	<b><u>34.0</u></b>	250	39.1	<b><u>249</u></b>	<b><u>39.2</u></b>	248	39.4
401.bzip2	432	22.3	<b><u>435</u></b>	<b><u>22.2</u></b>	435	22.2	433	22.3	<b><u>432</u></b>	<b><u>22.4</u></b>	431	22.4
403.gcc	264	30.4	<b><u>266</u></b>	<b><u>30.3</u></b>	266	30.3	<b><u>262</u></b>	<b><u>30.7</u></b>	262	30.7	263	30.7
429.mcf	158	57.7	172	53.0	<b><u>168</u></b>	<b><u>54.4</u></b>	158	57.7	172	53.0	<b><u>168</u></b>	<b><u>54.4</u></b>
445.gobmk	406	25.8	407	25.7	<b><u>406</u></b>	<b><u>25.8</u></b>	406	25.8	407	25.7	<b><u>406</u></b>	<b><u>25.8</u></b>
456.hammer	168	55.5	<b><u>168</u></b>	<b><u>55.6</u></b>	166	56.2	167	56.0	<b><u>166</u></b>	<b><u>56.2</u></b>	165	56.5
458.sjeng	400	30.2	401	30.2	<b><u>400</u></b>	<b><u>30.2</u></b>	<b><u>401</u></b>	<b><u>30.2</u></b>	401	30.2	404	30.0
462.libquantum	38.8	533	39.4	525	<b><u>39.2</u></b>	<b><u>528</u></b>	38.8	533	39.4	525	<b><u>39.2</u></b>	<b><u>528</u></b>
464.h264ref	<b><u>436</u></b>	<b><u>50.7</u></b>	436	50.7	438	50.5	389	56.9	<b><u>390</u></b>	<b><u>56.8</u></b>	392	56.4
471.omnetpp	281	22.3	282	22.2	<b><u>281</u></b>	<b><u>22.2</u></b>	<b><u>235</u></b>	<b><u>26.6</u></b>	239	26.2	228	27.4
473.astar	262	26.8	262	26.8	<b><u>262</u></b>	<b><u>26.8</u></b>	262	26.8	262	26.8	<b><u>262</u></b>	<b><u>26.8</u></b>
483.xalancbmk	127	54.4	128	54.1	<b><u>127</u></b>	<b><u>54.2</u></b>	122	56.5	124	55.6	<b><u>123</u></b>	<b><u>55.9</u></b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:  
Energy Performance: Performance

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,1,0"

LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

OMP\_NUM\_THREADS = "2"

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint2006 = 45.4

Express5800/T110g-E (Intel Pentium G3240)

SPECint\_base2006 = 43.6

CPU2006 license: 9006

Test date: Aug-2014

Test sponsor: NEC Corporation

Hardware Availability: Jul-2014

Tested by: NEC Corporation

Software Availability: Jan-2014

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
 401.bzip2: -DSPEC\_CPU\_LP64  
 403.gcc: -DSPEC\_CPU\_LP64  
 429.mcf: -DSPEC\_CPU\_LP64  
 445.gobmk: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
 464.h264ref: -DSPEC\_CPU\_LP64  
 471.omnetpp: -DSPEC\_CPU\_LP64  
 473.astar: -DSPEC\_CPU\_LP64  
 483.xalancbmk: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
 -xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:  
 -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
 -Wl,-z,muldefs -L/sh -lsmartheap64

## Base Other Flags

C benchmarks:  
 403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
 icc -m64

400.perlbench: icc -m32

464.h264ref: icc -m32

C++ benchmarks (except as noted below):  
 icpc -m32

473.astar: icpc -m64



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint2006 = 45.4

Express5800/T110g-E (Intel Pentium G3240)

SPECint\_base2006 = 43.6

CPU2006 license: 9006

Test date: Aug-2014

Test sponsor: NEC Corporation

Hardware Availability: Jul-2014

Tested by: NEC Corporation

Software Availability: Jan-2014

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
 401.bzip2: -DSPEC\_CPU\_LP64  
 403.gcc: -DSPEC\_CPU\_LP64  
 429.mcf: -DSPEC\_CPU\_LP64  
 445.gobmk: -DSPEC\_CPU\_LP64  
 456.hmmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
 473.astar: -DSPEC\_CPU\_LP64  
 483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -opt-prefetch -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32  
 -opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -inline-alloc  
 -opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: basepeak = yes

456.hmmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32  
 -ansi-alias

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -unroll4

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -opt-ra-region-strategy=block -ansi-alias  
 -Wl,-z,muldefs -L/sh -lsmartheap

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation	SPECint2006 =	45.4
Express5800/T110g-E (Intel Pentium G3240)	SPECint_base2006 =	43.6

CPU2006 license: 9006	Test date:	Aug-2014
Test sponsor: NEC Corporation	Hardware Availability:	Jul-2014
Tested by: NEC Corporation	Software Availability:	Jan-2014

## Peak Optimization Flags (Continued)

473.astar: basepeak = yes

483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias  
-Wl,-z,muldefs -L/sh -lsmartheap

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120-RevB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120-RevB.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
 For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
 Report generated on Wed Oct 8 19:40:25 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
 Originally published on 8 October 2014.