



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R730 (Intel Xeon E5-2698 v3,  
2.30 GHz)

**SPECfp®2006 = 105**

**SPECfp\_base2006 = 98.4**

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Sep-2014

Hardware Availability: Sep-2014

Software Availability: Sep-2014

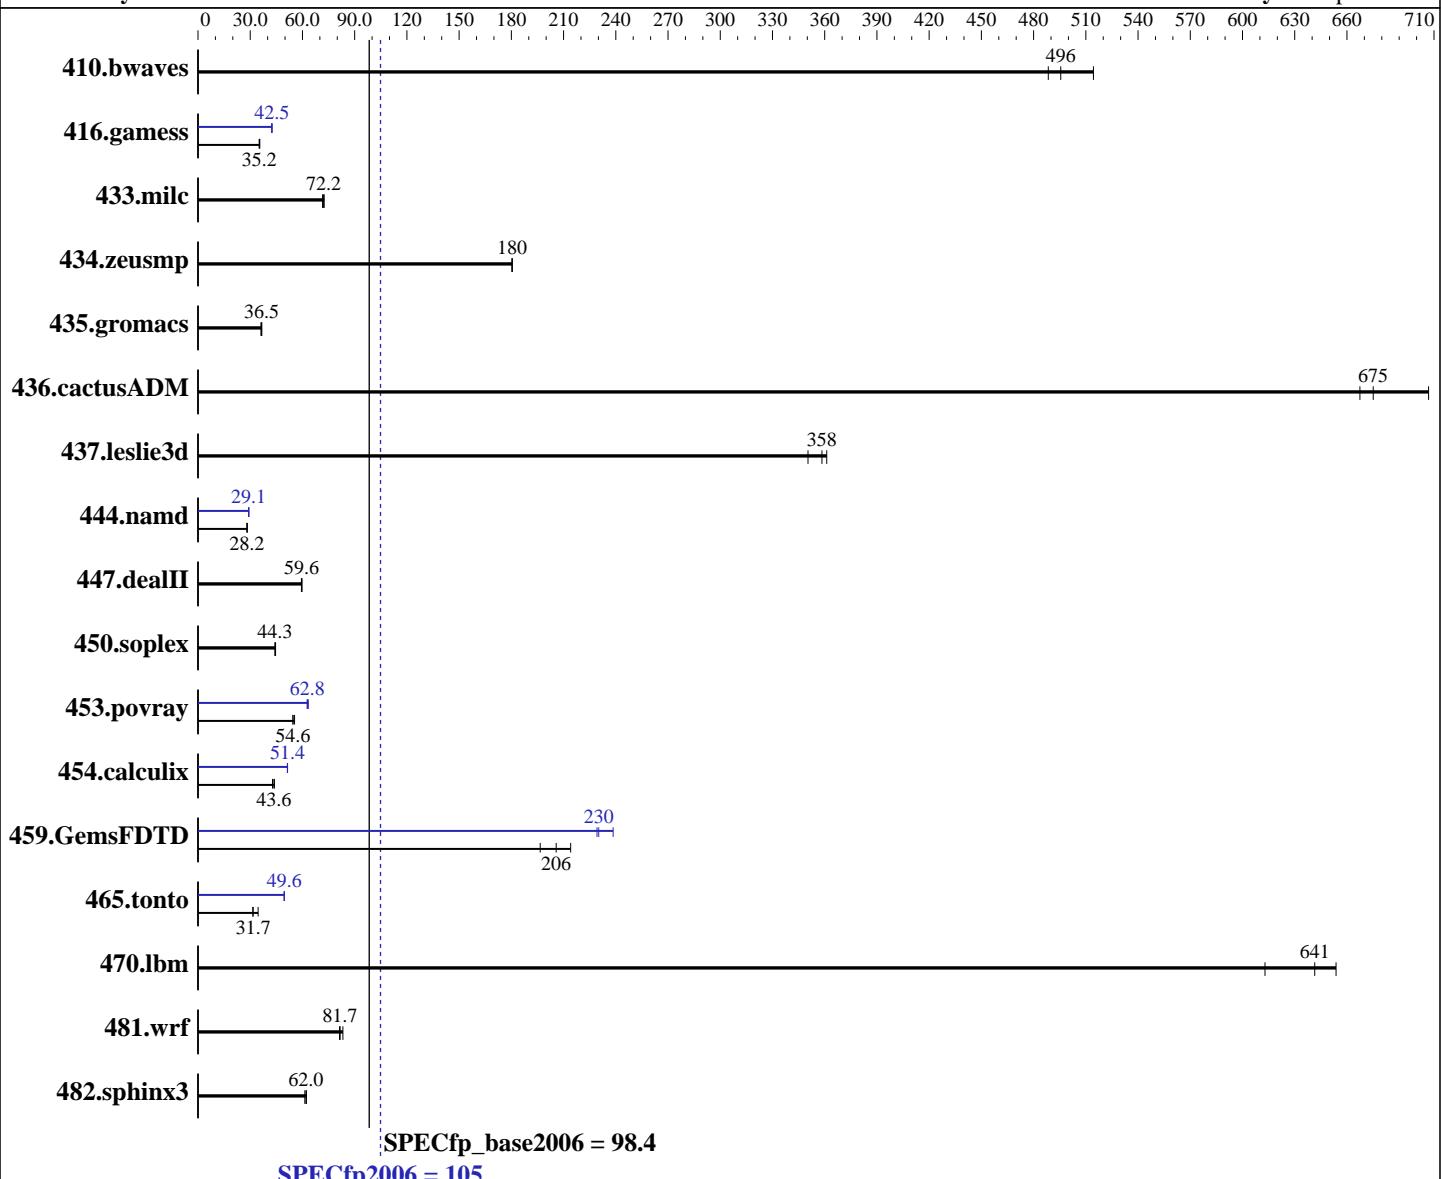

## Hardware

CPU Name: Intel Xeon E5-2698 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz  
 CPU MHz: 2300  
 FPU: Integrated  
 CPU(s) enabled: 32 cores, 2 chips, 16 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

## Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64)  
 3.0.76-0.11-default  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE  
 for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran  
 Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R730 (Intel Xeon E5-2698 v3,  
2.30 GHz)

**SPECfp2006 = 105**

**SPECfp\_base2006 = 98.4**

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Sep-2014

Hardware Availability: Sep-2014

Software Availability: Sep-2014

L3 Cache: 40 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)  
 Disk Subsystem: 1 x 250 GB 7200 RPM SATA  
 Other Hardware: None

Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	27.8	488	<b>27.4</b>	<b>496</b>	26.4	514	27.8	488	<b>27.4</b>	<b>496</b>	26.4	514
416.gamess	<b>556</b>	<b>35.2</b>	556	35.2	552	35.5	<b>460</b>	42.5	462	42.3	<b>461</b>	<b>42.5</b>
433.milc	127	72.5	<b>127</b>	<b>72.2</b>	128	71.5	<b>127</b>	72.5	<b>127</b>	<b>72.2</b>	128	71.5
434.zeusmp	50.4	180	50.4	180	<b>50.4</b>	<b>180</b>	50.4	180	50.4	180	<b>50.4</b>	<b>180</b>
435.gromacs	195	36.6	197	36.2	<b>196</b>	<b>36.5</b>	195	36.6	197	36.2	<b>196</b>	<b>36.5</b>
436.cactusADM	<b>17.7</b>	<b>675</b>	17.9	667	16.9	707	<b>17.7</b>	<b>675</b>	17.9	667	16.9	707
437.leslie3d	<b>26.2</b>	<b>358</b>	26.0	361	26.8	350	<b>26.2</b>	<b>358</b>	26.0	361	26.8	350
444.namd	<b>284</b>	<b>28.2</b>	284	28.2	285	28.2	<b>275</b>	29.2	275	29.1	<b>275</b>	<b>29.1</b>
447.dealII	<b>192</b>	<b>59.6</b>	193	59.4	192	59.7	<b>192</b>	<b>59.6</b>	193	59.4	192	59.7
450.soplex	188	44.3	187	44.6	<b>188</b>	<b>44.3</b>	188	44.3	187	44.6	<b>188</b>	<b>44.3</b>
453.povray	<b>97.5</b>	<b>54.6</b>	97.5	54.5	95.9	55.5	84.0	63.4	<b>84.7</b>	<b>62.8</b>	84.8	62.7
454.calculix	193	42.8	<b>189</b>	<b>43.6</b>	188	43.9	<b>160</b>	<b>51.4</b>	161	51.3	160	51.4
459.GemsFDTD	<b>51.6</b>	<b>206</b>	54.0	197	49.6	214	46.3	229	44.5	238	<b>46.1</b>	<b>230</b>
465.tonto	<b>311</b>	<b>31.7</b>	285	34.5	313	31.5	<b>198</b>	49.6	199	49.5	<b>198</b>	<b>49.6</b>
470.lbm	<b>21.4</b>	<b>641</b>	21.0	654	22.4	613	<b>21.4</b>	<b>641</b>	21.0	654	22.4	613
481.wrf	134	83.2	137	81.3	<b>137</b>	<b>81.7</b>	134	83.2	137	81.3	<b>137</b>	<b>81.7</b>
482.sphinx3	313	62.3	318	61.4	<b>314</b>	<b>62.0</b>	<b>313</b>	<b>62.3</b>	<b>318</b>	<b>61.4</b>	<b>314</b>	<b>62.0</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS settings:

Snoop Mode set to Home Snoop

Virtualization Technology disabled

Execute Disable disabled

System Profile set to Custom

CPU Power Management set to Maximum Performance

Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6818

\$Rev: 6818 \$ \$Date::: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191

running on linux-fm7q Mon Sep 8 09:45:28 2014

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R730 (Intel Xeon E5-2698 v3,  
2.30 GHz)

**SPECfp2006 = 105**

**SPECfp\_base2006 = 98.4**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Sep-2014

**Hardware Availability:** Sep-2014

**Software Availability:** Sep-2014

## Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2698 v3 @ 2.30GHz
        2 "physical id"s (chips)
        64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 16
    siblings   : 32
    physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
    physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
    cache size : 40960 KB
```

```
From /proc/meminfo
    MemTotal:       264441052 kB
    HugePages_Total:      0
    Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 11 (x86_64)
```

```
From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 3
```

```
uname -a:
Linux linux-fm7q 3.0.76-0.11-default #1 SMP Fri Jun 14 08:21:43 UTC 2013
(ccab990) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Sep 8 04:16 last=S
```

```
SPEC is set to: /root/cpu2006-1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        ext3  228G   11G  216G   5%  /
```

Additional information from dmidecode:

```
BIOS Dell Inc. 1.0.4 08/28/2014
Memory:
4x 00AD00B300AD HMA42GR7MFR4N-TFTD 16 GB 2133 MHz
6x 00AD063200AD HMA42GR7MFR4N-TFT1 16 GB 2133 MHz
6x 00CE00B300CE M393A2G40DB0-CPB 16 GB 2133 MHz
8x Not Specified Not Specified
```

(End of data from sysinfo program)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R730 (Intel Xeon E5-2698 v3,  
2.30 GHz)

**SPECfp2006 =**

**105**

**SPECfp\_base2006 =**

**98.4**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Sep-2014

**Hardware Availability:** Sep-2014

**Software Availability:** Sep-2014

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"  
OMP\_NUM\_THREADS = "32"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB  
memory using RedHat EL 6.4  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R730 (Intel Xeon E5-2698 v3,  
2.30 GHz)

**SPECfp2006 = 105**

**SPECfp\_base2006 = 98.4**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Sep-2014

**Hardware Availability:** Sep-2014

**Software Availability:** Sep-2014

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch  
-ansi-alias
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch  
-ansi-alias
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
433.milc: basepeak = yes
```

```
470.lbm: basepeak = yes
```

```
482.sphinx3: basepeak = yes
```

C++ benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R730 (Intel Xeon E5-2698 v3,  
2.30 GHz)

**SPECfp2006 =**

**105**

**SPECfp\_base2006 =**

**98.4**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:**

Sep-2014

**Hardware Availability:** Sep-2014

**Software Availability:** Sep-2014

## Peak Optimization Flags (Continued)

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll14  
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll12  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll12  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-inline-calloc -opt-malloc-options=3 -auto -unroll14

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.html>  
<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.xml>  
<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R730 (Intel Xeon E5-2698 v3,  
2.30 GHz)

**SPECfp2006 =** 105

**SPECfp\_base2006 =** 98.4

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Sep-2014

**Hardware Availability:** Sep-2014

**Software Availability:** Sep-2014

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Oct 8 19:40:39 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 8 October 2014.