



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp[®]_rate2006 = 4470

IBM Power E880 (4.35 GHz, 64 core)

SPECfp_rate_base2006 = 3960

CPU2006 license: 11


Test date: Sep-2014

Test sponsor: IBM Corporation

Hardware Availability: Nov-2014

Tested by: IBM Corporation

Software Availability: Nov-2014

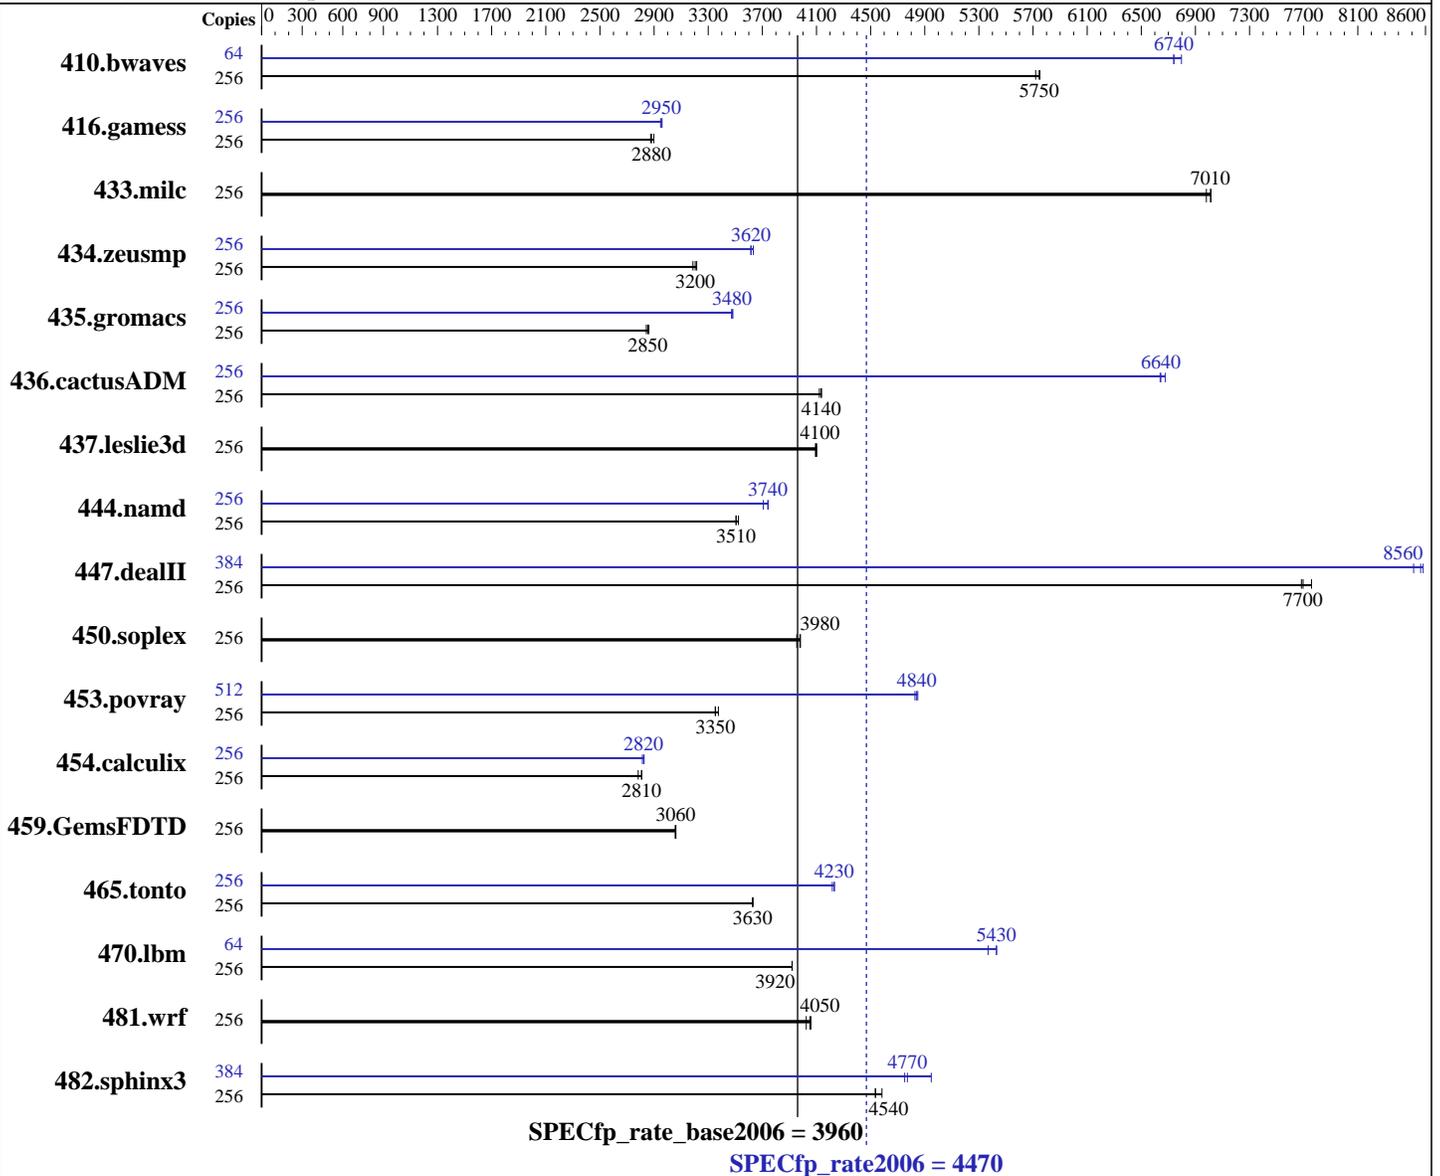

Hardware

CPU Name: POWER8
 CPU Characteristics: Intelligent Energy Optimization enabled, up to 4.53 GHz
 CPU MHz: 4359
 FPU: Integrated
 CPU(s) enabled: 64 cores, 8 chips, 8 cores/chip, 8 threads/core
 CPU(s) orderable: 4,8 Modules
 Primary Cache: 32 KB I + 64 KB D on chip per core

Software

Operating System: IBM AIX V7.1
 Compiler: C/C++: Version 13.1 of IBM XL C/C++ for AIX
 Fortran: Version 15.1 of IBM XL Fortran for AIX
 Auto Parallel: No
 File System: AIX/JFS2
 System State: Multi-user
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 4470

IBM Power E880 (4.35 GHz, 64 core)

SPECfp_rate_base2006 = 3960

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Sep-2014

Hardware Availability: Nov-2014

Software Availability: Nov-2014

Secondary Cache: 512 KB I+D on chip per core
 L3 Cache: 8 MB I+D on chip per core
 Other Cache: 16 MB I+D off chip per CDIMM
 Memory: 2 TB (64 x 32 GB CDIMMs) DDR3 1600 MHz
 Disk Subsystem: 7 x 300 GB 15K RPM SAS SF-2 Raid5
 Other Hardware: None

Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	256	605	5750	608	5720	606	5750	64	129	6740	128	6800	129	6740
416.gamess	256	1730	2900	1744	2870	1740	2880	256	1694	2960	1700	2950	1696	2950
433.milc	256	335	7010	335	7010	337	6980	256	335	7010	335	7010	337	6980
434.zeusmp	256	725	3210	727	3200	731	3190	256	641	3630	644	3620	644	3610
435.gromacs	256	639	2860	643	2840	641	2850	256	525	3480	526	3470	526	3480
436.cactusADM	256	740	4140	740	4140	742	4120	256	458	6680	460	6640	461	6640
437.leslie3d	256	587	4100	588	4090	587	4100	256	587	4100	588	4090	587	4100
444.namd	256	586	3510	586	3510	583	3520	256	549	3740	549	3740	554	3710
447.dealII	256	381	7700	381	7680	378	7760	384	512	8580	513	8560	516	8510
450.soplex	256	540	3950	536	3980	537	3980	256	540	3950	536	3980	537	3980
453.povray	256	406	3350	404	3370	406	3350	512	563	4840	564	4830	562	4850
454.calculix	256	759	2780	752	2810	752	2810	256	747	2830	751	2810	748	2820
459.GemsFDTD	256	889	3060	888	3060	887	3060	256	889	3060	888	3060	887	3060
465.tonto	256	694	3630	694	3630	694	3630	256	597	4220	595	4230	595	4230
470.lbm	256	897	3920	897	3920	897	3920	64	162	5430	164	5370	162	5430
481.wrf	256	706	4050	705	4060	711	4020	256	706	4050	705	4060	711	4020
482.sphinx3	256	1088	4580	1100	4540	1100	4540	384	1575	4750	1513	4950	1568	4770

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

C/C++ compiler updated to September 2014 PTF
 Version 13.01.0000.0001
 Fortran compiler updated to September 2014 PTF
 Version 15.01.0000.0001

Peak Tuning Notes

410.bwaves fdpr options: -O4 -m power8 -A 2 -rcl 2 -sls -dir -vrox
 416.gamess fdpr options: -O4 -m power8 -A 2 -rcl 2 -sls -dir -vrox
 433.milc fdpr options: -O4 -m power8 -A 2 -rcl 2 -sls -dir -vrox
 434.zeusmp fdpr options: -O4 -m power8 -A 2 -rcl 2 -sls -dir -vrox
 435.gromacs fdpr options: -O4 -m power8 -A 2 -rcl 2 -sls -dir -vrox
 436.cactusADM fdpr options: -O4 -m power8 -A 2 -rcl 2 -sls -dir -vrox

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 4470

IBM Power E880 (4.35 GHz, 64 core)

SPECfp_rate_base2006 = 3960

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Sep-2014

Hardware Availability: Nov-2014

Software Availability: Nov-2014

Peak Tuning Notes (Continued)

437.leslie3d fdpr options: -O4 -m power8 -A 2 -rcl 2 -sls -dir -vrox
444.namd fdpr options: -O4 -m power8 -A 2 -rcl 2 -sls -dir -vrox
447.dealII fdpr options: -O4 -m power8 -A 2 -rcl 2 -sls -dir -vrox
453.povray fdpr options: -O4 -m power8 -A 2 -rcl 2 -sls -dir -vrox
454.calculix fdpr options: -O4 -m power8 -A 2 -rcl 2 -sls -dir -vrox
459.GemsFDTD fdpr options: -O4 -m power8 -A 2 -rcl 2 -sls -dir -vrox
465.tonto fdpr options: -O4 -m power8 -A 2 -rcl 2 -sls -dir -vrox
470.lbm fdpr options: -O4 -m power8 -A 2 -rcl 2 -sls -dir -vrox
481.wrf fdpr options: -O4 -m power8 -A 2 -rcl 2 -sls -dir -vrox
482.sphinx3 fdpr options: -O4 -m power8 -A 2 -rcl 2 -sls -dir -vrox

Submit Notes

The config file option 'submit' was used
to assign benchmark copy to specific kernel thread using
the "bindprocessor" command (see flags file for details).

Operating System Notes

AIX updated to V7.1 TL3 SP4

All ulimits set to unlimited.
Set 8 threads per core via "smtctl -t 8 -w boot"

51200 16M large pages defined with vmo command

General Notes

Environment variables set by runspec before the start of the run:
MALLOCOPTIONS = "pool"
MEMORY_AFFINITY = "MCM"
XLFRTEOPTS = "intrinthds=1"

Base Compiler Invocation

C benchmarks:
/opt/IBM/xlc/13.1.0/bin/xlc -qlanglvl=extc99

C++ benchmarks:
/opt/IBM/xlc/13.1.0/bin/xlc

Fortran benchmarks:
/opt/IBM/xlf/15.1.0/bin/xlf95

Benchmarks using both Fortran and C:
/opt/IBM/xlc/13.1.0/bin/xlc -qlanglvl=extc99
/opt/IBM/xlf/15.1.0/bin/xlf95



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 4470

IBM Power E880 (4.35 GHz, 64 core)

SPECfp_rate_base2006 = 3960

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Sep-2014

Hardware Availability: Nov-2014

Software Availability: Nov-2014

Base Portability Flags

```
410.bwaves: -qfixed
416.gamess: -qfixed
434.zeusmp: -qfixed
435.gromacs: -qfixed -qextname
436.cactusADM: -qfixed -qextname
437.leslie3d: -qfixed
454.calculix: -qfixed -qextname
481.wrf: -DSPEC_CPU_AIX -DNOUNDERSCORE
482.sphinx3: -qchars=signed
```

Base Optimization Flags

C benchmarks:

```
-qinline=40 -qipa=threads -bmaxdata:0x40000000 -qlargepage -O5
-qsimd=noauto -D_ILS_MACROS -blpdata
```

C++ benchmarks:

```
-qinline=40 -qipa=threads -bmaxdata:0x50000000 -qlargepage -O5
-qvecnv1 -D_ILS_MACROS -qrtti=all -D__IBM_FAST_VECTOR
-D__IBM_FAST_SET_MAP_ITERATOR -blpdata
```

Fortran benchmarks:

```
-qipa=threads -bmaxdata:0x60000000 -qlargepage -O5 -qvecnv1
-qsmallstack=dynlenonheap -qalias=nostd -blpdata
```

Benchmarks using both Fortran and C:

```
-qinline=40 -qipa=threads -bmaxdata:0x60000000 -qlargepage -O5
-qsimd=noauto -D_ILS_MACROS -qvecnv1 -qsmallstack=dynlenonheap
-qalias=nostd -blpdata
```

Base Other Flags

C benchmarks:

```
-qipa=noobject -qsuppress=1500-036
```

C++ benchmarks:

```
-qipa=noobject -qsuppress=1500-036
```

Fortran benchmarks:

```
-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg
-qsuppress=1500-036
```

Benchmarks using both Fortran and C:

```
-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg
-qsuppress=1500-036
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 4470

IBM Power E880 (4.35 GHz, 64 core)

SPECfp_rate_base2006 = 3960

CPU2006 license: 11

Test date: Sep-2014

Test sponsor: IBM Corporation

Hardware Availability: Nov-2014

Tested by: IBM Corporation

Software Availability: Nov-2014

Peak Compiler Invocation

C benchmarks:

/opt/IBM/xlc/13.1.0/bin/xlc -qlanglvl=extc99

C++ benchmarks:

/opt/IBM/xlC/13.1.0/bin/xlC

Fortran benchmarks:

/opt/IBM/xlf/15.1.0/bin/xlf95

Benchmarks using both Fortran and C:

/opt/IBM/xlc/13.1.0/bin/xlc -qlanglvl=extc99

/opt/IBM/xlf/15.1.0/bin/xlf95

Peak Portability Flags

410.bwaves: -qfixed
416.gamess: -qfixed
434.zeusmp: -qfixed
435.gromacs: -qfixed -qextname
436.cactusADM: -DSPEC_CPU_LP64 -qfixed -qextname
437.leslie3d: -qfixed
454.calculix: -qfixed -qextname
481.wrf: -DSPEC_CPU_AIX -DNOUNDERSCORE
482.sphinx3: -qchars=signed

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -qinline=40 -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2)
-qlargepage -O5 -qsimd=noauto -qprefetch=dscr=84
-D_ILS_MACROS -qfdpr -q64 -blpdata -btextpsize:64K

482.sphinx3: -qinline=40 -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2)
-qlargepage -O5 -qsimd=noauto -qprefetch=dscr=147
-D_ILS_MACROS -qfdpr -blpdata -btextpsize:64K

C++ benchmarks:

444.namd: -qinline=40 -qipa=threads -qlargepage -O4 -qvecnv1
-qfdpr -D_ILS_MACROS -D__IBM_FAST_VECTOR
-D__IBM_FAST_SET_MAP_ITERATOR -blpdata -btextpsize:64K

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 4470

IBM Power E880 (4.35 GHz, 64 core)

SPECfp_rate_base2006 = 3960

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Sep-2014

Hardware Availability: Nov-2014

Software Availability: Nov-2014

Peak Optimization Flags (Continued)

447.dealIII: -qinline=40 -qipa=threads -bmaxdata:0x50000000
-qpdf1(pass 1) -qpdf2(pass 2) -qlargepage -O4 -qvecnv1
-qfdpr -D_ILS_MACROS -qrtti=all -D__IBM_FAST_VECTOR
-D__IBM_FAST_SET_MAP_ITERATOR -blpdata -btextpsize:64K

450.soplex: basepeak = yes

453.povray: -qinline=40 -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2)
-qlargepage -O3 -qarch=auto -qtune=auto
-qprefetch=dscr=147 -D_ILS_MACROS -qalign=natural -qfdpr
-blpdata -btextpsize:64K

Fortran benchmarks:

410.bwaves: -qipa=threads -bmaxdata:0x50000000 -qlargepage -O5
-qsimd=noauto -qprefetch=dscr=84 -qfdpr
-qsmallstack=dynlenonheap -blpdata -btextpsize:64K

416.gamess: -qipa=threads -bmaxdata:0x40000000 -qlargepage -O5
-qsimd=noauto -qalias=nostd -qfdpr -blpdata
-btextpsize:64K

434.zeusmp: -qipa=threads -qlargepage -O4 -qsimd=noauto
-qxlf90=nosignedzero -qfdpr -q64 -blpdata -btextpsize:64K

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2) -qlargepage
-O5 -qvecnv1 -qprefetch=dscr=147 -qfdpr -q64 -blpdata
-btextpsize:64K

Benchmarks using both Fortran and C:

435.gromacs: -qinline=40 -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2)
-qlargepage -O4 -qvecnv1 -D_ILS_MACROS -qfdpr -blpdata
-btextpsize:64K

436.cactusADM: -qinline=40 -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2)
-qlargepage -O4 -qvecnv1 -qarch=pwr7 -qtune=pwr7 -q64
-D_ILS_MACROS -qfdpr -blpdata -btextpsize:64K

454.calculix: -qinline=40 -qipa=threads -O5 -qsimd=noauto
-qprefetch=dscr=147 -D_ILS_MACROS -qfdpr -blpdata
-btextpsize:64K

481.wrf: basepeak = yes



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 4470

IBM Power E880 (4.35 GHz, 64 core)

SPECfp_rate_base2006 = 3960

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Sep-2014

Hardware Availability: Nov-2014

Software Availability: Nov-2014

Peak Other Flags

C benchmarks:

-qipa=noobject -qsuppress=1500-036

C++ benchmarks:

-qipa=noobject -qsuppress=1500-036

Fortran benchmarks:

-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg
-qsuppress=1500-036

Benchmarks using both Fortran and C (except as noted below):

-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg
-qsuppress=1500-036

454.calculix: -qsuppress=1500-010 -qsuppress=cmpmsg -qsuppress=1500-036

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/IBM-XL.V13.html>

<http://www.spec.org/cpu2006/flags/IBM-AIX.V7.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/IBM-XL.V13.xml>

<http://www.spec.org/cpu2006/flags/IBM-AIX.V7.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Oct 21 15:48:17 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 21 October 2014.