



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B260 M4 (Intel Xeon E7-4850 v2, 2.30 GHz)

**SPECint®2006 = 46.0**

**SPECint\_base2006 = 42.6**

CPU2006 license: 9019


Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Oct-2014

Hardware Availability: May-2014

Software Availability: Sep-2013

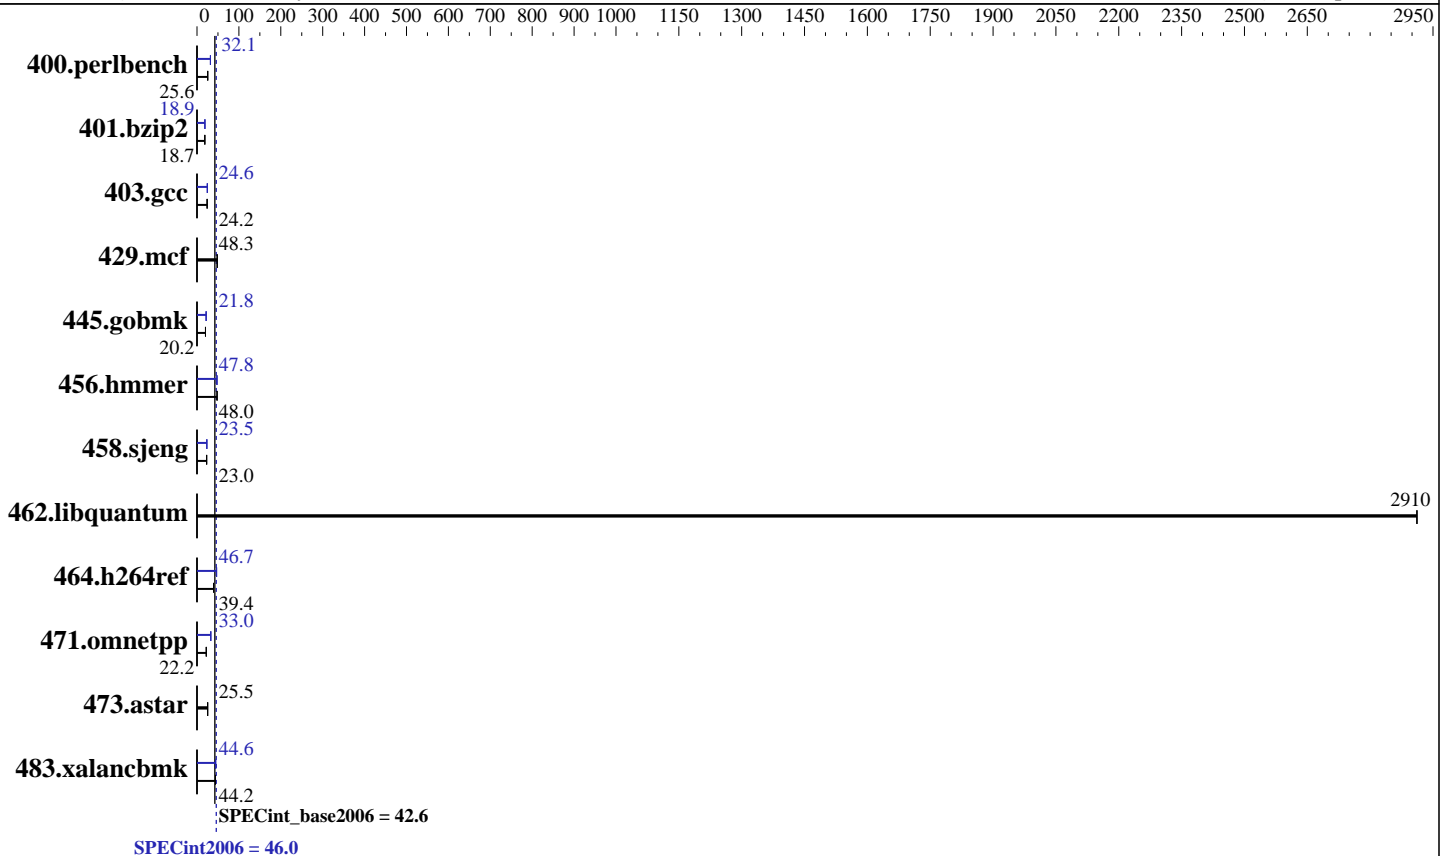

### Hardware

CPU Name: Intel Xeon E7-4850 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz  
 CPU MHz: 2300  
 FPU: Integrated  
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 24 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (32 x 8 GB 2Rx4 PC3L-12800R-11, ECC, running at 1066 MHz and CL11)  
 Disk Subsystem: 1 X 300 GB 15000 RPM SAS  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
 2.6.32-431.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B260 M4 (Intel Xeon E7-4850 v2, 2.30 GHz)

SPECint2006 = 46.0

SPECint\_base2006 = 42.6

CPU2006 license: 9019  
Test sponsor: Cisco Systems  
Tested by: Cisco Systems

Test date: Oct-2014  
Hardware Availability: May-2014  
Software Availability: Sep-2013

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	382	25.6	381	25.6	<b><u>382</u></b>	<b><u>25.6</u></b>	304	32.1	<b><u>305</u></b>	<b><u>32.1</u></b>	305	32.0
401.bzip2	517	18.7	517	18.7	<b><u>517</u></b>	<b><u>18.7</u></b>	512	18.8	<b><u>511</u></b>	<b><u>18.9</u></b>	511	18.9
403.gcc	333	24.2	333	24.2	<b><u>333</u></b>	<b><u>24.2</u></b>	<b><u>327</u></b>	<b><u>24.6</u></b>	327	24.6	327	24.6
429.mcf	<b><u>189</u></b>	<b><u>48.3</u></b>	188	48.4	190	48.0	<b><u>189</u></b>	<b><u>48.3</u></b>	188	48.4	190	48.0
445.gobmk	518	20.2	518	20.2	<b><u>518</u></b>	<b><u>20.2</u></b>	481	21.8	<b><u>480</u></b>	<b><u>21.8</u></b>	480	21.8
456.hammer	194	48.0	<b><u>194</u></b>	<b><u>48.0</u></b>	196	47.7	195	47.8	198	47.2	<b><u>195</u></b>	<b><u>47.8</u></b>
458.sjeng	526	23.0	<b><u>525</u></b>	<b><u>23.0</u></b>	525	23.0	515	23.5	<b><u>516</u></b>	<b><u>23.5</u></b>	516	23.4
462.libquantum	<b><u>7.12</u></b>	<b><u>2910</u></b>	7.12	2910	7.12	2910	<b><u>7.12</u></b>	<b><u>2910</u></b>	7.12	2910	7.12	2910
464.h264ref	561	39.4	<b><u>561</u></b>	<b><u>39.4</u></b>	561	39.4	473	46.7	474	46.7	<b><u>473</u></b>	<b><u>46.7</u></b>
471.omnetpp	283	22.1	281	22.2	<b><u>282</u></b>	<b><u>22.2</u></b>	189	33.0	<b><u>190</u></b>	<b><u>33.0</u></b>	191	32.8
473.astar	275	25.5	277	25.3	<b><u>275</u></b>	<b><u>25.5</u></b>	275	25.5	277	25.3	<b><u>275</u></b>	<b><u>25.5</u></b>
483.xalancbmk	156	44.1	156	44.2	<b><u>156</u></b>	<b><u>44.2</u></b>	<b><u>155</u></b>	<b><u>44.6</u></b>	155	44.6	155	44.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

```

Intel HT Technology = Enabled
CPU performance set to HPC
Power Technology set to Custom
CPU Power State C6 set to Disabled
CPU Power State C1 Enhanced set to Disabled
Memory RAS configuration set to Maximum Performance
DRAM Clock Throttling Set to Performance
Sysinfo program /opt/cpu2006-1.4/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on B460M4 Mon Oct 13 00:49:50 2014

```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E7-4850 v2 @ 2.30GHz
2 "physical id"s (chips)
48 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 12

```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B260 M4 (Intel Xeon E7-4850 v2, 2.30 GHz)

**SPECint2006 = 46.0**

**SPECint\_base2006 = 42.6**

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Oct-2014

**Hardware Availability:** May-2014

**Software Availability:** Sep-2013

### Platform Notes (Continued)

```

siblings      : 24
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
cache size   : 24576 KB

```

```

From /proc/meminfo
MemTotal:      263969496 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

```

```

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.5 (Santiago)

```

```

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

```

```

uname -a:
Linux B460M4 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013 x86_64
x86_64 x86_64 GNU/Linux

```

run-level 3 Oct 13 00:49

```

SPEC is set to: /opt/cpu2006-1.4
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdal       ext4  275G   55G  206G  21% /

```

```

Additional information from dmidecode:
BIOS Cisco Systems, Inc. EXM4-1.2.2.2.0.042820141805 04/28/2014
Memory:
32x 8 GB
32x 0xCE00 M393B1K70QB0-YK0 8 GB 1066 MHz 2 rank
16x NO DIMM NO DIMM

```

(End of data from sysinfo program)

### General Notes

Environment variables set by runspec before the start of the run:

```

KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/opt/cpu2006-1.4/libs/32:/opt/cpu2006-1.4/libs/64:/opt/cpu2006-1.4/sh"
OMP_NUM_THREADS = "24"

```

```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RedHat EL 6.4
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

```



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B260 M4 (Intel Xeon E7-4850 v2, 2.30 GHz)

SPECint2006 = 46.0

SPECint\_base2006 = 42.6

CPU2006 license: 9019  
Test sponsor: Cisco Systems  
Tested by: Cisco Systems

Test date: Oct-2014  
Hardware Availability: May-2014  
Software Availability: Sep-2013

## Base Compiler Invocation

C benchmarks:  
icc -m64  
  
C++ benchmarks:  
icpc -m64

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
471.omnetpp: -DSPEC\_CPU\_LP64  
473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32  
  
C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-Wl,-z,muldefs -L/sh -lsmartheap64

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B260 M4 (Intel Xeon E7-4850 v2, 2.30 GHz)

SPECint2006 = 46.0

SPECint\_base2006 = 42.6

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Oct-2014

Hardware Availability: May-2014

Software Availability: Sep-2013

## Peak Compiler Invocation (Continued)

400.perlbench: `icc -m32`

445.gobmk: `icc -m32`

464.h264ref: `icc -m32`

C++ benchmarks (except as noted below):

`icpc -m32`

473.astar: `icpc -m64`

## Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`

401.bzip2: `-DSPEC_CPU_LP64`

403.gcc: `-DSPEC_CPU_LP64`

429.mcf: `-DSPEC_CPU_LP64`

456.hmmer: `-DSPEC_CPU_LP64`

458.sjeng: `-DSPEC_CPU_LP64`

462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`

473.astar: `-DSPEC_CPU_LP64`

483.xalancbmk: `-DSPEC_CPU_LINUX`

## Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch -ansi-alias`

401.bzip2: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32 -opt-prefetch -ansi-alias`

403.gcc: `-xSSE4.2 -ipo -O3 -no-prec-div -inline-calloc -opt-malloc-options=3 -auto-ilp32`

429.mcf: `basepeak = yes`

445.gobmk: `-xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -ansi-alias`

456.hmmer: `-xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32 -ansi-alias`

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B260 M4 (Intel Xeon E7-4850 v2, 2.30 GHz)

**SPECint2006 = 46.0**

**SPECint\_base2006 = 42.6**

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Oct-2014

**Hardware Availability:** May-2014

**Software Availability:** Sep-2013

## Peak Optimization Flags (Continued)

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-ra-region-strategy=block -ansi-alias  
-Wl,-z,muldefs -L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias  
-Wl,-z,muldefs -L/sh -lsmartheap

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revB.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Nov 6 13:35:29 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 5 November 2014.