



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 5018GR-T  
(X10SRG-F , Intel Xeon E5-2697 v3)

SPECfp®2006 = 104

SPECfp\_base2006 = 99.9

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Sep-2014

Hardware Availability: Sep-2014

Software Availability: Nov-2013

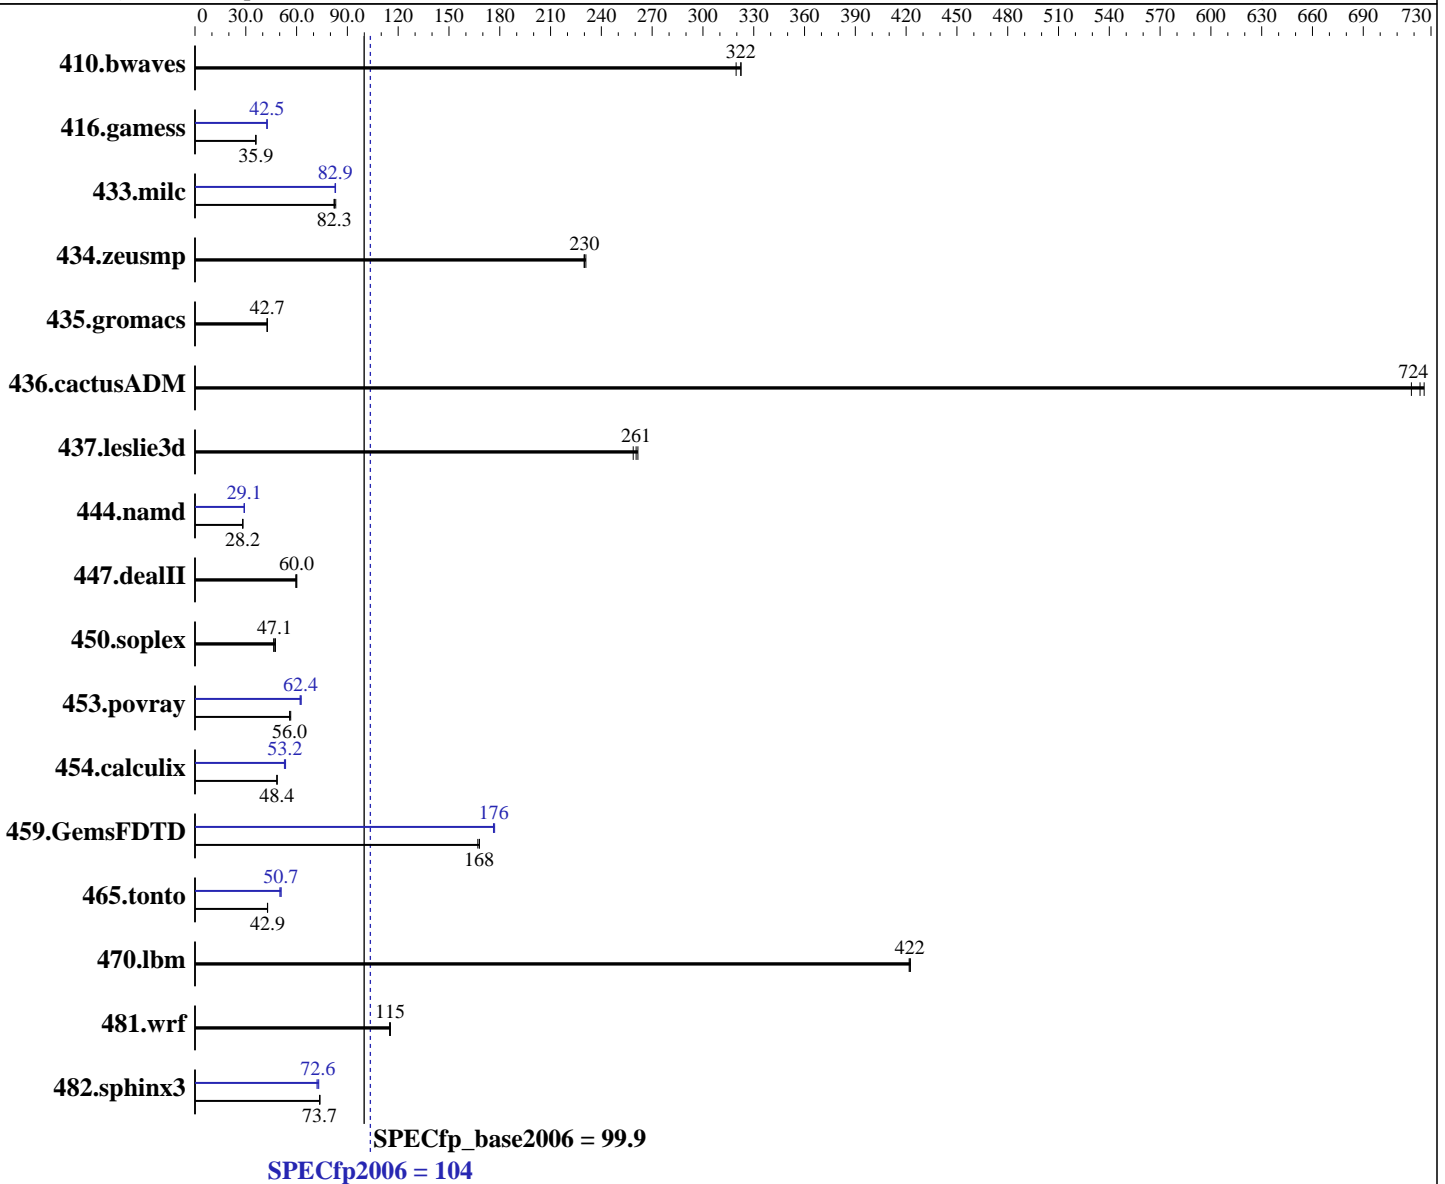

### Hardware

CPU Name: Intel Xeon E5-2697 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 14 cores, 1 chip, 14 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.5,  
Kernel 2.6.32-431.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE  
for Linux;  
Fortran: Version 14.0.0.080 of Intel Fortran  
Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 5018GR-T  
(X10SRG-F , Intel Xeon E5-2697 v3)

SPECfp2006 = **104**

SPECfp\_base2006 = **99.9**

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Sep-2014

Hardware Availability: Sep-2014

Software Availability: Nov-2013

L3 Cache: 35 MB I+D on chip per chip  
Other Cache: None  
Memory: 128 GB (8 x 16 GB 2Rx4 PC4-2133P-R)  
Disk Subsystem: 1 x 2000 GB SATA II, 7200 RPM  
Other Hardware: None

Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	42.1	323	42.5	320	<b><u>42.2</u></b>	<b><u>322</u></b>	42.1	323	42.5	320	<b><u>42.2</u></b>	<b><u>322</u></b>
416.gamess	546	35.9	544	36.0	<b><u>545</u></b>	<b><u>35.9</u></b>	461	42.5	<b><u>461</u></b>	<b><u>42.5</u></b>	459	42.6
433.milc	<b><u>111</u></b>	<b><u>82.3</u></b>	110	83.1	112	82.1	111	82.7	<b><u>111</u></b>	<b><u>82.9</u></b>	111	83.0
434.zeusmp	<b><u>39.6</u></b>	<b><u>230</u></b>	39.4	231	39.6	230	<b><u>39.6</u></b>	<b><u>230</u></b>	39.4	231	39.6	230
435.gromacs	167	42.7	<b><u>167</u></b>	<b><u>42.7</u></b>	167	42.7	167	42.7	<b><u>167</u></b>	<b><u>42.7</u></b>	167	42.7
436.cactusADM	16.6	718	<b><u>16.5</u></b>	<b><u>724</u></b>	16.5	726	16.6	718	<b><u>16.5</u></b>	<b><u>724</u></b>	16.5	726
437.leslie3d	35.9	262	36.3	259	<b><u>36.1</u></b>	<b><u>261</u></b>	35.9	262	36.3	259	<b><u>36.1</u></b>	<b><u>261</u></b>
444.namd	284	28.2	<b><u>284</u></b>	<b><u>28.2</u></b>	284	28.2	275	29.2	276	29.1	<b><u>275</u></b>	<b><u>29.1</u></b>
447.dealII	192	59.5	190	60.1	<b><u>191</u></b>	<b><u>60.0</u></b>	192	59.5	190	60.1	<b><u>191</u></b>	<b><u>60.0</u></b>
450.soplex	<b><u>177</u></b>	<b><u>47.1</u></b>	180	46.4	176	47.5	<b><u>177</u></b>	<b><u>47.1</u></b>	180	46.4	176	47.5
453.povray	94.1	56.5	95.1	56.0	<b><u>95.1</u></b>	<b><u>56.0</u></b>	<b><u>85.2</u></b>	<b><u>62.4</u></b>	84.8	62.7	85.7	62.1
454.calculix	170	48.4	<b><u>170</u></b>	<b><u>48.4</u></b>	170	48.4	156	52.8	154	53.5	<b><u>155</u></b>	<b><u>53.2</u></b>
459.GemsFDTD	63.2	168	63.5	167	<b><u>63.2</u></b>	<b><u>168</u></b>	60.2	176	<b><u>60.1</u></b>	<b><u>176</u></b>	60.0	177
465.tonto	230	42.9	<b><u>230</u></b>	<b><u>42.9</u></b>	230	42.8	196	50.1	<b><u>194</u></b>	<b><u>50.7</u></b>	194	50.8
470.lbm	32.5	423	<b><u>32.5</u></b>	<b><u>422</u></b>	32.6	422	32.5	423	<b><u>32.5</u></b>	<b><u>422</u></b>	32.6	422
481.wrf	96.8	115	97.2	115	<b><u>97.0</u></b>	<b><u>115</u></b>	96.8	115	97.2	115	<b><u>97.0</u></b>	<b><u>115</u></b>
482.sphinx3	265	73.6	<b><u>264</u></b>	<b><u>73.7</u></b>	264	73.7	267	73.1	<b><u>268</u></b>	<b><u>72.6</u></b>	270	72.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:  
Early Snoop = Disabled  
Enforce POR = Disabled  
Hyper-Threading (ALL) = Disabled  
Memory Frequency = 2133



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 5018GR-T  
(X10SRG-F , Intel Xeon E5-2697 v3)

SPECfp2006 = 104

SPECfp\_base2006 = 99.9

**CPU2006 license:** 001176  
**Test sponsor:** Supermicro  
**Tested by:** Supermicro

**Test date:** Sep-2014  
**Hardware Availability:** Sep-2014  
**Software Availability:** Nov-2013

## General Notes

Environment variables set by runspec before the start of the run:  
KMP\_AFFINITY = "granularity=fine,compact,1,0"  
LD\_LIBRARY\_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64:/usr/cpu2006/sh"  
OMP\_NUM\_THREADS = "14"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB  
memory using RedHat EL 6.4  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.deallI: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 5018GR-T  
(X10SRG-F , Intel Xeon E5-2697 v3)

**SPECfp2006 = 104**

**SPECfp\_base2006 = 99.9**

**CPU2006 license:** 001176  
**Test sponsor:** Supermicro  
**Tested by:** Supermicro

**Test date:** Sep-2014  
**Hardware Availability:** Sep-2014  
**Software Availability:** Nov-2013

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch  
-ansi-alias

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch  
-ansi-alias

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32 -ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
-parallel

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 5018GR-T  
(X10SRG-F , Intel Xeon E5-2697 v3)

SPECfp2006 = 104

SPECfp\_base2006 = 99.9

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Sep-2014

Hardware Availability: Sep-2014

Software Availability: Nov-2013

## Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revE.html>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 5018GR-T  
(X10SRG-F , Intel Xeon E5-2697 v3)

**SPECfp2006 = 104**

**SPECfp\_base2006 = 99.9**

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Sep-2014

**Hardware Availability:** Sep-2014

**Software Availability:** Nov-2013

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revE.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Wed Nov 12 10:17:34 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 7 November 2014.