



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp®2006 = 77.6

PowerEdge R220 (Intel Xeon E3-1271 v3, 3.60 GHz)

SPECfp\_base2006 = 75.9

CPU2006 license: 55


Test date: Oct-2014

Test sponsor: Dell Inc.

Hardware Availability: Mar-2014

Tested by: Dell Inc.

Software Availability: Sep-2014

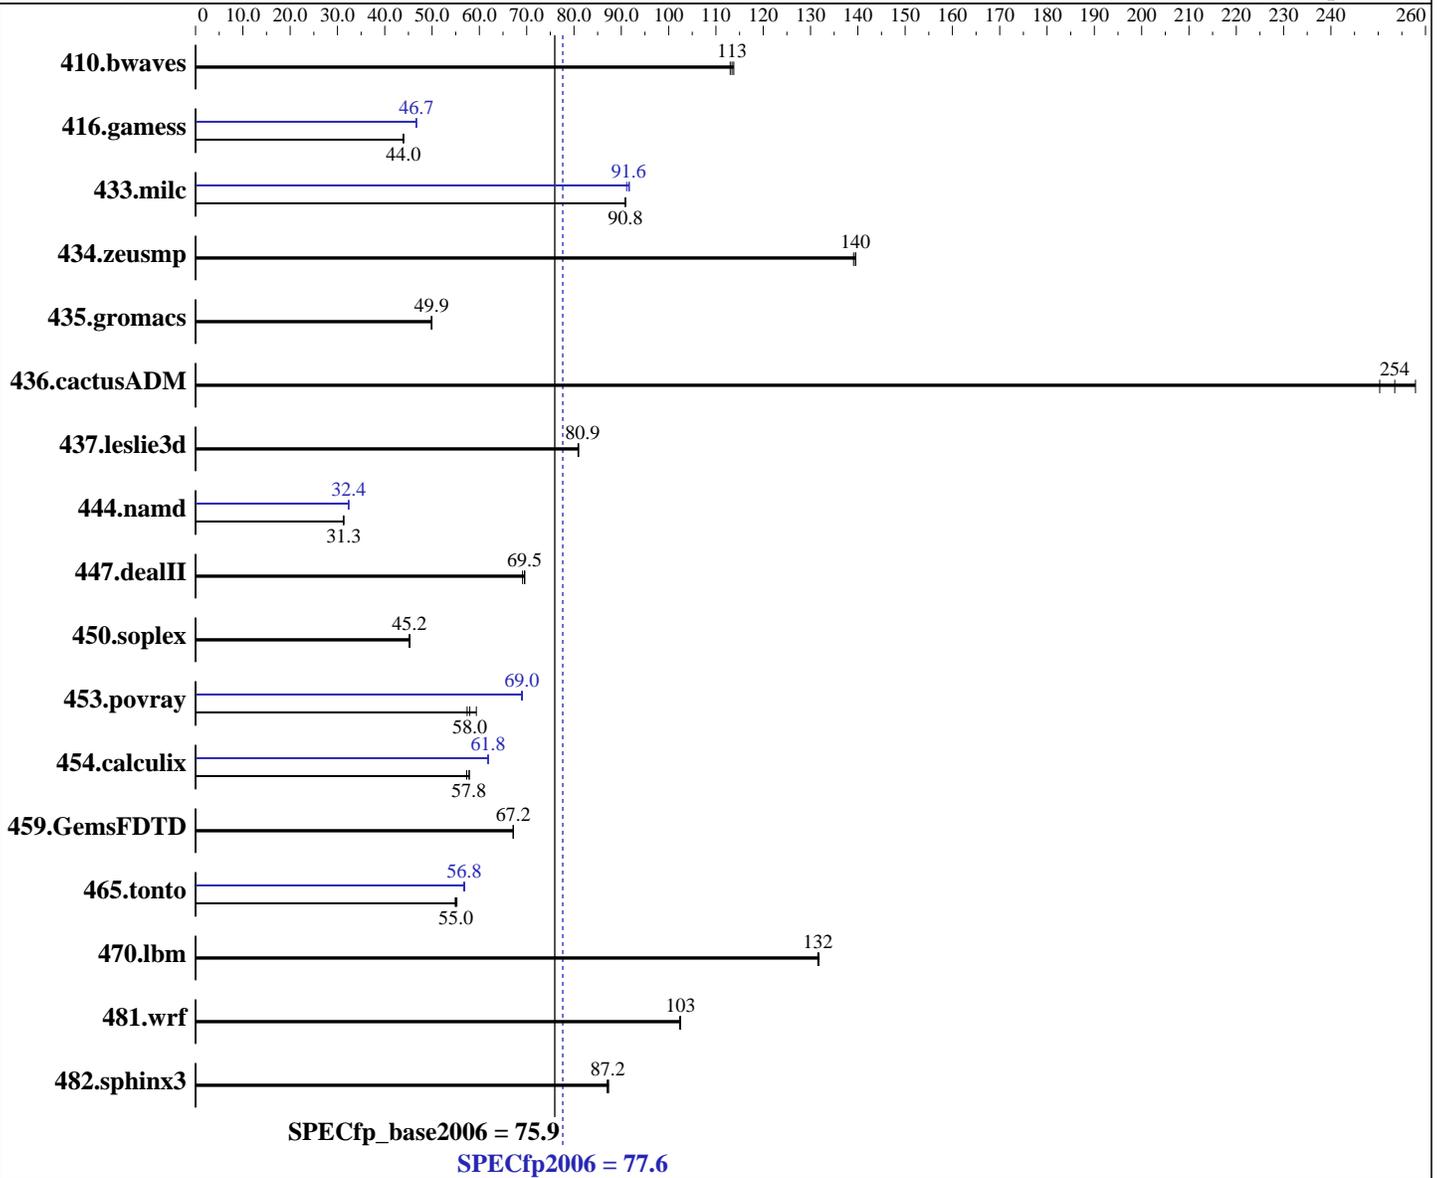

SPECfp\_base2006 = 75.9  
SPECfp2006 = 77.6

### Hardware

CPU Name: Intel Xeon E3-1271 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 4.00 GHz  
 CPU MHz: 3600  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64)  
 3.0.76-0.11-default  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext2  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 77.6

PowerEdge R220 (Intel Xeon E3-1271 v3, 3.60 GHz)

SPECfp\_base2006 = 75.9

CPU2006 license: 55

Test date: Oct-2014

Test sponsor: Dell Inc.

Hardware Availability: Mar-2014

Tested by: Dell Inc.

Software Availability: Sep-2014

L3 Cache: 8 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 32 GB (4 x 8 GB 2Rx8 PC3L-12800E-11)  
 Disk Subsystem: 1 x 300 GB 15000 RPM SAS  
 Other Hardware: None

Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	<b><u>120</u></b>	<b><u>113</u></b>	119	114	120	113	<b><u>120</u></b>	<b><u>113</u></b>	119	114	120	113
416.gamess	<b><u>445</u></b>	<b><u>44.0</u></b>	446	43.9	445	44.0	<b><u>419</u></b>	<b><u>46.7</u></b>	419	46.7	420	46.7
433.milc	<b><u>101</u></b>	<b><u>90.8</u></b>	101	90.9	101	90.8	101	91.1	100	91.7	<b><u>100</u></b>	<b><u>91.6</u></b>
434.zeusmp	65.2	140	65.4	139	<b><u>65.2</u></b>	<b><u>140</u></b>	65.2	140	65.4	139	<b><u>65.2</u></b>	<b><u>140</u></b>
435.gromacs	143	49.8	143	50.0	<b><u>143</u></b>	<b><u>49.9</u></b>	143	49.8	143	50.0	<b><u>143</u></b>	<b><u>49.9</u></b>
436.cactusADM	<b><u>47.1</u></b>	<b><u>254</u></b>	46.3	258	47.7	250	<b><u>47.1</u></b>	<b><u>254</u></b>	46.3	258	47.7	250
437.leslie3d	<b><u>116</u></b>	<b><u>80.9</u></b>	116	80.9	116	81.0	<b><u>116</u></b>	<b><u>80.9</u></b>	116	80.9	116	81.0
444.namd	<b><u>256</u></b>	<b><u>31.3</u></b>	257	31.2	256	31.3	<b><u>248</u></b>	<b><u>32.4</u></b>	248	32.4	248	32.4
447.dealII	164	69.6	<b><u>165</u></b>	<b><u>69.5</u></b>	166	69.1	164	69.6	<b><u>165</u></b>	<b><u>69.5</u></b>	166	69.1
450.soplex	185	45.1	184	45.3	<b><u>184</u></b>	<b><u>45.2</u></b>	185	45.1	184	45.3	<b><u>184</u></b>	<b><u>45.2</u></b>
453.povray	89.6	59.4	92.7	57.4	<b><u>91.8</u></b>	<b><u>58.0</u></b>	77.0	69.1	77.2	68.9	<b><u>77.1</u></b>	<b><u>69.0</u></b>
454.calculix	143	57.9	<b><u>143</u></b>	<b><u>57.8</u></b>	144	57.3	<b><u>133</u></b>	<b><u>61.8</u></b>	133	61.8	133	61.9
459.GemsFDTD	<b><u>158</u></b>	<b><u>67.2</u></b>	158	67.2	158	67.2	<b><u>158</u></b>	<b><u>67.2</u></b>	158	67.2	158	67.2
465.tonto	178	55.3	179	54.9	<b><u>179</u></b>	<b><u>55.0</u></b>	173	56.9	174	56.7	<b><u>173</u></b>	<b><u>56.8</u></b>
470.lbm	104	132	<b><u>104</u></b>	<b><u>132</u></b>	104	132	104	132	<b><u>104</u></b>	<b><u>132</u></b>	104	132
481.wrf	109	103	109	102	<b><u>109</u></b>	<b><u>103</u></b>	109	103	109	102	<b><u>109</u></b>	<b><u>103</u></b>
482.sphinx3	223	87.3	<b><u>224</u></b>	<b><u>87.2</u></b>	224	87.0	223	87.3	<b><u>224</u></b>	<b><u>87.2</u></b>	224	87.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Configuration:  
 Virtualization Technology disabled  
 Execute Disable disabled  
 System Profile set to Performance  
 Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6818  
 \$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
 running on linux Mon Oct 6 10:31:32 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 77.6

PowerEdge R220 (Intel Xeon E3-1271 v3, 3.60 GHz)

SPECfp\_base2006 = 75.9

CPU2006 license: 55

Test date: Oct-2014

Test sponsor: Dell Inc.

Hardware Availability: Mar-2014

Tested by: Dell Inc.

Software Availability: Sep-2014

## Platform Notes (Continued)

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) CPU E3-1271 v3 @ 3.60GHz
1 "physical id"s (chips)
4 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 4
siblings : 4
physical 0: cores 0 1 2 3
cache size : 8192 KB
```

From /proc/meminfo

```
MemTotal: 32809896 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

/usr/bin/lsb\_release -d

```
SUSE Linux Enterprise Server 11 (x86_64)
```

From /etc/\*release\* /etc/\*version\*

```
SuSE-release:
SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 3
```

uname -a:

```
Linux linux 3.0.76-0.11-default #1 SMP Fri Jun 14 08:21:43 UTC 2013 (ccab990)
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Oct 6 10:22 last=S

SPEC is set to: /root/cpu2006-1.2

```
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda2 ext2 267G 7.7G 258G 3% /
```

Additional information from dmidecode:

BIOS Dell Inc. 1.3.2 09/11/2014

Memory:

4x Hynix/Hyundai HMT41GU7AFR8A-PB 8 GB 1600 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"
OMP_NUM_THREADS = "4"
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 77.6

PowerEdge R220 (Intel Xeon E3-1271 v3, 3.60 GHz)

SPECfp\_base2006 = 75.9

CPU2006 license: 55

Test date: Oct-2014

Test sponsor: Dell Inc.

Hardware Availability: Mar-2014

Tested by: Dell Inc.

Software Availability: Sep-2014

## General Notes (Continued)

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/transparent\_hugepage/enabled  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch  
-ansi-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 77.6

PowerEdge R220 (Intel Xeon E3-1271 v3, 3.60 GHz)

SPECfp\_base2006 = 75.9

CPU2006 license: 55

Test date: Oct-2014

Test sponsor: Dell Inc.

Hardware Availability: Mar-2014

Tested by: Dell Inc.

Software Availability: Sep-2014

## Base Optimization Flags (Continued)

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch  
-ansi-alias

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32 -ansi-alias

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 77.6

PowerEdge R220 (Intel Xeon E3-1271 v3, 3.60 GHz)

SPECfp\_base2006 = 75.9

CPU2006 license: 55

Test date: Oct-2014

Test sponsor: Dell Inc.

Hardware Availability: Mar-2014

Tested by: Dell Inc.

Software Availability: Sep-2014

## Peak Optimization Flags (Continued)

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
-ansi-alias

### Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-inline-alloc -opt-malloc-options=3 -auto -unroll4

### Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.html>  
<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.xml>  
<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 77.6

PowerEdge R220 (Intel Xeon E3-1271 v3, 3.60 GHz)

SPECfp\_base2006 = 75.9

CPU2006 license: 55

Test date: Oct-2014

Test sponsor: Dell Inc.

Hardware Availability: Mar-2014

Tested by: Dell Inc.

Software Availability: Sep-2014

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Wed Nov 5 10:23:42 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 4 November 2014.