



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp[®]_rate2006 = 2900

Huawei RH8100 V3 (Intel Xeon E7-8891 v2)

SPECfp_rate_base2006 = 2820

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Oct-2014

Hardware Availability: Feb-2014

Software Availability: Nov-2013

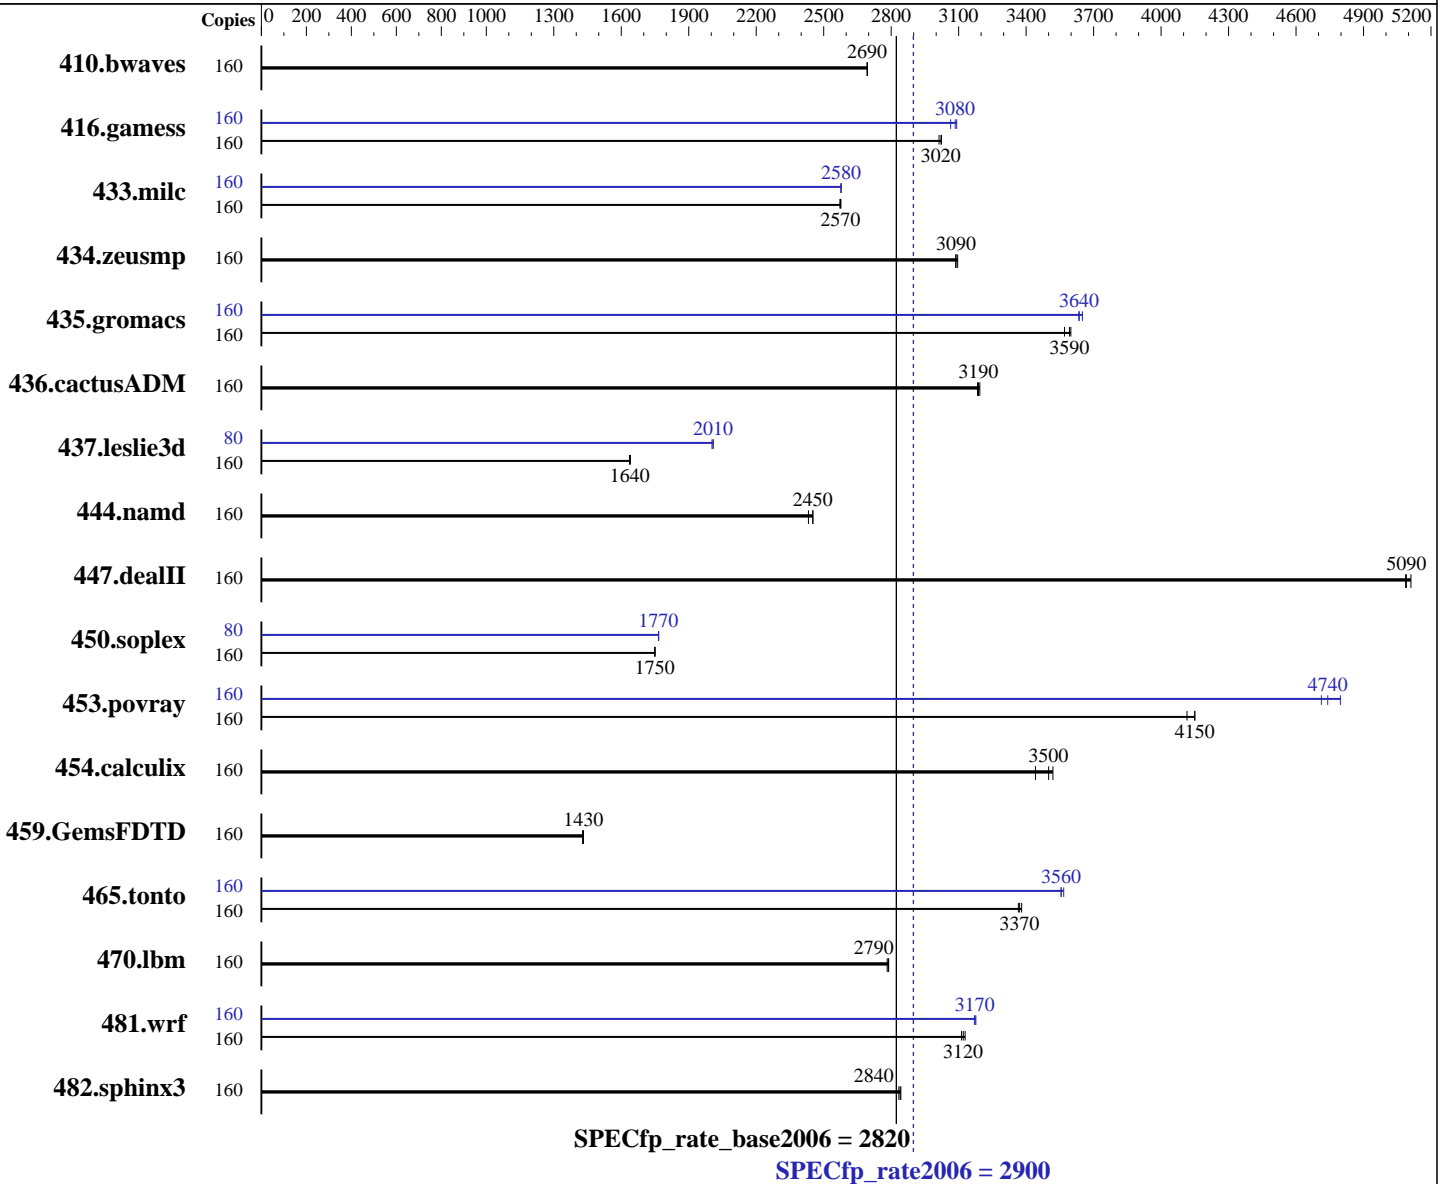

Hardware

CPU Name: Intel Xeon E7-8891 v2
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz
 CPU MHz: 3200
 FPU: Integrated
 CPU(s) enabled: 80 cores, 8 chips, 10 cores/chip, 2 threads/core
 CPU(s) orderable: 4,8 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)
 2.6.32-431.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 2900

Huawei RH8100 V3 (Intel Xeon E7-8891 v2)

SPECfp_rate_base2006 = 2820

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Oct-2014

Hardware Availability: Feb-2014

Software Availability: Nov-2013

L3 Cache: 37.5 MB I+D on chip per chip
 Other Cache: None
 Memory: 1 TB (128 x 8 GB 2Rx8 PC3-12800R-11, ECC, running at 1333 MHz and CL9)
 Disk Subsystem: 2 x 300 GB SAS, 10K RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	160	807	2690	807	2690	807	2690	160	807	2690	807	2690	807	2690
416.gamess	160	1040	3010	1037	3020	1036	3020	160	1013	3090	1022	3060	1016	3080
433.milc	160	571	2570	570	2580	571	2570	160	570	2580	570	2580	570	2580
434.zeusmp	160	472	3090	471	3090	470	3100	160	472	3090	471	3090	470	3100
435.gromacs	160	318	3590	317	3600	320	3570	160	314	3640	314	3630	313	3650
436.cactusADM	160	600	3190	599	3190	601	3180	160	600	3190	599	3190	601	3180
437.leslie3d	160	918	1640	919	1640	917	1640	80	375	2000	374	2010	374	2010
444.namd	160	523	2450	523	2450	528	2430	160	523	2450	523	2450	528	2430
447.dealII	160	360	5090	358	5110	360	5090	160	360	5090	358	5110	360	5090
450.soplex	160	763	1750	763	1750	762	1750	80	378	1770	378	1770	378	1770
453.povray	160	207	4120	205	4150	205	4150	160	177	4800	180	4740	181	4710
454.calculix	160	375	3520	377	3500	384	3440	160	375	3520	377	3500	384	3440
459.GemsFDTD	160	1189	1430	1186	1430	1186	1430	160	1189	1430	1186	1430	1186	1430
465.tonto	160	467	3370	468	3370	466	3380	160	443	3560	443	3560	441	3570
470.lbm	160	790	2780	788	2790	789	2790	160	790	2780	788	2790	789	2790
481.wrf	160	571	3130	573	3120	574	3110	160	564	3170	563	3170	563	3180
482.sphinx3	160	1098	2840	1097	2840	1100	2830	160	1098	2840	1097	2840	1100	2830

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 2900

Huawei RH8100 V3 (Intel Xeon E7-8891 v2)

SPECfp_rate_base2006 = 2820

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Oct-2014

Hardware Availability: Feb-2014

Software Availability: Nov-2013

Platform Notes

BIOS configuration:

Set Power Efficiency Mode to Performance

Set Lock_step to disabled

Baseboard Management Controller used to adjust the fan speed to 100%

C-State disabled

Sysinfo program /spec/config/sysinfo.rev6818

\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191

running on RH8100V3 Tue Oct 21 08:07:56 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E7-8891 v2 @ 3.20GHz

8 "physical id"s (chips)

160 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 10

siblings : 20

physical 0: cores 2 3 4 5 6 7 8 10 11 12

physical 1: cores 2 3 4 5 6 7 8 10 11 12

physical 2: cores 2 3 4 5 6 7 8 10 11 12

physical 3: cores 2 3 4 5 6 7 8 10 11 12

physical 4: cores 2 3 4 5 6 7 8 10 11 12

physical 5: cores 2 3 4 5 6 7 8 10 11 12

physical 6: cores 2 3 4 5 6 7 8 10 11 12

physical 7: cores 2 3 4 5 6 7 8 10 11 12

cache size : 38400 KB

From /proc/meminfo

MemTotal: 1058588860 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

/usr/bin/lsb_release -d

Red Hat Enterprise Linux Server release 6.5 (Santiago)

From /etc/*release* /etc/*version*

redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)

system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)

system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:

Linux RH8100V3 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013

x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Oct 21 07:44

SPEC is set to: /spec

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 2900

Huawei RH8100 V3 (Intel Xeon E7-8891 v2)

SPECfp_rate_base2006 = 2820

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Oct-2014
Hardware Availability: Feb-2014
Software Availability: Nov-2013

Platform Notes (Continued)

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	ext4	533G	28G	478G	6%	/

Additional information from dmidecode:

BIOS American Megatrends Inc. BLHSV325 09/30/2014

Memory:

128x 8 GB

128x Hynix HMT41GR7AFR8C-PB 8 GB 1333 MHz 2 rank

64x NO DIMM NO DIMM

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 1 TB and the dmidecode description should have one line reading as:

128x Hynix HMT41GR7AFR8C-PB 8 GB 1333 MHz 2 rank

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64:/spec/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 2900

Huawei RH8100 V3 (Intel Xeon E7-8891 v2)

SPECfp_rate_base2006 = 2820

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Oct-2014
Hardware Availability: Feb-2014
Software Availability: Nov-2013

Base Portability Flags (Continued)

```

416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

C++ benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

Fortran benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks (except as noted below):
icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:
ifort -m64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 2900

Huawei RH8100 V3 (Intel Xeon E7-8891 v2)

SPECfp_rate_base2006 = 2820

CPU2006 license: 3175

Test date: Oct-2014

Test sponsor: Huawei

Hardware Availability: Feb-2014

Tested by: Huawei

Software Availability: Nov-2013

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
 -prof-use(pass 2) -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: basepeak = yes

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
 -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
 -prof-use(pass 2) -unroll4 -ansi-alias

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 2900

Huawei RH8100 V3 (Intel Xeon E7-8891 v2)

SPECfp_rate_base2006 = 2820

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Oct-2014

Hardware Availability: Feb-2014

Software Availability: Nov-2013

Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-alloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 2900

Huawei RH8100 V3 (Intel Xeon E7-8891 v2)

SPECfp_rate_base2006 = 2820

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Oct-2014

Hardware Availability: Feb-2014

Software Availability: Nov-2013

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Nov 18 16:30:16 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 18 November 2014.