



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Huawei

SPECfp®2006 = 75.6

Huawei RH1288 V3 (Intel Xeon E5-2650 v3)

SPECfp\_base2006 = 68.8

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Jan-2014

Hardware Availability: Sep-2014

Software Availability: Nov-2013

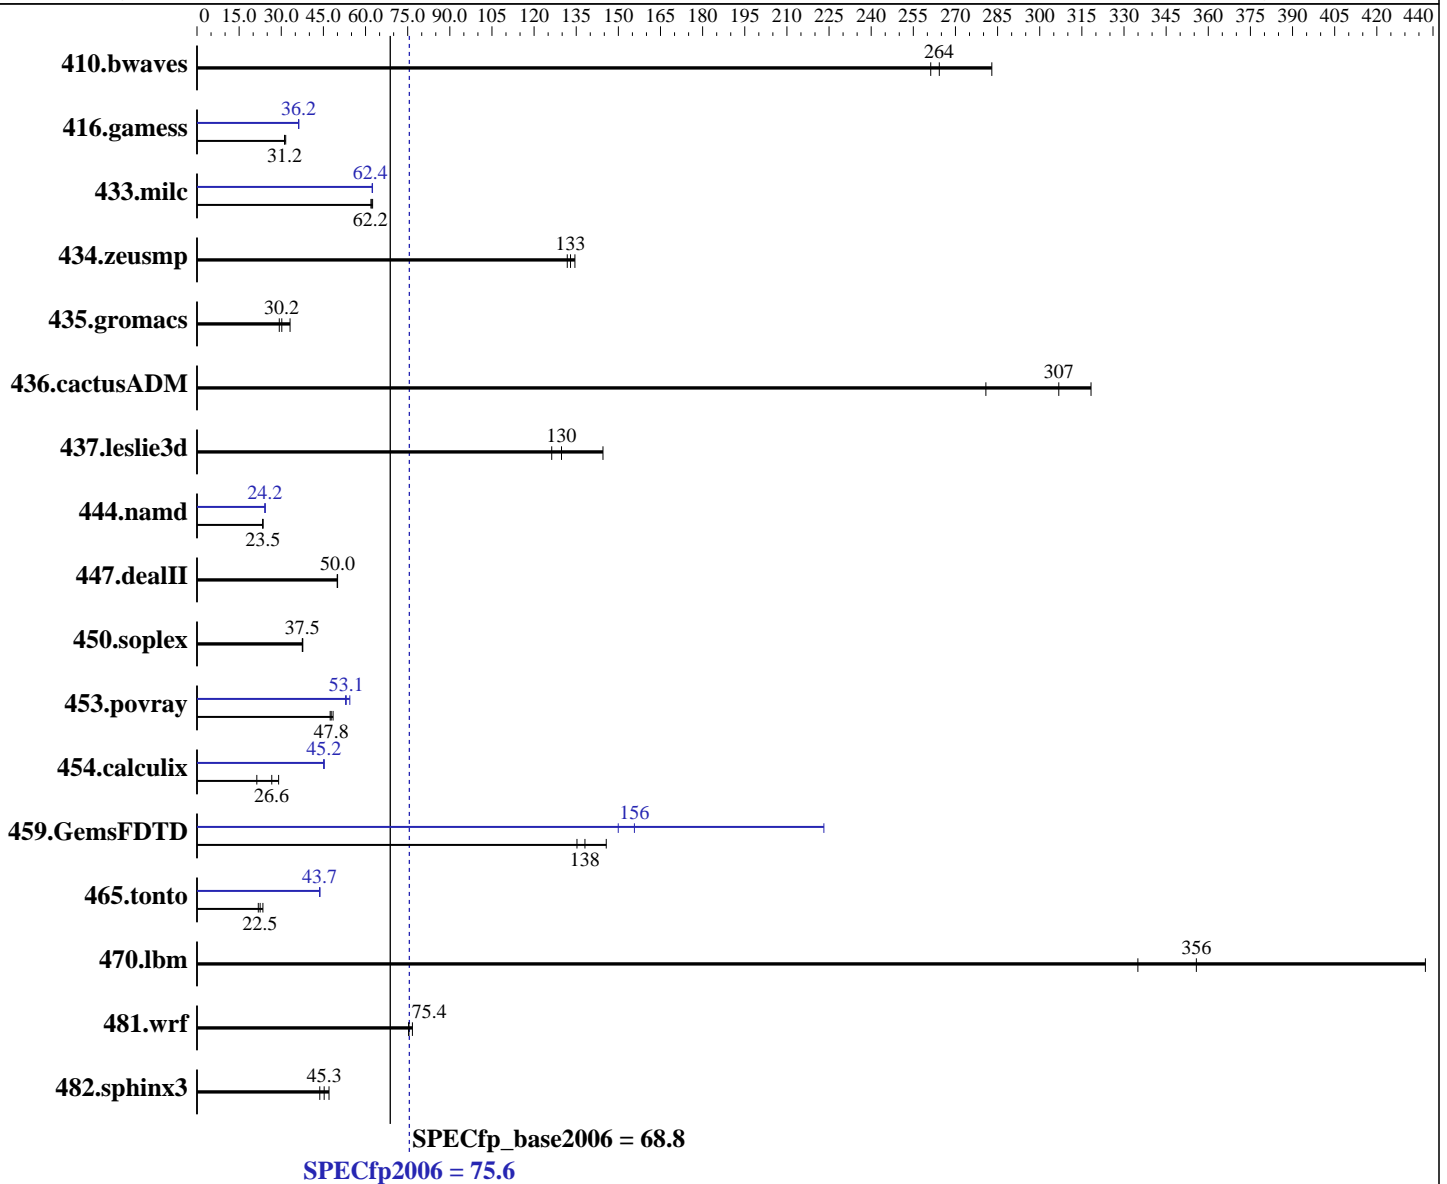

### Hardware

CPU Name: Intel Xeon E5-2650 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.00 GHz  
 CPU MHz: 2300  
 FPU: Integrated  
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
 2.6.32-431.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Huawei

SPECfp2006 = **75.6**

Huawei RH1288 V3 (Intel Xeon E5-2650 v3)

SPECfp\_base2006 = **68.8**

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jan-2014

Hardware Availability: Sep-2014

Software Availability: Nov-2013

L3 Cache: 25 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)  
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	<b>51.4</b>	<b>264</b>	48.0	283	52.0	261	<b>51.4</b>	<b>264</b>	48.0	283	52.0	261
416.gamess	629	31.2	<b>628</b>	<b>31.2</b>	620	31.6	541	36.2	<b>541</b>	<b>36.2</b>	541	36.2
433.milc	147	62.5	<b>148</b>	<b>62.2</b>	148	61.9	147	62.4	<b>147</b>	<b>62.4</b>	147	62.5
434.zeusmp	67.6	135	69.0	132	<b>68.4</b>	<b>133</b>	67.6	135	69.0	132	<b>68.4</b>	<b>133</b>
435.gromacs	<b>237</b>	<b>30.2</b>	244	29.3	216	33.1	<b>237</b>	<b>30.2</b>	244	29.3	216	33.1
436.cactusADM	37.5	318	<b>39.0</b>	<b>307</b>	42.6	281	37.5	318	<b>39.0</b>	<b>307</b>	42.6	281
437.leslie3d	<b>72.4</b>	<b>130</b>	65.0	145	74.4	126	<b>72.4</b>	<b>130</b>	65.0	145	74.4	126
444.namd	342	23.5	343	23.4	<b>342</b>	<b>23.5</b>	331	24.2	331	24.2	<b>331</b>	<b>24.2</b>
447.dealII	229	49.9	<b>229</b>	<b>50.0</b>	229	50.0	229	49.9	<b>229</b>	<b>50.0</b>	229	50.0
450.soplex	221	37.7	222	37.5	<b>222</b>	<b>37.5</b>	221	37.7	222	37.5	<b>222</b>	<b>37.5</b>
453.povray	<b>111</b>	<b>47.8</b>	110	48.4	112	47.4	101	52.9	<b>100</b>	<b>53.1</b>	97.8	54.4
454.calculix	284	29.1	<b>310</b>	<b>26.6</b>	387	21.3	182	45.3	<b>183</b>	<b>45.2</b>	183	45.1
459.GemsFDTD	72.8	146	78.4	135	<b>76.8</b>	<b>138</b>	70.7	150	<b>68.1</b>	<b>156</b>	47.5	223
465.tonto	419	23.5	<b>438</b>	<b>22.5</b>	451	21.8	225	43.8	226	43.6	<b>225</b>	<b>43.7</b>
470.lbm	31.4	437	41.0	335	<b>38.6</b>	<b>356</b>	31.4	437	41.0	335	<b>38.6</b>	<b>356</b>
481.wrf	146	76.7	<b>148</b>	<b>75.4</b>	148	75.3	146	76.7	<b>148</b>	<b>75.4</b>	148	75.3
482.sphinx3	446	43.7	<b>431</b>	<b>45.3</b>	415	47.0	446	43.7	<b>431</b>	<b>45.3</b>	415	47.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:  
 Set Power Efficiency Mode to Custom  
 Set Snoop Mode to HS  
 Baseboard Management Controller used to adjust the fan speed to 100%  
 Sysinfo program /spec/config/sysinfo.rev6818  
 \$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
 running on localhost Mon Jan 6 02:12:06 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 75.6

Huawei RH1288 V3 (Intel Xeon E5-2650 v3)

SPECfp\_base2006 = 68.8

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jan-2014

Hardware Availability: Sep-2014

Software Availability: Nov-2013

## Platform Notes (Continued)

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) CPU E5-2650 v3 @ 2.30GHz
 2 "physical id"s (chips)
 40 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 10
siblings   : 20
physical 0: cores 0 1 2 3 4 8 9 10 11 12
physical 1: cores 0 1 2 3 4 8 9 10 11 12
cache size : 25600 KB
```

From /proc/meminfo

```
MemTotal:      264274332 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

/usr/bin/lsb\_release -d

```
Red Hat Enterprise Linux Server release 6.5 (Santiago)
```

From /etc/\*release\* /etc/\*version\*

```
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

uname -a:

```
Linux localhost 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Jan 5 19:39

SPEC is set to: /spec

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdal        ext4  433G   98G  314G  24% /
```

Additional information from dmidecode:

BIOS Insyde Corp. 1.13 08/01/2014

Memory:

```
8x Samsung M393A2G40DB0-CPB 16 GB 2133 MHz 1 rank
8x Samsung M393A2G40DB0-CPB 16 GB 2133 MHz 2 rank
```

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64:/spec/sh"
OMP_NUM_THREADS = "40"
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 75.6

Huawei RH1288 V3 (Intel Xeon E5-2650 v3)

SPECfp\_base2006 = 68.8

CPU2006 license: 3175

Test date: Jan-2014

Test sponsor: Huawei

Hardware Availability: Sep-2014

Tested by: Huawei

Software Availability: Nov-2013

## General Notes (Continued)

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch  
-ansi-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 75.6

Huawei RH1288 V3 (Intel Xeon E5-2650 v3)

SPECfp\_base2006 = 68.8

CPU2006 license: 3175

Test date: Jan-2014

Test sponsor: Huawei

Hardware Availability: Sep-2014

Tested by: Huawei

Software Availability: Nov-2013

## Base Optimization Flags (Continued)

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch  
-ansi-alias

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32 -ansi-alias

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 75.6

Huawei RH1288 V3 (Intel Xeon E5-2650 v3)

SPECfp\_base2006 = 68.8

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jan-2014

Hardware Availability: Sep-2014

Software Availability: Nov-2013

## Peak Optimization Flags (Continued)

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
-ansi-alias

### Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-inline-calloc -opt-malloc-options=3 -auto -unroll4

### Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-HASWELL-V1.1.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-HASWELL-V1.1.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 75.6

Huawei RH1288 V3 (Intel Xeon E5-2650 v3)

SPECfp\_base2006 = 68.8

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jan-2014

Hardware Availability: Sep-2014

Software Availability: Nov-2013

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Nov 18 16:30:48 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 18 November 2014.