



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint®_rate2006 = 523

Huawei RH2285 V3 (Intel Xeon E5-2620 v3)

SPECint_rate_base2006 = 505

CPU2006 license: 3175


Test date: Mar-2014

Test sponsor: Huawei

Hardware Availability: Sep-2014

Tested by: Huawei

Software Availability: Nov-2013

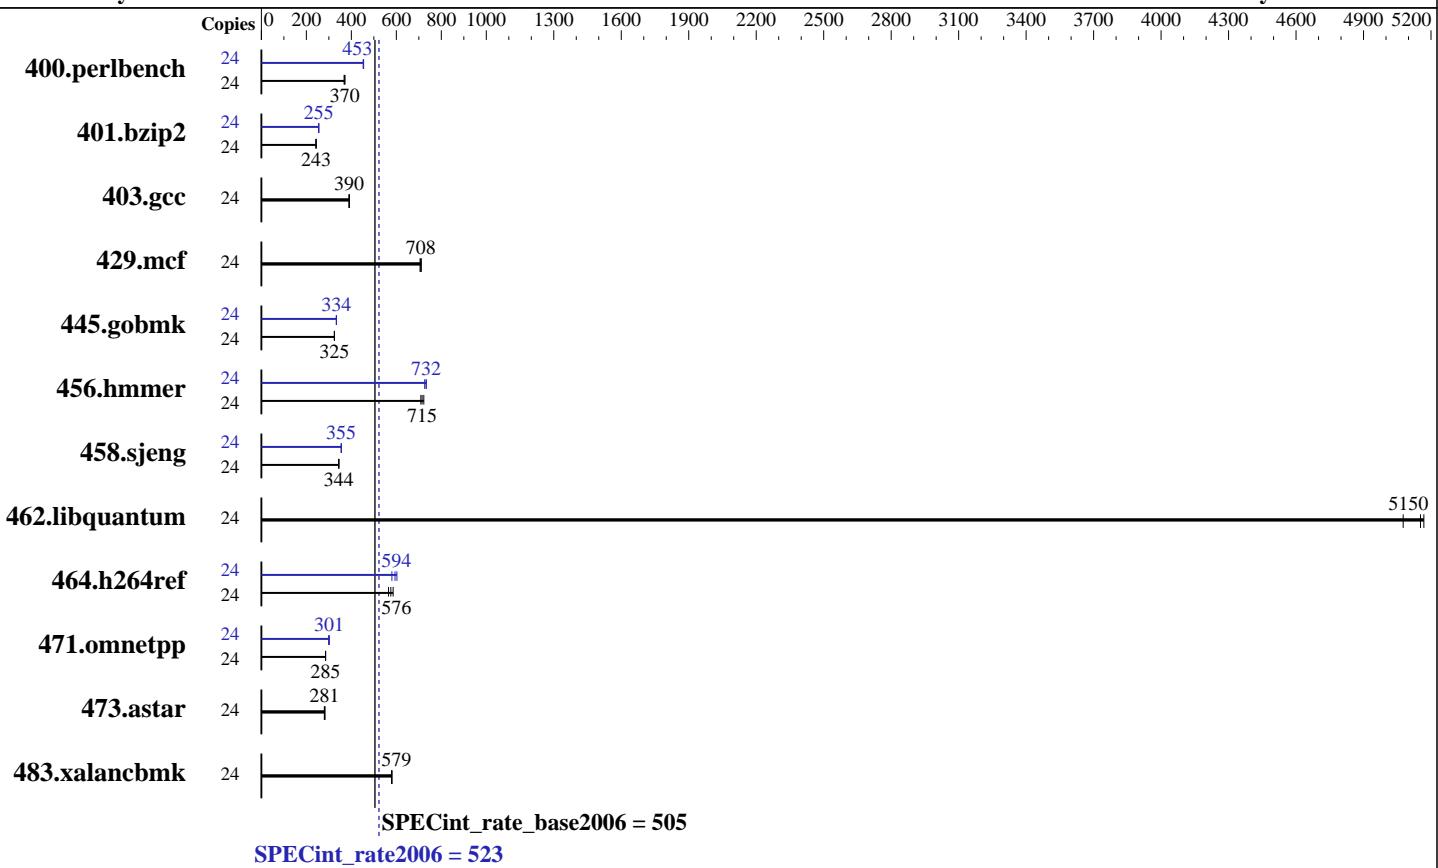

Hardware

CPU Name:	Intel Xeon E5-2620 v3
CPU Characteristics:	Intel Turbo Boost Technology up to 3.20 GHz
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	15 MB I+D on chip per chip
Other Cache:	None
Memory:	128 GB (16 x 8 GB 2Rx4 PC4-2133P-R, running at 1867 MHz)
Disk Subsystem:	1 x 500 GB SATA, 7200 RPM
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 6.5 (Santiago) 2.6.32-431.el6.x86_64
Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = 523

Huawei RH2285 V3 (Intel Xeon E5-2620 v3)

SPECint_rate_base2006 = 505

CPU2006 license: 3175

Test date: Mar-2014

Test sponsor: Huawei

Hardware Availability: Sep-2014

Tested by: Huawei

Software Availability: Nov-2013

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	633	370	638	368	631	371	24	517	453	517	453	516	455
401.bzip2	24	954	243	951	243	952	243	24	908	255	908	255	908	255
403.gcc	24	496	390	495	390	493	392	24	496	390	495	390	493	392
429.mcf	24	308	711	309	708	310	705	24	308	711	309	708	310	705
445.gobmk	24	775	325	775	325	775	325	24	755	334	754	334	755	333
456.hammer	24	316	709	313	715	310	722	24	305	733	308	726	306	732
458.sjeng	24	842	345	846	343	843	344	24	817	355	817	356	818	355
462.libquantum	24	96.5	5150	96.2	5170	98.0	5080	24	96.5	5150	96.2	5170	98.0	5080
464.h264ref	24	907	586	923	576	939	565	24	915	580	894	594	881	603
471.omnetpp	24	526	285	526	285	525	286	24	497	302	502	299	499	301
473.astar	24	599	281	596	283	602	280	24	599	281	596	283	602	280
483.xalancbmk	24	286	579	286	579	285	581	24	286	579	286	579	285	581

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:

Set Power Efficiency Mode to Custom

Set Snoop Mode to HS

Set Hyper-Threading to Disabled

Baseboard Management Controller used to adjust the fan speed to 100%

Sysinfo program /spec/config/sysinfo.rev6818

\$Rev: 6818 \$ \$Date::: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191

running on huawei Fri Mar 14 17:45:57 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2620 v3 @ 2.40GHz

2 "physical id"s (chips)

24 "processors"

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = 523

Huawei RH2285 V3 (Intel Xeon E5-2620 v3)

SPECint_rate_base2006 = 505

CPU2006 license: 3175

Test date: Mar-2014

Test sponsor: Huawei

Hardware Availability: Sep-2014

Tested by: Huawei

Software Availability: Nov-2013

Platform Notes (Continued)

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 6
siblings   : 12
physical 0: cores 0 1 2 3 4 5
physical 1: cores 0 1 2 3 4 5
cache size : 15360 KB
```

```
From /proc/meminfo
MemTotal:      131901860 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.5 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux huawei 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013 x86_64
x86_64 x86_64 GNU/Linux
```

```
run-level 3 Mar 14 06:15
```

```
SPEC is set to: /spec
Filesystem      Type  Size  Used  Avail Use% Mounted on
/dev/sdal      ext4  438G  69G  347G  17%  /
```

Additional information from dmidecode:

```
BIOS Insyde Corp. 1.16 09/02/2014
Memory:
 8x Samsung M393A1G40DB0-CPB 8 GB 1867 MHz 1 rank
 8x Samsung M393A1G40DB0-CPB 8 GB 1867 MHz 2 rank
```

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64:/spec/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = 523

Huawei RH2285 V3 (Intel Xeon E5-2620 v3)

SPECint_rate_base2006 = 505

CPU2006 license: 3175

Test date: Mar-2014

Test sponsor: Huawei

Hardware Availability: Sep-2014

Tested by: Huawei

Software Availability: Nov-2013

General Notes (Continued)

runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

 icc -m32

C++ benchmarks:

 icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

 -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
 -opt-mem-layout-trans=3

C++ benchmarks:

 -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
 -opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

 icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = 523

Huawei RH2285 V3 (Intel Xeon E5-2620 v3)

SPECint_rate_base2006 = 505

CPU2006 license: 3175

Test date: Mar-2014

Test sponsor: Huawei

Hardware Availability: Sep-2014

Tested by: Huawei

Software Availability: Nov-2013

Peak Compiler Invocation (Continued)

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

401.bzip2: -DSPEC_CPU_LP64

456.hmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll14 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll12 -ansi-alias

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei RH2285 V3 (Intel Xeon E5-2620 v3)

SPECint_rate2006 = 523

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Mar-2014

Hardware Availability: Sep-2014

Software Availability: Nov-2013

Peak Optimization Flags (Continued)

C++ benchmarks:

```
471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
             -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
             -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
             -L/sh -lsmartheap
```

```
473.astar: basepeak = yes
```

```
483.xalancbmk: basepeak = yes
```

Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-HASWELL-V1.1.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-HASWELL-V1.1.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Nov 18 16:31:57 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 18 November 2014.