



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Sugon**

**SPECint\_rate2006 = 1400**

Sugon I620-G20 (Intel Xeon E5-2699 v3)

**SPECint\_rate\_base2006 = 1360**

CPU2006 license: 9046


**Test date:** Oct-2014

Test sponsor: Sugon

**Hardware Availability:** Sep-2014

Tested by: Sugon

**Software Availability:** Aug-2014

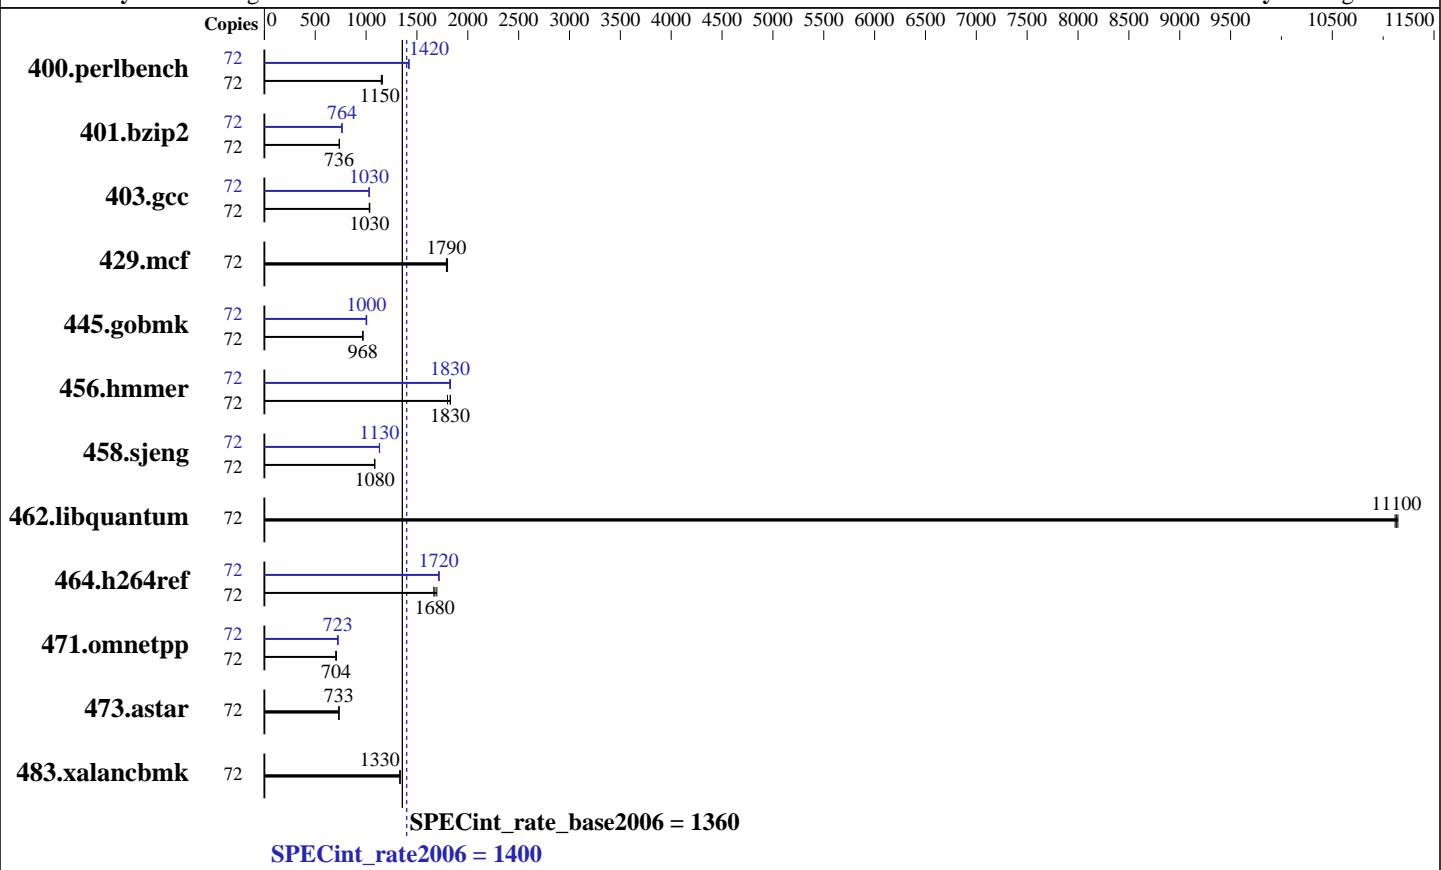

## Hardware

CPU Name: Intel Xeon E5-2699 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz  
 CPU MHz: 2300  
 FPU: Integrated  
 CPU(s) enabled: 36 cores, 2 chips, 18 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 45 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)  
 Disk Subsystem: 1 x 2.0 TB SATA Disk  
 Other Hardware: None

## Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
 Compiler: 2.6.32-431.el6.x86\_64  
 Auto Parallel: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Sugon**

**SPECint\_rate2006 = 1400**

**Sugon I620-G20 (Intel Xeon E5-2699 v3)**

**SPECint\_rate\_base2006 = 1360**

**CPU2006 license:** 9046

**Test date:** Oct-2014

**Test sponsor:** Sugon

**Hardware Availability:** Sep-2014

**Tested by:** Sugon

**Software Availability:** Aug-2014

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	72	612	1150	<b>609</b>	<b>1150</b>	607	1160	<b>72</b>	<b>495</b>	<b>1420</b>	495	1420	495	1420
401.bzip2	72	944	736	<b>944</b>	<b>736</b>	941	738	<b>72</b>	<b>909</b>	<b>764</b>	913	761	<b>910</b>	<b>764</b>
403.gcc	72	<b>561</b>	<b>1030</b>	559	1040	562	1030	<b>72</b>	<b>563</b>	<b>1030</b>	<b>563</b>	<b>1030</b>	563	1030
429.mcf	72	367	1790	365	1800	<b>366</b>	<b>1790</b>	<b>72</b>	<b>367</b>	<b>1790</b>	365	1800	<b>366</b>	<b>1790</b>
445.gobmk	72	<b>780</b>	<b>968</b>	780	968	780	968	<b>72</b>	<b>751</b>	<b>1010</b>	<b>752</b>	<b>1000</b>	755	1000
456.hammer	72	373	1800	<b>368</b>	<b>1830</b>	367	1830	<b>72</b>	<b>369</b>	<b>1820</b>	<b>367</b>	<b>1830</b>	367	1830
458.sjeng	72	<b>803</b>	<b>1080</b>	804	1080	802	1090	<b>72</b>	<b>769</b>	<b>1130</b>	770	1130	<b>770</b>	<b>1130</b>
462.libquantum	72	134	11100	134	11100	<b>134</b>	<b>11100</b>	<b>72</b>	134	<b>11100</b>	134	11100	<b>134</b>	<b>11100</b>
464.h264ref	72	957	1670	940	1700	<b>950</b>	<b>1680</b>	<b>72</b>	927	1720	929	1710	<b>929</b>	<b>1720</b>
471.omnetpp	72	641	702	<b>639</b>	<b>704</b>	636	708	<b>72</b>	<b>624</b>	<b>721</b>	622	724	<b>622</b>	<b>723</b>
473.astar	72	691	732	689	734	<b>690</b>	<b>733</b>	<b>72</b>	691	732	689	734	<b>690</b>	<b>733</b>
483.xalancbmk	72	373	1330	372	1330	<b>372</b>	<b>1330</b>	<b>72</b>	373	1330	372	1330	<b>372</b>	<b>1330</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Configuration:

Enforce POR set to disabled

Memory Frequency set to 2133

Early Snoop set to disabled

COD set to enable

Power Technology set to performance

Sysinfo program /home/cpu2006/config/sysinfo.rev6874

\$Rev: 6874 \$ \$Date::: 2013-11-20 ## 654bd3fcf53b06faef0efe54ed011998

running on localhost Wed Oct 22 00:26:22 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2699 v3 @ 2.30GHz  
2 "physical id"s (chips)

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECint\_rate2006 = 1400

Sugon I620-G20 (Intel Xeon E5-2699 v3)

SPECint\_rate\_base2006 = 1360

CPU2006 license: 9046

Test date: Oct-2014

Test sponsor: Sugon

Hardware Availability: Sep-2014

Tested by: Sugon

Software Availability: Aug-2014

## Platform Notes (Continued)

```
72 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 18
    siblings   : 36
    physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
    physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
    cache size : 23040 KB

From /proc/meminfo
MemTotal:           264473908 kB
HugePages_Total:      0
Hugepagesize:        2048 kB

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.5 (Santiago)

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
Linux localhost 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013
x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Oct 20 07:29

SPEC is set to: /home/cpu2006
Filesystem      Type  Size  Used  Avail Use% Mounted on
/dev/sda3        ext4  1.8T  522G  1.2T  31% /
Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program
reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to
hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 068 08/15/2014
Memory:
16x Hynix Semiconductor HMA42GR7MFR4N-TFTD 16 GB 2 rank 2133 MHz
8x NO DIMM NO DIMM

(End of data from sysinfo program)
```

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

**SPECint\_rate2006 = 1400**

Sugon I620-G20 (Intel Xeon E5-2699 v3)

**SPECint\_rate\_base2006 = 1360**

**CPU2006 license:** 9046

**Test sponsor:** Sugon

**Tested by:** Sugon

**Test date:** Oct-2014

**Hardware Availability:** Sep-2014

**Software Availability:** Aug-2014

## General Notes (Continued)

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

Submitted\_by: Tian Yuwan <tianyw@sugon.com>

Submitted: Wed Oct 22 23:30:22 EDT 2014

Submission: cpu2006-20141022-32563.sub

## Base Compiler Invocation

C benchmarks:

```
icc -m32
```

C++ benchmarks:

```
icpc -m32
```

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap
```

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Sugon**

**SPECint\_rate2006 = 1400**

**Sugon I620-G20 (Intel Xeon E5-2699 v3)**

**SPECint\_rate\_base2006 = 1360**

**CPU2006 license:** 9046

**Test date:** Oct-2014

**Test sponsor:** Sugon

**Hardware Availability:** Sep-2014

**Tested by:** Sugon

**Software Availability:** Aug-2014

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll14 -auto-ilp32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

**SPECint\_rate2006 = 1400**

Sugon I620-G20 (Intel Xeon E5-2699 v3)

**SPECint\_rate\_base2006 = 1360**

CPU2006 license: 9046

Test date: Oct-2014

Test sponsor: Sugon

Hardware Availability: Sep-2014

Tested by: Sugon

Software Availability: Aug-2014

## Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll12 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.html>  
<http://www.spec.org/cpu2006/flags/Sugon-Platform-Settings-V1.2-HSW-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.xml>  
<http://www.spec.org/cpu2006/flags/Sugon-Platform-Settings-V1.2-HSW-revA.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Nov 18 16:32:13 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 18 November 2014.