



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECfp®_rate2006 = 692

Sugon I620-G20(Intel Xeon E5-2650 v3)

SPECfp_rate_base2006 = 675

CPU2006 license: 9046


Test date: Sep-2014

Test sponsor: Sugon

Hardware Availability: Sep-2014

Tested by: Sugon

Software Availability: Sep-2013

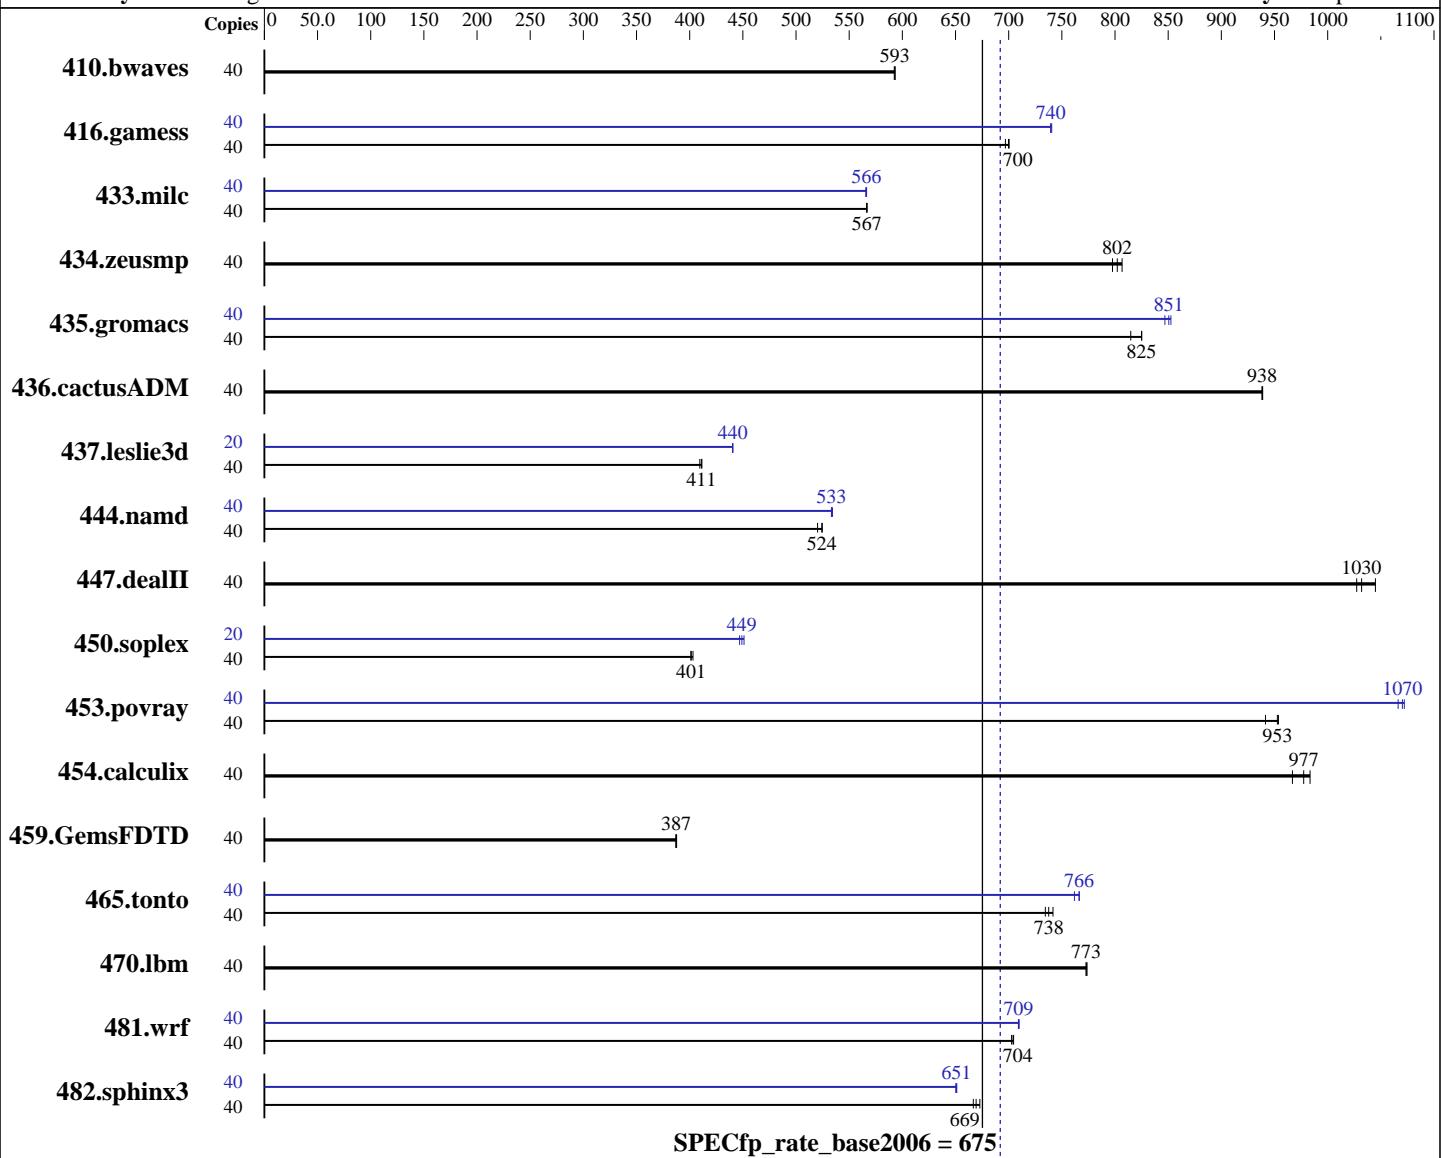

SPECfp_rate_base2006 = 675

SPECfp_rate2006 = 692

Hardware

CPU Name: Intel Xeon E5-2650 v3
CPU Characteristics: Intel Turbo Boost Technology up to 3.00 GHz
CPU MHz: 2300
FPU: Integrated
CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core
CPU(s) orderable: 1,2 chip
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)
Compiler: 2.6.32-431.el6.x86_64
C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
Auto Parallel: No
File System: ext4
Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECfp_rate2006 = 692

Sugon I620-G20(Intel Xeon E5-2650 v3)

SPECfp_rate_base2006 = 675

CPU2006 license: 9046

Test date: Sep-2014

Test sponsor: Sugon

Hardware Availability: Sep-2014

Tested by: Sugon

Software Availability: Sep-2013

L3 Cache: 25 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)
 Disk Subsystem: 1 x 2.0 TB SATA DISK
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	40	916	593	918	592	917	593	40	916	593	918	592	917	593
416.gamess	40	1124	697	1119	700	1118	700	40	1059	740	1059	740	1058	740
433.milc	40	648	566	648	567	648	567	40	649	566	649	566	648	566
434.zeusmp	40	451	807	454	802	456	798	40	451	807	454	802	456	798
435.gromacs	40	346	825	351	815	346	825	40	336	851	337	847	335	853
436.cactusADM	40	509	939	509	938	509	938	40	509	939	509	938	509	938
437.leslie3d	40	915	411	914	411	918	410	20	427	440	427	440	427	440
444.namd	40	612	524	611	525	617	520	40	601	533	602	533	600	534
447.dealII	40	438	1040	443	1030	445	1030	40	438	1040	443	1030	445	1030
450.soplex	40	828	403	831	401	832	401	20	370	451	373	447	371	449
453.povray	40	226	942	223	953	223	954	40	199	1070	200	1070	198	1070
454.calculix	40	336	983	338	977	341	967	40	336	983	338	977	341	967
459.GemsFDTD	40	1097	387	1096	387	1095	388	40	1097	387	1096	387	1095	388
465.tonto	40	534	738	531	742	536	734	40	517	762	514	766	514	766
470.lbm	40	711	773	711	773	710	774	40	711	773	711	773	710	774
481.wrf	40	635	704	634	705	636	703	40	629	710	630	709	630	709
482.sphinx3	40	1169	667	1165	669	1159	673	40	1198	651	1199	650	1197	651

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Enforce POR set to disabled
 Memory Frequency set to 2133
 Early Snoop set to disabled

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECfp_rate2006 = 692

Sugon I620-G20(Intel Xeon E5-2650 v3)

SPECfp_rate_base2006 = 675

CPU2006 license: 9046

Test date: Sep-2014

Test sponsor: Sugon

Hardware Availability: Sep-2014

Tested by: Sugon

Software Availability: Sep-2013

Platform Notes (Continued)

```
COD set to enable
Power Technology set to performance
Sysinfo program /home/cpu2006/config/sysinfo.rev6874
$Rev: 6874 $ $Date:: 2013-11-20 ## 654bd3fcf53b06faef0efe54ed011998
running on localhost.localdomain Fri Sep 19 14:00:11 2014
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2650 v3 @ 2.30GHz
        2 "physical id"s (chips)
        40 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The
    following excerpts from /proc/cpuinfo might not be reliable. Use with
    caution.)
        cpu cores : 10
        siblings : 20
        physical 0: cores 0 1 2 3 4 8 9 10 11 12
        physical 1: cores 0 1 2 3 4 8 9 10 11 12
    cache size : 12800 KB
```

```
From /proc/meminfo
    MemTotal:      264477876 kB
    HugePages_Total:       0
    Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
    Red Hat Enterprise Linux Server release 6.5 (Santiago)
```

```
From /etc/*release* /etc/*version*
    redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
    system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
    system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
    Linux localhost.localdomain 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54
    EST 2013 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Sep 19 01:45
```

```
SPEC is set to: /home/cpu2006
    Filesystem      Type  Size  Used Avail Use% Mounted on
    /dev/sda3        ext4  1.8T  370G  1.4T  22% /
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

Sugon I620-G20(Intel Xeon E5-2650 v3)

SPECfp_rate2006 = 692

CPU2006 license: 9046

Test date: Sep-2014

Test sponsor: Sugon

Hardware Availability: Sep-2014

Tested by: Sugon

Software Availability: Sep-2013

Platform Notes (Continued)

BIOS American Megatrends Inc. 068 08/15/2014

Memory:

16x Hynix Semiconductor HMA42GR7MFR4N-TFTD 16 GB 2 rank 2133 MHz
8x NO DIMM NO DIMM

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Submitted_by: Tian Yuwan <tianyw@sugon.com>

Submitted: Wed Nov 5 03:41:05 EST 2014

Submission: cpu2006-20141023-32564.sub

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64 -nofor_main

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

Sugon I620-G20(Intel Xeon E5-2650 v3)

SPECfp_rate2006 = 692

SPECfp_rate_base2006 = 675

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Sep-2014

Hardware Availability: Sep-2014

Software Availability: Sep-2013

Base Portability Flags (Continued)

```
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main  
437.leslie3d: -DSPEC_CPU_LP64  
    444.namd: -DSPEC_CPU_LP64  
    447.dealII: -DSPEC_CPU_LP64  
    450.soplex: -DSPEC_CPU_LP64  
    453.povray: -DSPEC_CPU_LP64  
    454.calculix: -DSPEC_CPU_LP64 -nofor_main  
459.GemsFDTD: -DSPEC_CPU_LP64  
    465.tonto: -DSPEC_CPU_LP64  
    470.lbm: -DSPEC_CPU_LP64  
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX  
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64
```

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

```
icpc -m64
```

450.soplex: icpc -m32

Fortran benchmarks:

```
ifort -m64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

Sugon I620-G20(Intel Xeon E5-2650 v3)

SPECfp_rate2006 = 692

SPECfp_rate_base2006 = 675

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Sep-2014

Hardware Availability: Sep-2014

Software Availability: Sep-2013

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div(pass 2)
           -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
           -auto-ilp32

```

470.lbm: basepeak = yes

```

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
              -unroll12

```

C++ benchmarks:

```

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div(pass 2)
           -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
           -auto-ilp32

```

447.dealII: basepeak = yes

```

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
             -O3(pass 2) -no-prec-div(pass 2)
             -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

Sugon I620-G20(Intel Xeon E5-2650 v3)

SPECfp_rate2006 = 692

SPECfp_rate_base2006 = 675

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Sep-2014

Hardware Availability: Sep-2014

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

450.soplex (continued):

-opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.html>

<http://www.spec.org/cpu2006/flags/Sugon-Platform-Settings-V1.2-HSW-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.xml>

<http://www.spec.org/cpu2006/flags/Sugon-Platform-Settings-V1.2-HSW-revA.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

Sugon I620-G20(Intel Xeon E5-2650 v3)

SPECfp_rate2006 = 692

SPECfp_rate_base2006 = 675

CPU2006 license: 9046

Test date: Sep-2014

Test sponsor: Sugon

Hardware Availability: Sep-2014

Tested by: Sugon

Software Availability: Sep-2013

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Nov 18 16:32:14 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 18 November 2014.