



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer TD350 (Intel Xeon E5-2667 v3,  
3.20 GHz)

**SPECint\_rate2006 = 821**

**SPECint\_rate\_base2006 = 795**

CPU2006 license: 9017


Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

**Test date:** Oct-2014

**Hardware Availability:** Sep-2014

**Software Availability:** Nov-2014

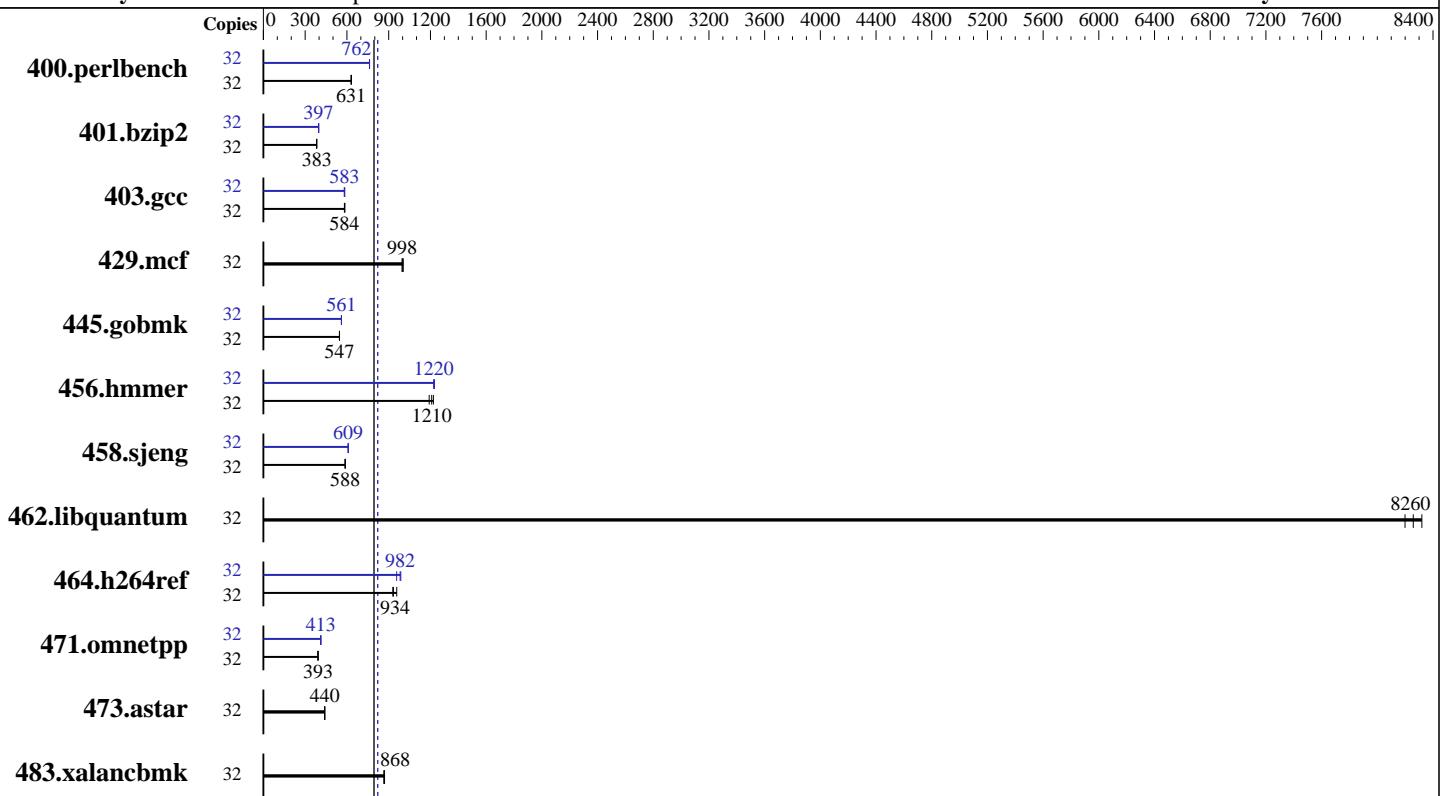

**SPECint\_rate\_base2006 = 795**

**SPECint\_rate2006 = 821**

### Hardware

CPU Name:	Intel Xeon E5-2667 v3
CPU Characteristics:	Intel Turbo Boost Technology up to 3.60 GHz
CPU MHz:	3200
FPU:	Integrated
CPU(s) enabled:	16 cores, 2 chips, 8 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	20 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)
Disk Subsystem:	1 x 800 GB SATA SSD
Other Hardware:	None

### Software

Operating System:	Red Hat Enterprise Linux Server release 6.5 (Santiago) 2.6.32-431.el6.x86_64
Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer TD350 (Intel Xeon E5-2667 v3,  
3.20 GHz)

**SPECint\_rate2006 = 821**

**SPECint\_rate\_base2006 = 795**

CPU2006 license: 9017

Test date: Oct-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Sep-2014

Tested by: Lenovo Group Limited

Software Availability: Nov-2014

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	<b>496</b>	<b>631</b>	494	633	496	630	32	<b>410</b>	<b>762</b>	410	762	410	763
401.bzip2	32	807	383	806	383	<b>806</b>	<b>383</b>	32	<b>778</b>	<b>397</b>	777	398	<b>779</b>	396
403.gcc	32	<b>441</b>	<b>584</b>	440	585	443	582	32	<b>442</b>	<b>583</b>	444	581	441	584
429.mcf	32	291	1000	293	996	<b>292</b>	<b>998</b>	32	291	1000	293	996	<b>292</b>	<b>998</b>
445.gobmk	32	<b>614</b>	<b>547</b>	614	547	615	546	32	<b>599</b>	<b>561</b>	598	561	<b>599</b>	560
456.hmmer	32	251	1190	245	1220	<b>247</b>	<b>1210</b>	32	244	1220	243	1230	<b>244</b>	<b>1220</b>
458.sjeng	32	<b>659</b>	<b>588</b>	659	588	659	587	32	635	610	<b>635</b>	<b>609</b>	636	609
462.libquantum	32	<b>80.3</b>	<b>8260</b>	80.9	8200	79.7	8320	32	<b>80.3</b>	<b>8260</b>	80.9	8200	<b>79.7</b>	8320
464.h264ref	32	739	958	<b>758</b>	<b>934</b>	762	930	32	718	987	<b>721</b>	<b>982</b>	740	957
471.omnetpp	32	512	391	<b>509</b>	<b>393</b>	508	393	32	<b>485</b>	<b>413</b>	486	411	484	413
473.astar	32	510	440	<b>510</b>	<b>440</b>	509	441	32	510	440	<b>510</b>	<b>440</b>	509	441
483.xalancbmk	32	<b>254</b>	<b>868</b>	254	870	255	865	32	<b>254</b>	<b>868</b>	254	870	255	865

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:

Cluster On Die set to Enabled

Early Snoop set to Disabled

Performance Profile set to Custom

C1E Support set to Disabled

Core C3 set to Disabled

Core C6 set to Disabled

Thermal Profile set to Max Performance

Memory Power Savings set to Disabled

Sysinfo program /usr/cpu2006/config/sysinfo.rev6818

\$Rev: 6818 \$ \$Date::: 2012-07-17 ## e86d102572650a6e4d596a3cee98f191

running on TD350 Thu Oct 23 17:48:55 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer TD350 (Intel Xeon E5-2667 v3,  
3.20 GHz)

**SPECint\_rate2006 = 821**

**SPECint\_rate\_base2006 = 795**

**CPU2006 license:** 9017

**Test date:** Oct-2014

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Sep-2014

**Tested by:** Lenovo Group Limited

**Software Availability:** Nov-2014

## Platform Notes (Continued)

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2667 v3 @ 3.20GHz
        2 "physical id"s (chips)
        32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 8
    siblings   : 16
    physical 0: cores 0 1 2 3 4 5 6 7
    physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal:      264413660 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.5 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux TD350 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013 x86_64
x86_64 x86_64 GNU/Linux
```

```
run-level 3 Oct 23 17:48
```

```
SPEC is set to: /usr/cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        ext4  730G   94G  600G  14% /
```

Additional information from dmidecode:

```
BIOS LENOVO TB5TS110 10/06/2014
Memory:
 16x 16 GB
 16x Samsung M393A2G40DB0-CPB 16 GB 2133 MHz 2 rank
```

(End of data from sysinfo program)

TD350 support 4 channels and 8 DIMMs per processor, total 8 channels and  
16 DIMMs. All 16 DIMM slots installed with 16 GB DIMM for this run.

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64:/usr/cpu2006/sh"

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer TD350 (Intel Xeon E5-2667 v3,  
3.20 GHz)

**SPECint\_rate2006 = 821**

**SPECint\_rate\_base2006 = 795**

**CPU2006 license:** 9017

**Test date:** Oct-2014

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Sep-2014

**Tested by:** Lenovo Group Limited

**Software Availability:** Nov-2014

## General Notes (Continued)

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB  
memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:

```
icc -m32
```

C++ benchmarks:

```
icpc -m32
```

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap
```

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer TD350 (Intel Xeon E5-2667 v3,  
3.20 GHz)

**SPECint\_rate2006 = 821**

**SPECint\_rate\_base2006 = 795**

**CPU2006 license:** 9017

**Test date:** Oct-2014

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Sep-2014

**Tested by:** Lenovo Group Limited

**Software Availability:** Nov-2014

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll14 -auto-ilp32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer TD350 (Intel Xeon E5-2667 v3,  
3.20 GHz)

**SPECint\_rate2006 = 821**

**SPECint\_rate\_base2006 = 795**

**CPU2006 license:** 9017

**Test sponsor:** Lenovo Group Limited

**Tested by:** Lenovo Group Limited

**Test date:** Oct-2014

**Hardware Availability:** Sep-2014

**Software Availability:** Nov-2014

## Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll12 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-revA.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Nov 18 16:33:19 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 18 November 2014.