



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Sugon

SPECfp<sup>®</sup>2006 = **105**

### Sugon I620-G20 (Intel Xeon E5-2660 v3)

SPECfp\_base2006 = **102**

CPU2006 license: 9046


Test sponsor: Sugon

Tested by: Sugon

Test date: Oct-2014

Hardware Availability: Sep-2014

Software Availability: Sep-2013

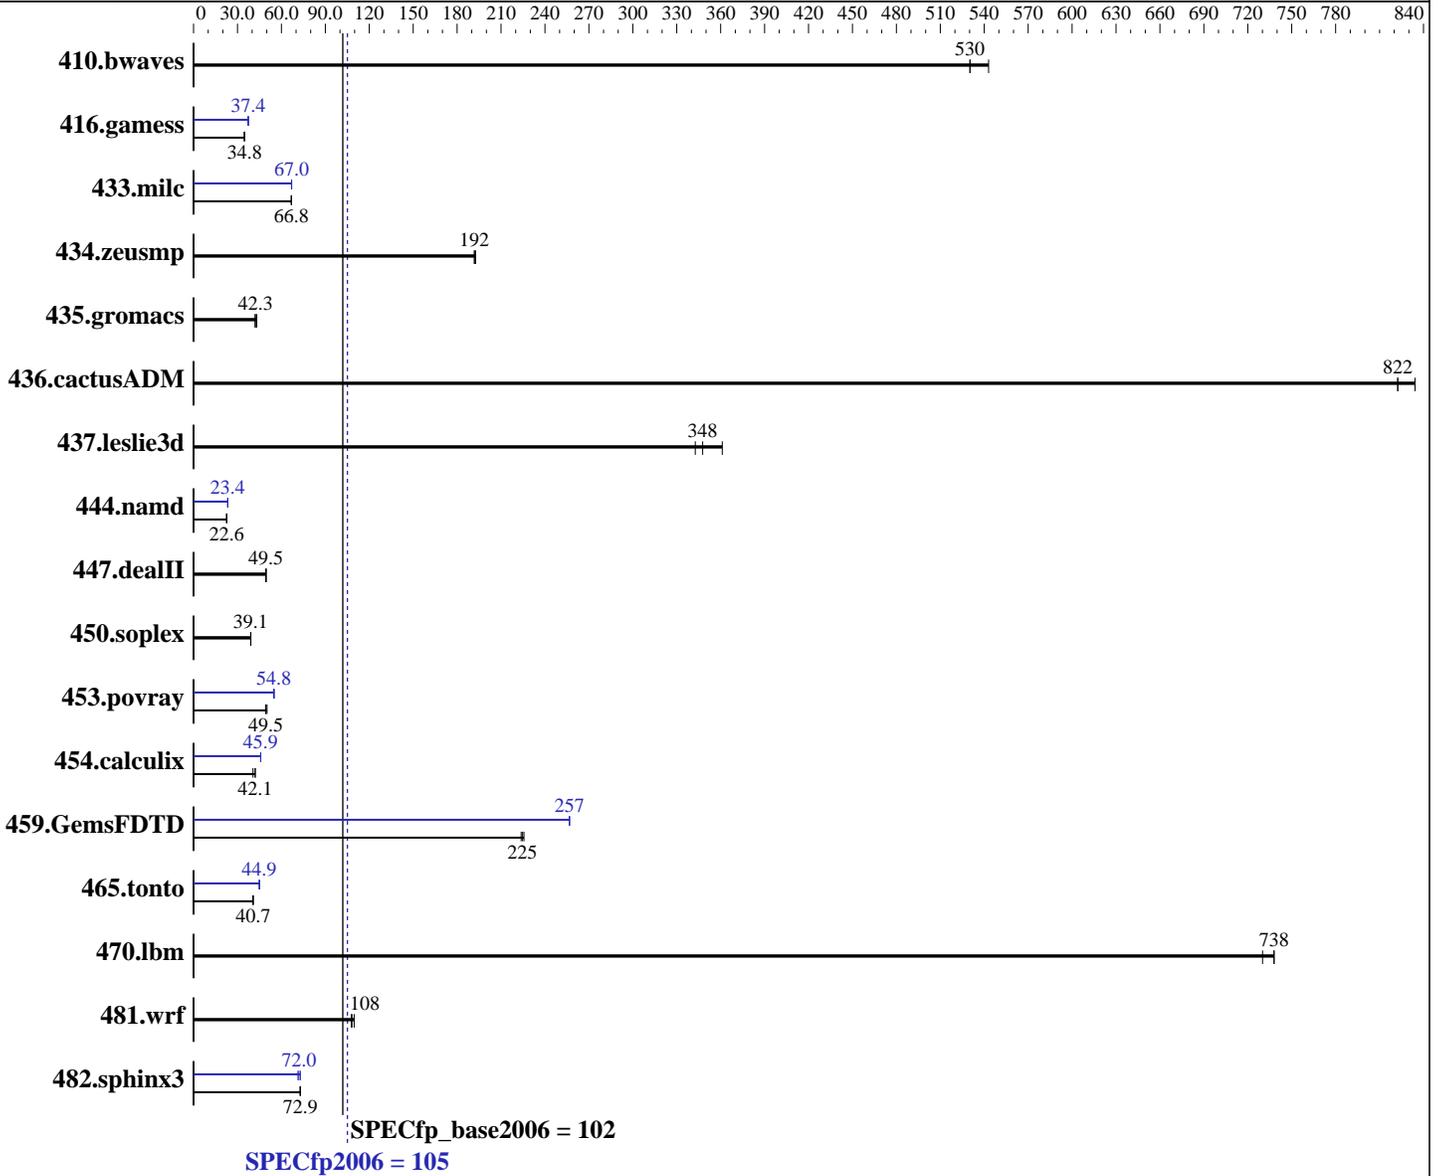

### Hardware

CPU Name: Intel Xeon E5-2660 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
 2.6.32-358.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Sugon

SPECfp2006 = **105**

Sugon I620-G20 (Intel Xeon E5-2660 v3)

SPECfp\_base2006 = **102**

CPU2006 license: 9046

Test date: Oct-2014

Test sponsor: Sugon

Hardware Availability: Sep-2014

Tested by: Sugon

Software Availability: Sep-2013

L3 Cache: 25 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)  
 Disk Subsystem: 1 x 2.0 TB SATA 7200 RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	25.6	530	25.0	543	<u>25.6</u>	<u>530</u>	25.6	530	25.0	543	<u>25.6</u>	<u>530</u>
416.gamess	<u>563</u>	<u>34.8</u>	563	34.8	565	34.7	<u>523</u>	<u>37.4</u>	523	37.4	526	37.2
433.milc	138	66.7	137	66.8	<u>137</u>	<u>66.8</u>	137	66.9	137	67.0	<u>137</u>	<u>67.0</u>
434.zeusmp	47.4	192	<u>47.4</u>	<u>192</u>	47.2	193	47.4	192	<u>47.4</u>	<u>192</u>	47.2	193
435.gromacs	170	42.0	165	43.2	<u>169</u>	<u>42.3</u>	170	42.0	165	43.2	<u>169</u>	<u>42.3</u>
436.cactusADM	14.5	822	14.3	834	<u>14.5</u>	<u>822</u>	14.5	822	14.3	834	<u>14.5</u>	<u>822</u>
437.leslie3d	26.0	361	<u>27.0</u>	<u>348</u>	27.4	343	26.0	361	<u>27.0</u>	<u>348</u>	27.4	343
444.namd	<u>355</u>	<u>22.6</u>	355	22.6	354	22.6	344	23.3	343	23.4	<u>343</u>	<u>23.4</u>
447.dealII	231	49.5	<u>231</u>	<u>49.5</u>	231	49.5	231	49.5	<u>231</u>	<u>49.5</u>	231	49.5
450.soplex	<u>213</u>	<u>39.1</u>	213	39.1	214	39.0	<u>213</u>	<u>39.1</u>	213	39.1	214	39.0
453.povray	108	49.2	106	50.2	<u>108</u>	<u>49.5</u>	96.5	55.1	97.2	54.7	<u>97.0</u>	<u>54.8</u>
454.calculix	196	42.1	203	40.6	<u>196</u>	<u>42.1</u>	180	45.9	180	45.8	<u>180</u>	<u>45.9</u>
459.GemsFDTD	47.0	226	<u>47.2</u>	<u>225</u>	47.4	224	41.3	257	<u>41.3</u>	<u>257</u>	41.3	257
465.tonto	243	40.4	<u>242</u>	<u>40.7</u>	241	40.8	<u>219</u>	<u>44.9</u>	218	45.0	219	44.9
470.lbm	18.6	738	<u>18.6</u>	<u>738</u>	18.8	730	18.6	738	<u>18.6</u>	<u>738</u>	18.8	730
481.wrf	104	108	<u>103</u>	<u>108</u>	102	110	104	108	<u>103</u>	<u>108</u>	102	110
482.sphinx3	268	72.7	267	73.0	<u>267</u>	<u>72.9</u>	<u>271</u>	<u>72.0</u>	273	71.3	267	73.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Configuration:  
 Enforce POR set to disabled  
 DDR Speed set to 2133  
 Early Snoop set to disabled  
 COD set to disable  
 Power Technology set to performance  
 Sysinfo program /home/cpu2006/config/sysinfo.rev6818  
 \$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
 running on localhost.localdomain Fri Oct 10 09:04:09 2014

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Sugon

**SPECfp2006 = 105**

### Sugon I620-G20 (Intel Xeon E5-2660 v3)

**SPECfp\_base2006 = 102**

**CPU2006 license:** 9046

**Test sponsor:** Sugon

**Tested by:** Sugon

**Test date:** Oct-2014

**Hardware Availability:** Sep-2014

**Software Availability:** Sep-2013

## Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
model name      : Intel(R) Xeon(R) CPU E5-2660 v3 @ 2.60GHz
 2 "physical id"s (chips)
 40 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores    : 10
  siblings     : 20
  physical 0   : cores 0 1 2 3 4 8 9 10 11 12
  physical 1   : cores 0 1 2 3 4 8 9 10 11 12
cache size     : 25600 KB

```

```

From /proc/meminfo
MemTotal:      264478588 kB
HugePages_Total: 0
Hugepagesize:  2048 kB

```

```

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)

```

```

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

```

```

uname -a:
Linux localhost.localdomain 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41
EST 2013 x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Oct 9 09:21

```

SPEC is set to: /home/cpu2006
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sda3        ext4      1.8T  411G  1.3T  24% /

```

```

Additional information from dmidecode:
BIOS American Megatrends Inc. 067 08/13/2014
Memory:
 16x 16 GB
 8x NO DIMM NO DIMM
 16x Samsung M393A2G40DB0-CPB 16 GB 2133 MHz 2 rank

```

(End of data from sysinfo program)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Sugon**

**SPECfp2006 = 105**

**Sugon I620-G20 (Intel Xeon E5-2660 v3)**

**SPECfp\_base2006 = 102**

**CPU2006 license:** 9046

**Test date:** Oct-2014

**Test sponsor:** Sugon

**Hardware Availability:** Sep-2014

**Tested by:** Sugon

**Software Availability:** Sep-2013

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,1,0"

LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

OMP\_NUM\_THREADS = "20"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Submitted\_by: Tian Yuwan <tianyw@sugon.com>

Submitted: Wed Nov 5 02:52:29 EST 2014

Submission: cpu2006-20141105-32755.sub

Submitted\_by: Tian Yuwan <tianyw@sugon.com>

Submitted: Sun Nov 23 21:26:15 EST 2014

Submission: cpu2006-20141105-32755.sub

Submitted\_by: Tian Yuwan <tianyw@sugon.com>

Submitted: Wed Nov 26 05:11:52 EST 2014

Submission: cpu2006-20141105-32755.sub

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECfp2006 = 105

Sugon I620-G20 (Intel Xeon E5-2660 v3)

SPECfp\_base2006 = 102

CPU2006 license: 9046

Test date: Oct-2014

Test sponsor: Sugon

Hardware Availability: Sep-2014

Tested by: Sugon

Software Availability: Sep-2013

## Base Portability Flags (Continued)

```

436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

```

## Peak Compiler Invocation

C benchmarks:

```

icc -m64

```

C++ benchmarks:

```

icpc -m64

```

Fortran benchmarks:

```

ifort -m64

```

Benchmarks using both Fortran and C:

```

icc -m64 ifort -m64

```



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECfp2006 = 105

Sugon I620-G20 (Intel Xeon E5-2660 v3)

SPECfp\_base2006 = 102

CPU2006 license: 9046

Test date: Oct-2014

Test sponsor: Sugon

Hardware Availability: Sep-2014

Tested by: Sugon

Software Availability: Sep-2013

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32 -ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
-parallel

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-inline-calloc -opt-malloc-options=3 -auto -unroll4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Sugon

SPECfp2006 = 105

Sugon I620-G20 (Intel Xeon E5-2660 v3)

SPECfp\_base2006 = 102

CPU2006 license: 9046

Test date: Oct-2014

Test sponsor: Sugon

Hardware Availability: Sep-2014

Tested by: Sugon

Software Availability: Sep-2013

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.html>

<http://www.spec.org/cpu2006/flags/Sugon-Platform-Settings-V1.2-HSW-revA.20141203.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.xml>

<http://www.spec.org/cpu2006/flags/Sugon-Platform-Settings-V1.2-HSW-revA.20141203.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Dec 3 10:28:33 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 2 December 2014.