SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei CH242 v3 (E7-4809 v2)

SPECint®_rate2006 = 638

SPECint_rate_base2006 = 615

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Oct-2014
Hardware Availability: Feb-2014
Software Availability: Nov-2013

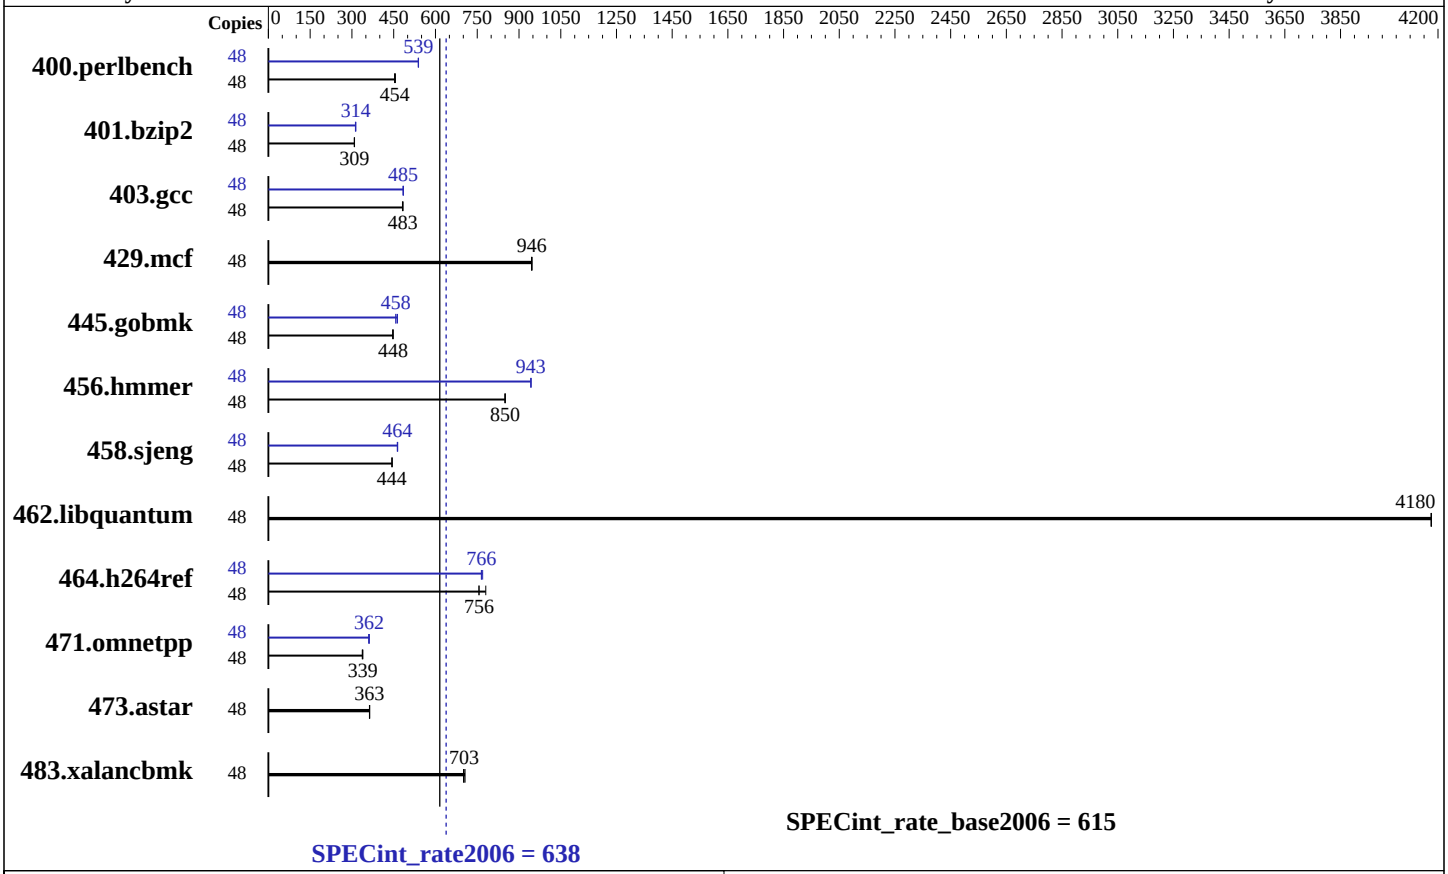

Hardware

CPU Name:	Intel Xeon E7-4809 v2
CPU Characteristics:	
CPU MHz:	1900
FPU:	Integrated
CPU(s) enabled:	24 cores, 4 chips, 6 cores/chip, 2 threads/core
CPU(s) orderable:	2,4 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	12 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (32 x 8 GB 2Rx4 PC3L-12800R-11, ECC, running at 1066 MHz)
Disk Subsystem:	1 X 300 GB SATA 7200RPM
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 6.5 (Santiago) 2.6.32-431.el6.x86_64
Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei CH242 v3 (E7-4809 v2)

SPECint_rate2006 = 638

SPECint_rate_base2006 = 615

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Oct-2014
Hardware Availability: Feb-2014
Software Availability: Nov-2013

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	48	**1032**	**454**	1035	453	1028	456	48	870	539	871	538	**870**	**539**
401.bzip2	48	1501	309	**1499**	**309**	1497	309	48	**1477**	**314**	1476	314	1482	313
403.gcc	48	802	482	799	483	**800**	**483**	48	**797**	**485**	799	483	797	485
429.mcf	48	462	947	463	945	**463**	**946**	48	462	947	463	945	**463**	**946**
445.gobmk	48	1128	446	**1125**	**448**	1124	448	48	**1099**	**458**	1100	458	1086	464
456.hmmer	48	526	851	**527**	**850**	527	849	48	475	943	**475**	**943**	475	942
458.sjeng	48	1306	445	1309	444	**1309**	**444**	48	1251	464	1255	463	**1253**	**464**
462.libquantum	48	238	4180	238	4180	**238**	**4180**	48	238	4180	238	4180	**238**	**4180**
464.h264ref	48	1405	756	**1404**	**756**	1361	781	48	1389	765	1380	769	**1387**	**766**
471.omnetpp	48	885	339	**886**	**339**	890	337	48	828	362	833	360	**829**	**362**
473.astar	48	929	363	926	364	**928**	**363**	48	929	363	926	364	**928**	**363**
483.xalancbmk	48	**471**	**703**	473	701	469	706	48	**471**	**703**	473	701	469	706

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS configuration:
Set VMSE LockStep mode disable
Sysinfo program /spec14/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on localhost.localdomain Fri Oct 31 16:11:51 2014

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E7-4809 v2 @ 1.90GHz
      4 "physical id"s (chips)
      48 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
```

Continued on next page

Platform Notes (Continued)

```
        cpu cores : 6
        siblings  : 12
        physical 0: cores 0 1 2 3 4 5
        physical 1: cores 0 1 2 3 4 5
        physical 2: cores 0 1 2 3 4 5
        physical 3: cores 0 1 2 3 4 5
     cache size : 12288 KB

  From /proc/meminfo
     MemTotal:       264357008 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  /usr/bin/lsb_release -d
     Red Hat Enterprise Linux Server release 6.5 (Santiago)

  From /etc/*release* /etc/*version*
     redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
     system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
     system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

  uname -a:
     Linux localhost.localdomain 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54
     EST 2013 x86_64 x86_64 x86_64 GNU/Linux

  run-level 3 Oct 31 16:05

  SPEC is set to: /spec14
     Filesystem     Type  Size  Used Avail Use% Mounted on
     /dev/sda2      ext4  255G  139G  104G  58% /

  Additional information from dmidecode:
    BIOS American Megatrends Inc. BLISV302 09/03/2014
    Memory:
     32x   8 GB
     32x Micron 36KSF1G72PZ-1G6K1 8 GB 1066 MHz 2 rank

  (End of data from sysinfo program)
   The system use 256 GB memory
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/spec14/libs/32:/spec14/libs/64:/spec14/sh"

 Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
 memory using RedHat EL 6.4
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
```

Continued on next page

General Notes (Continued)

```
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
```
icc  -m32
```

C++ benchmarks:
```
icpc -m32
```

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
```

C++ benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/sh -lsmartheap
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
```
icc  -m32
```

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

Continued on next page

Peak Compiler Invocation (Continued)

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:
icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

Continued on next page

Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/sh -lsmartheap`

473.astar: `basepeak = yes`

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html
http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml
http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Dec 3 10:28:50 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 December 2014.