



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECfp®_rate2006 = 427

Sugon I620-G20 (Intel Xeon E5-2637 v3)

SPECfp_rate_base2006 = 412

CPU2006 license: 9046


Test date: Oct-2014

Test sponsor: Sugon

Hardware Availability: Sep-2014

Tested by: Sugon

Software Availability: Nov-2013

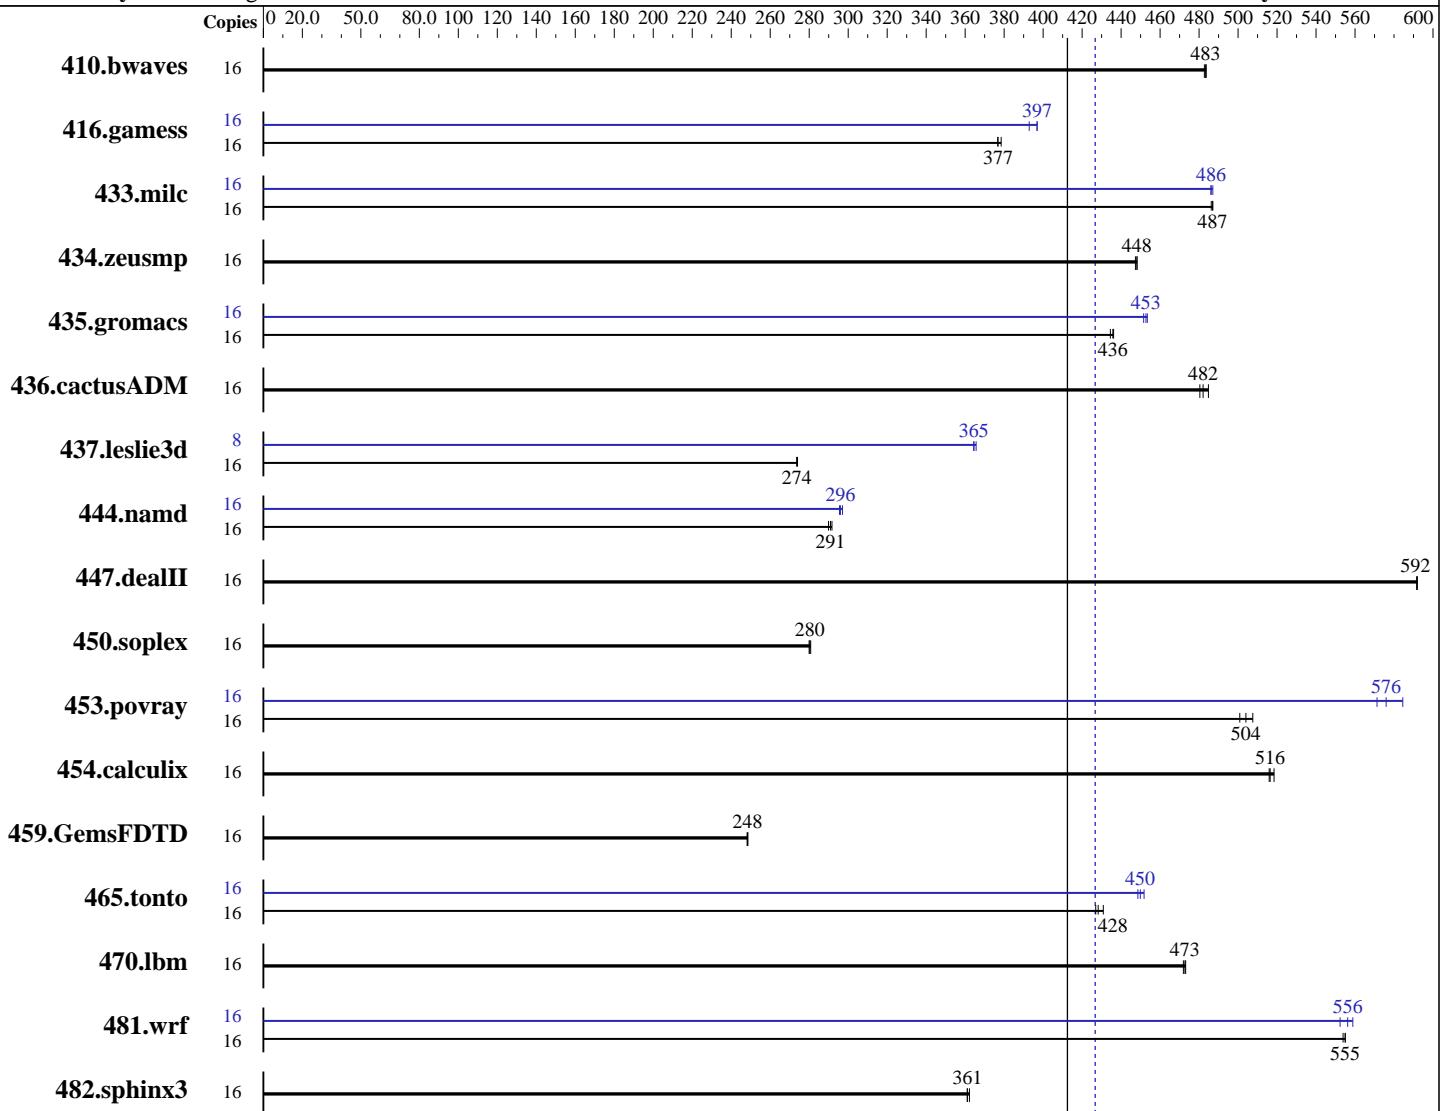

SPECfp_rate_base2006 = 412

SPECfp_rate2006 = 427

Hardware

CPU Name: Intel Xeon E5-2637 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz
 CPU MHz: 3500
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)
 Compiler: 2.6.32-431.el6.x86_64
 C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECfp_rate2006 = 427

Sugon I620-G20 (Intel Xeon E5-2637 v3)

SPECfp_rate_base2006 = 412

CPU2006 license: 9046

Test date: Oct-2014

Test sponsor: Sugon

Hardware Availability: Sep-2014

Tested by: Sugon

Software Availability: Nov-2013

L3 Cache: 15 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)
 Disk Subsystem: 1 x 2.0 TB SATA 7200 RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	450	483	450	484	450	483	16	450	483	450	484	450	483
416.gamess	16	831	377	832	377	828	378	16	797	393	789	397	789	397
433.milc	16	302	487	302	487	302	486	16	302	486	302	486	302	487
434.zeusmp	16	325	447	325	448	325	448	16	325	447	325	448	325	448
435.gromacs	16	262	436	262	436	263	434	16	252	453	253	452	252	453
436.cactusADM	16	397	482	398	480	394	485	16	397	482	398	480	394	485
437.leslie3d	16	549	274	550	274	549	274	8	206	366	206	364	206	365
444.namd	16	441	291	440	292	443	290	16	432	297	433	296	434	296
447.dealII	16	309	592	309	592	309	592	16	309	592	309	592	309	592
450.soplex	16	476	280	475	281	477	280	16	476	280	475	281	477	280
453.povray	16	168	508	170	501	169	504	16	146	585	149	571	148	576
454.calculix	16	256	516	256	516	255	518	16	256	516	256	516	255	518
459.GemsFDTD	16	683	249	683	248	684	248	16	683	249	683	248	684	248
465.tonto	16	368	428	365	431	369	427	16	350	450	351	449	348	452
470.lbm	16	465	473	465	473	466	472	16	465	473	465	473	466	472
481.wrf	16	322	555	322	555	323	554	16	321	556	324	552	320	559
482.sphinx3	16	861	362	864	361	864	361	16	861	362	864	361	864	361

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Enforce POR set to disabled
 DDR Speed set to 2133
 Early Snoop set to disabled

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECfp_rate2006 = 427

Sugon I620-G20 (Intel Xeon E5-2637 v3)

SPECfp_rate_base2006 = 412

CPU2006 license: 9046

Test date: Oct-2014

Test sponsor: Sugon

Hardware Availability: Sep-2014

Tested by: Sugon

Software Availability: Nov-2013

Platform Notes (Continued)

```
COD set to enable
Power Technology set to performance
Sysinfo program /home/cpu2006/config/sysinfo.rev6874
$Rev: 6874 $ $Date:: 2013-11-20 ## 654bd3fcf53b06faef0efe54ed011998
running on localhost Sat Oct 11 12:16:09 2014
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2637 v3 @ 3.50GHz
        2 "physical id"s (chips)
        16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
        cpu cores : 4
        siblings : 8
        physical 0: cores 0 1 4 5
        physical 1: cores 0 1 4 5
cache size : 15360 KB
```

```
From /proc/meminfo
MemTotal:      264481468 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.5 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux localhost 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Oct 11 02:10
```

```
SPEC is set to: /home/cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3        ext4  1.8T  459G  1.3T  27% /
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECfp_rate2006 = 427

Sugon I620-G20 (Intel Xeon E5-2637 v3)

SPECfp_rate_base2006 = 412

CPU2006 license: 9046

Test date: Oct-2014

Test sponsor: Sugon

Hardware Availability: Sep-2014

Tested by: Sugon

Software Availability: Nov-2013

Platform Notes (Continued)

BIOS American Megatrends Inc. 068 08/15/2014

Memory:

16x Hynix Semiconductor HMA42GR7MFR4N-TFTD 16 GB 2 rank 2133 MHz
8x NO DIMM NO DIMM

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Submitted_by: Tian Yuwan <tianyw@sugon.com>

Submitted: Sun Nov 23 21:26:15 EST 2014

Submission: cpu2006-20141107-32774.sub

Submitted_by: Tian Yuwan <tianyw@sugon.com>

Submitted: Wed Nov 26 05:11:52 EST 2014

Submission: cpu2006-20141107-32774.sub

Submitted_by: Tian Yuwan <tianyw@sugon.com>

Submitted: Thu Nov 27 00:57:34 EST 2014

Submission: cpu2006-20141107-32774.sub

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECfp_rate2006 = 427

Sugon I620-G20 (Intel Xeon E5-2637 v3)

SPECfp_rate_base2006 = 412

CPU2006 license: 9046

Test date: Oct-2014

Test sponsor: Sugon

Hardware Availability: Sep-2014

Tested by: Sugon

Software Availability: Nov-2013

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECfp_rate2006 = 427

Sugon I620-G20 (Intel Xeon E5-2637 v3)

SPECfp_rate_base2006 = 412

CPU2006 license: 9046

Test date: Oct-2014

Test sponsor: Sugon

Hardware Availability: Sep-2014

Tested by: Sugon

Software Availability: Nov-2013

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div(pass 2)
           -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
           -auto-ilp32
```

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```
444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div(pass 2)
           -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
           -auto-ilp32
```

447.dealII: basepeak = yes

450.soplex: basepeak = yes

```
453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2)
            -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll14
            -ansi-alias
```

Fortran benchmarks:

410.bwaves: basepeak = yes

```
416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
             -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll12
             -inline-level=0 -scalar-rep-
```

434.zeusmp: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECfp_rate2006 = 427

Sugon I620-G20 (Intel Xeon E5-2637 v3)

SPECfp_rate_base2006 = 412

CPU2006 license: 9046

Test date: Oct-2014

Test sponsor: Sugon

Hardware Availability: Sep-2014

Tested by: Sugon

Software Availability: Nov-2013

Peak Optimization Flags (Continued)

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll14
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.html>

<http://www.spec.org/cpu2006/flags/Sugon-Platform-Settings-V1.2-HSW-revA.20141203.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.xml>

<http://www.spec.org/cpu2006/flags/Sugon-Platform-Settings-V1.2-HSW-revA.20141203.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Dec 3 10:28:49 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 2 December 2014.