



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECfp<sup>®</sup>2006 = 74.7

IBM System x iDataPlex dx360 M4  
(Intel Xeon E5-2628L v2, 1.90 GHz)

SPECfp\_base2006 = 71.4

CPU2006 license: 9017


Test date: Nov-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Dec-2013

Tested by: IBM Corporation

Software Availability: Sep-2013

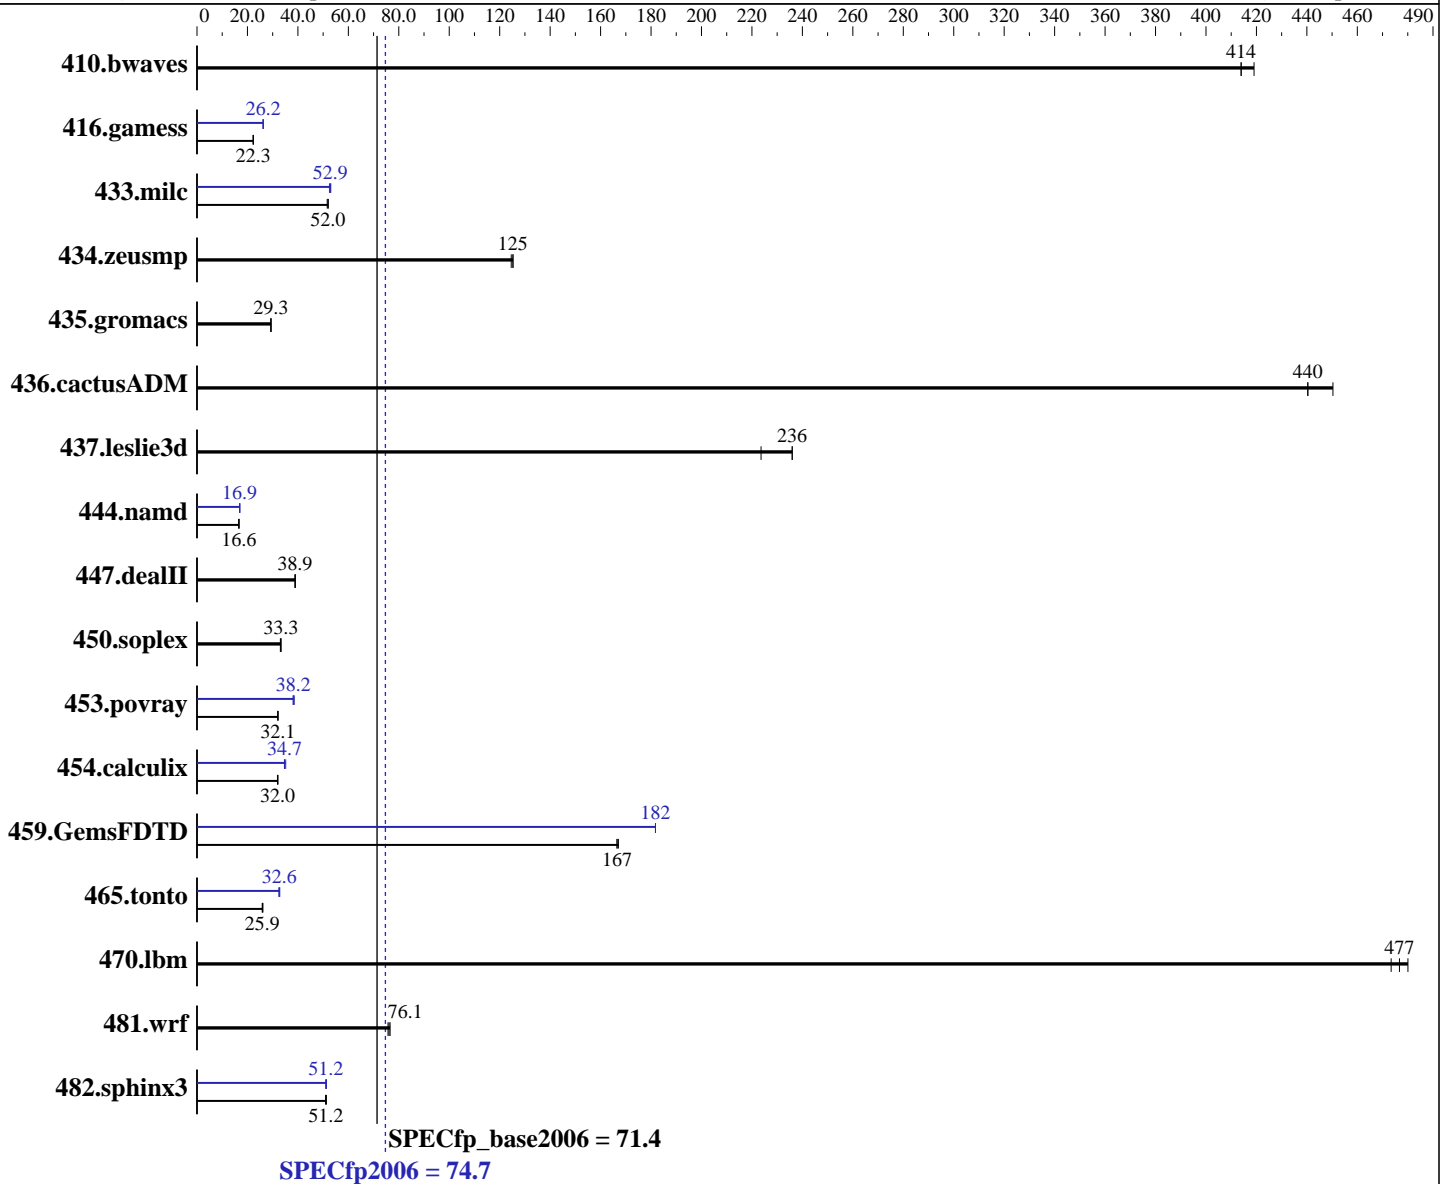

### Hardware

CPU Name: Intel Xeon E5-2628L v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.40 GHz  
 CPU MHz: 1900  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
 2.6.32-358.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECfp2006 = **74.7**

IBM System x iDataPlex dx360 M4  
(Intel Xeon E5-2628L v2, 1.90 GHz)

SPECfp\_base2006 = **71.4**

CPU2006 license: 9017

Test date: Nov-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Dec-2013

Tested by: IBM Corporation

Software Availability: Sep-2013

L3 Cache: 20 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC, running at 1600 MHz)  
Disk Subsystem: 1 x 500 GB SATA, 7200 RPM  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	<b><u>32.8</u></b>	<b><u>414</u></b>	32.8	414	32.4	419	<b><u>32.8</u></b>	<b><u>414</u></b>	32.8	414	32.4	419
416.gamess	877	22.3	<b><u>878</u></b>	<b><u>22.3</u></b>	879	22.3	746	26.3	747	26.2	<b><u>746</u></b>	<b><u>26.2</u></b>
433.milc	177	52.0	<b><u>177</u></b>	<b><u>52.0</u></b>	178	51.6	175	52.5	<b><u>174</u></b>	<b><u>52.9</u></b>	173	53.0
434.zeusmp	72.6	125	<b><u>72.6</u></b>	<b><u>125</u></b>	73.0	125	72.6	125	<b><u>72.6</u></b>	<b><u>125</u></b>	73.0	125
435.gromacs	243	29.3	<b><u>244</u></b>	<b><u>29.3</u></b>	244	29.3	243	29.3	<b><u>244</u></b>	<b><u>29.3</u></b>	244	29.3
436.cactusADM	27.1	440	26.5	450	<b><u>27.1</u></b>	<b><u>440</u></b>	27.1	440	26.5	450	<b><u>27.1</u></b>	<b><u>440</u></b>
437.leslie3d	39.8	236	<b><u>39.8</u></b>	<b><u>236</u></b>	42.0	224	39.8	236	<b><u>39.8</u></b>	<b><u>236</u></b>	42.0	224
444.namd	481	16.7	<b><u>482</u></b>	<b><u>16.6</u></b>	485	16.5	472	17.0	<b><u>474</u></b>	<b><u>16.9</u></b>	474	16.9
447.dealII	294	38.9	<b><u>294</u></b>	<b><u>38.9</u></b>	294	38.9	294	38.9	<b><u>294</u></b>	<b><u>38.9</u></b>	294	38.9
450.soplex	252	33.1	<b><u>251</u></b>	<b><u>33.3</u></b>	251	33.3	252	33.1	<b><u>251</u></b>	<b><u>33.3</u></b>	251	33.3
453.povray	166	32.1	<b><u>166</u></b>	<b><u>32.1</u></b>	166	32.0	<b><u>139</u></b>	<b><u>38.2</u></b>	138	38.6	139	38.2
454.calculix	259	31.9	257	32.1	<b><u>258</u></b>	<b><u>32.0</u></b>	238	34.7	<b><u>238</u></b>	<b><u>34.7</u></b>	235	35.2
459.GemsFDTD	63.5	167	<b><u>63.7</u></b>	<b><u>167</u></b>	63.7	167	58.4	182	<b><u>58.4</u></b>	<b><u>182</u></b>	58.4	182
465.tonto	380	25.9	<b><u>379</u></b>	<b><u>25.9</u></b>	376	26.1	300	32.8	303	32.5	<b><u>302</u></b>	<b><u>32.6</u></b>
470.lbm	28.6	480	29.0	473	<b><u>28.8</u></b>	<b><u>477</u></b>	28.6	480	29.0	473	<b><u>28.8</u></b>	<b><u>477</u></b>
481.wrf	146	76.6	<b><u>147</u></b>	<b><u>76.1</u></b>	148	75.7	146	76.6	<b><u>147</u></b>	<b><u>76.1</u></b>	148	75.7
482.sphinx3	<b><u>381</u></b>	<b><u>51.2</u></b>	380	51.3	382	51.0	<b><u>381</u></b>	<b><u>51.2</u></b>	382	51.0	380	51.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Zone reclaim mode enabled with:
echo 1 > /proc/sys/vm/zone_reclaim_mode
Intel Idle Driver disabled with the following Linux kernel parameter in /etc/grub.conf:
intel_idle.max_cstate=0
```

## Platform Notes

```
BIOS setting:
Operating Mode set to Maximum Performance
Sysinfo program /home/SPECcpu-20140116-ic14.0/config/sysinfo.rev6874
$Rev: 6874 $ $Date:: 2013-11-20 #$ 654bd3fcf53b06faef0efe54ed011998
running on dx360M4 Sun Nov 2 20:39:03 2014
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECfp2006 = 74.7

IBM System x iDataPlex dx360 M4  
(Intel Xeon E5-2628L v2, 1.90 GHz)

SPECfp\_base2006 = 71.4

CPU2006 license: 9017

Test date: Nov-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Dec-2013

Tested by: IBM Corporation

Software Availability: Sep-2013

### Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
model name      : Intel(R) Xeon(R) CPU E5-2628L v2 @ 1.90GHz
 2 "physical id"s (chips)
 32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores      : 8
  siblings       : 16
  physical 0:    : cores 0 1 2 3 4 5 6 7
  physical 1:    : cores 0 1 2 3 4 5 6 7
cache size      : 20480 KB

```

```

From /proc/meminfo
MemTotal:      264641468 kB
HugePages_Total: 0
Hugepagesize:  2048 kB

```

```

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)

```

```

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

```

```

uname -a:
Linux dx360M4 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013
x86_64 x86_64 x86_64 GNU/Linux

```

```
run-level 3 Oct 31 12:31
```

```

SPEC is set to: /home/SPECcpu-20140116-ic14.0
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/mapper/vg_td2-lv_home
                ext4      380G  174G  187G  49% /home

```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS IBM -[TDE139OUS-1.50]- 02/21/2014

Memory:

16x Samsung M393B2G70QH0-CMA 16 GB 2 rank 1866 MHz, configured at 1600 MHz

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = 74.7

IBM System x iDataPlex dx360 M4  
(Intel Xeon E5-2628L v2, 1.90 GHz)

SPECfp\_base2006 = 71.4

CPU2006 license: 9017

Test date: Nov-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Dec-2013

Tested by: IBM Corporation

Software Availability: Sep-2013

## Platform Notes (Continued)

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,1,0"

LD\_LIBRARY\_PATH = "/home/SPECcpu-20140116-ic14.0/libs/32:/home/SPECcpu-20140116-ic14.0/libs/64:/home/SPECcpu-20140116-ic14.0/sh"

OMP\_NUM\_THREADS = "16"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB  
memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = 74.7

IBM System x iDataPlex dx360 M4  
(Intel Xeon E5-2628L v2, 1.90 GHz)

SPECfp\_base2006 = 71.4

CPU2006 license: 9017

Test date: Nov-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Dec-2013

Tested by: IBM Corporation

Software Availability: Sep-2013

## Base Portability Flags (Continued)

470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias  
C++ benchmarks:  
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias  
Fortran benchmarks:  
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch  
Benchmarks using both Fortran and C:  
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

## Peak Compiler Invocation

C benchmarks:  
icc -m64  
C++ benchmarks:  
icpc -m64  
Fortran benchmarks:  
ifort -m64  
Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:  
433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32  
-ansi-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = 74.7

IBM System x iDataPlex dx360 M4  
(Intel Xeon E5-2628L v2, 1.90 GHz)

SPECfp\_base2006 = 71.4

CPU2006 license: 9017

Test date: Nov-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Dec-2013

Tested by: IBM Corporation

Software Availability: Sep-2013

## Peak Optimization Flags (Continued)

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
-parallel

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Lenovo Group Limited**

**SPECfp2006 = 74.7**

IBM System x iDataPlex dx360 M4  
(Intel Xeon E5-2628L v2, 1.90 GHz)

**SPECfp\_base2006 = 71.4**

**CPU2006 license:** 9017

**Test date:** Nov-2014

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Dec-2013

**Tested by:** IBM Corporation

**Software Availability:** Sep-2013

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-C.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-C.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Wed Dec 3 10:29:53 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 2 December 2014.