



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint[®]_rate2006 = 247

IBM NeXtScale nx360 M4
(Intel Xeon E5-2609 v2, 2.50 GHz)

SPECint_rate_base2006 = 239

CPU2006 license: 9017


Test date: Nov-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Nov-2013

Tested by: IBM Corporation

Software Availability: Sep-2013

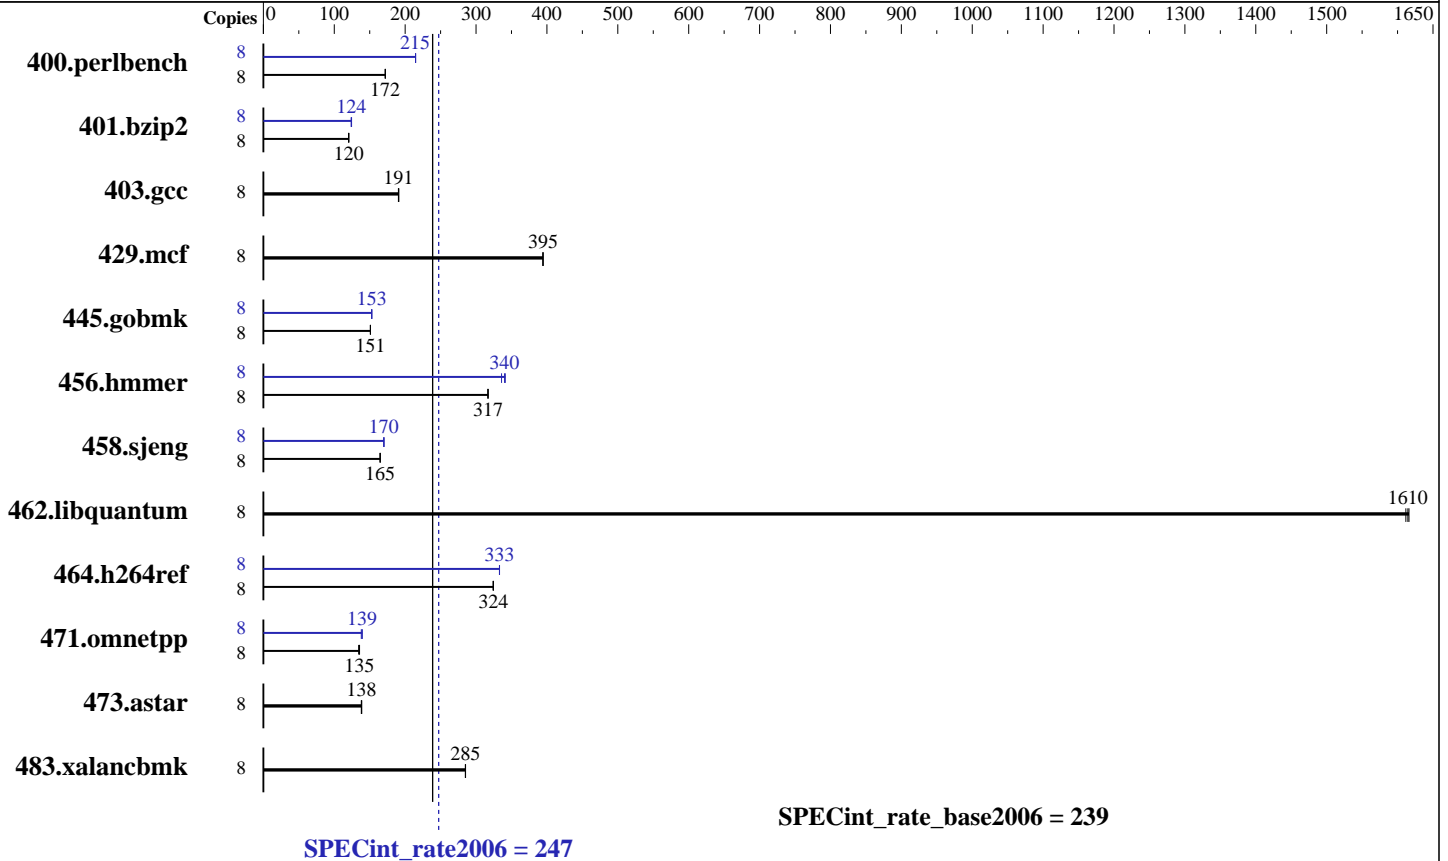

Hardware

CPU Name: Intel Xeon E5-2609 v2
 CPU Characteristics:
 CPU MHz: 2500
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 10 MB I+D on chip per chip
 Other Cache: None
 Memory: 128 GB (8 x 16 GB 2Rx4 PC3-14900R-13, ECC, running at 1333 MHz)
 Disk Subsystem: 2 x 250 GB SATA, 7200RPM, RAID 0
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)
 2.6.32-358.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint_rate2006 = 247

IBM NeXtScale nx360 M4
(Intel Xeon E5-2609 v2, 2.50 GHz)

SPECint_rate_base2006 = 239

CPU2006 license: 9017

Test date: Nov-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Nov-2013

Tested by: IBM Corporation

Software Availability: Sep-2013

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	454	172	454	172	455	172	8	364	215	364	215	364	215
401.bzip2	8	641	120	643	120	640	121	8	621	124	622	124	623	124
403.gcc	8	338	190	338	191	337	191	8	338	190	338	191	337	191
429.mcf	8	185	394	185	395	185	395	8	185	394	185	395	185	395
445.gobmk	8	556	151	556	151	556	151	8	549	153	549	153	549	153
456.hammer	8	235	317	236	317	236	317	8	219	341	219	340	222	336
458.sjeng	8	588	165	587	165	587	165	8	570	170	569	170	569	170
462.libquantum	8	103	1620	103	1610	103	1610	8	103	1620	103	1610	103	1610
464.h264ref	8	546	324	546	324	545	325	8	532	333	531	333	532	333
471.omnetpp	8	372	134	369	135	369	136	8	359	139	362	138	359	139
473.astar	8	405	139	406	138	406	138	8	405	139	406	138	406	138
483.xalancbmk	8	194	285	194	285	194	285	8	194	285	194	285	194	285

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Zone reclaim mode enabled with:
echo 1 > /proc/sys/vm/zone_reclaim_mode
Intel Idle Driver disabled with the following Linux kernel parameter in /etc/grub.conf:
intel_idle.max_cstate=0

Platform Notes

BIOS setting:
Operating Mode set to Maximum Performance
Sysinfo program /home/SPECcpu-20140116-ic14.0/config/sysinfo.rev6874
\$Rev: 6874 \$ \$Date:: 2013-11-20 #\$ 654bd3fcf53b06faef0efe54ed011998
running on nx360M4 Sun Nov 2 10:55:20 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2609 v2 @ 2.50GHz
2 "physical id"s (chips)

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint_rate2006 = 247

IBM NeXtScale nx360 M4
(Intel Xeon E5-2609 v2, 2.50 GHz)

SPECint_rate_base2006 = 239

CPU2006 license: 9017

Test date: Nov-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Nov-2013

Tested by: IBM Corporation

Software Availability: Sep-2013

Platform Notes (Continued)

```

8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 4
  siblings  : 4
  physical 0: cores 0 1 2 3
  physical 1: cores 0 1 2 3
cache size : 10240 KB

From /proc/meminfo
MemTotal:      132091120 kB
HugePages_Total:    0
Hugepagesize:    2048 kB

/usr/bin/lsb_release -d
  Red Hat Enterprise Linux Server release 6.4 (Santiago)

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
Linux nx360M4 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013
x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Oct 31 12:28

SPEC is set to: /home/SPECcpu-20140116-ic14.0
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/mapper/vg_nx360m4-lv_home
ext4           403G    14G  370G   4% /home

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program
reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to
hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS IBM -[FHE107NUS-1.20]- 06/03/2014
Memory:
  8x Samsung M393B2G70QH0-CMA 16 GB 2 rank 1866 MHz, configured at 1333 MHz

(End of data from sysinfo program)

```

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/SPECcpu-20140116-ic14.0/libs/32:/home/SPECcpu-20140116-ic14.0/libs/64:/home/SPECcpu-20140116-ic14.0/sh"

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint_rate2006 = 247

IBM NeXtScale nx360 M4
(Intel Xeon E5-2609 v2, 2.50 GHz)

SPECint_rate_base2006 = 239

CPU2006 license: 9017

Test date: Nov-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Nov-2013

Tested by: IBM Corporation

Software Availability: Sep-2013

General Notes (Continued)

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:
icc -m32

C++ benchmarks:
icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/sh -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint_rate2006 = 247

IBM NeXtScale nx360 M4
(Intel Xeon E5-2609 v2, 2.50 GHz)

SPECint_rate_base2006 = 239

CPU2006 license: 9017

Test date: Nov-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Nov-2013

Tested by: IBM Corporation

Software Availability: Sep-2013

Peak Compiler Invocation (Continued)

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

401.bzip2: -DSPEC_CPU_LP64

456.hmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint_rate2006 = 247

IBM NeXtScale nx360 M4
(Intel Xeon E5-2609 v2, 2.50 GHz)

SPECint_rate_base2006 = 239

CPU2006 license: 9017

Test date: Nov-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Nov-2013

Tested by: IBM Corporation

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-C.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-C.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Dec 3 10:30:13 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 2 December 2014.