



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

IBM NeXtScale nx360 M4
(Intel Xeon E5-2628L v2, 1.90 GHz)

SPECfp®_rate2006 = 428

SPECfp_rate_base2006 = 419

CPU2006 license: 9017


Test sponsor: Lenovo Group Limited

Tested by: IBM Corporation

Test date: Nov-2014

Hardware Availability: Nov-2013

Software Availability: Sep-2013

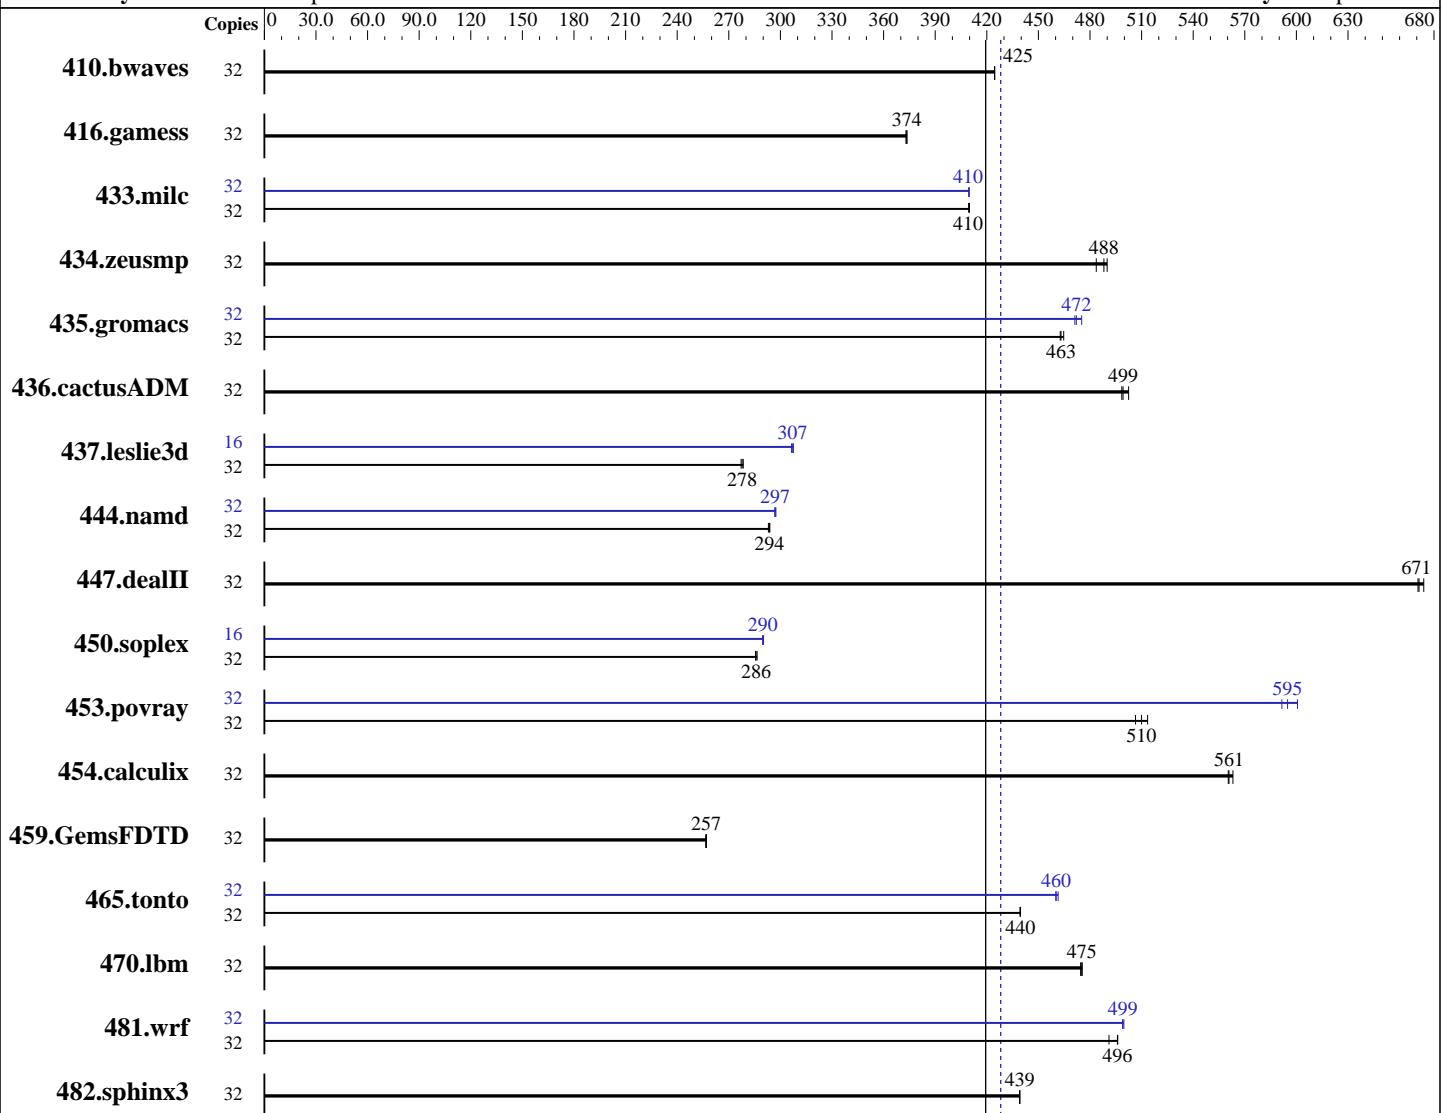

SPECfp_rate_base2006 = 419

SPECfp_rate2006 = 428

Hardware

CPU Name: Intel Xeon E5-2628L v2
CPU Characteristics: Intel Turbo Boost Technology up to 2.40 GHz
CPU MHz: 1900
FPU: Integrated
CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)
Compiler: 2.6.32-358.el6.x86_64
C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
Auto Parallel: No
File System: ext4
Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

IBM NeXtScale nx360 M4
(Intel Xeon E5-2628L v2, 1.90 GHz)

SPECfp_rate2006 = 428

SPECfp_rate_base2006 = 419

CPU2006 license: 9017

Test date: Nov-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Nov-2013

Tested by: IBM Corporation

Software Availability: Sep-2013

L3 Cache: 20 MB I+D on chip per chip
Other Cache: None
Memory: 128 GB (8 x 16 GB 2Rx4 PC3-14900R-13, ECC, running at 1600 MHz)
Disk Subsystem: 2 x 250 GB SATA, 7200RPM, RAID 0
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	1024	425	1024	425	1024	425	32	1024	425	1024	425	1024	425	1024	425
416.gamess	32	1677	374	1678	374	1680	373	32	1677	374	1678	374	1680	373		
433.milc	32	717	410	717	409	717	410	32	717	410	717	410	717	410		
434.zeusmp	32	594	490	597	488	602	484	32	594	490	597	488	602	484		
435.gromacs	32	492	465	493	463	494	463	32	481	475	485	471	484	472		
436.cactusADM	32	766	499	761	502	767	498	32	766	499	761	502	767	498		
437.leslie3d	32	1085	277	1083	278	1080	278	16	491	306	490	307	489	308		
444.namd	32	873	294	874	294	876	293	32	863	297	864	297	865	297		
447.dealII	32	543	674	545	671	546	671	32	543	674	545	671	546	671		
450.soplex	32	932	286	935	286	934	286	16	461	290	460	290	460	290		
453.povray	32	336	506	334	510	332	514	32	283	601	286	595	288	592		
454.calculix	32	471	561	469	563	471	560	32	471	561	469	563	471	560		
459.GemsFDTD	32	1323	257	1321	257	1322	257	32	1323	257	1321	257	1322	257		
465.tonto	32	717	439	716	440	716	440	32	684	460	684	460	682	461		
470.lbm	32	925	475	925	475	927	475	32	925	475	925	475	927	475		
481.wrf	32	728	491	720	496	721	496	32	715	500	716	499	716	499		
482.sphinx3	32	1420	439	1420	439	1420	439	32	1420	439	1420	439	1420	439		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Zone reclaim mode enabled with:

```
echo 1 > /proc/sys/vm/zone_reclaim_mode
```

Intel Idle Driver disabled with the following Linux kernel parameter in /etc/grub.conf:
intel_idle.max_cstate=0



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

IBM NeXtScale nx360 M4
(Intel Xeon E5-2628L v2, 1.90 GHz)

SPECfp_rate2006 = 428

SPECfp_rate_base2006 = 419

CPU2006 license: 9017

Test date: Nov-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Nov-2013

Tested by: IBM Corporation

Software Availability: Sep-2013

Platform Notes

BIOS setting:

```
Operating Mode set to Maximum Performance
Sysinfo program /home/SPECcpu-20140116-ic14.0/config/sysinfo.rev6874
$Rev: 6874 $ $Date:: 2013-11-20 #\$ 654bd3fcf53b06faef0efe54ed011998
running on nx360M4 Sat Nov 8 07:39:05 2014
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2628L v2 @ 1.90GHz
        2 "physical id"s (chips)
        32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
        cpu cores : 8
        siblings : 16
        physical 0: cores 0 1 2 3 4 5 6 7
        physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal:      132088104 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux nx360M4 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Nov 7 15:10

```
SPEC is set to: /home/SPECcpu-20140116-ic14.0
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/vg_nx360m4-lv_home
                  ext4   403G   14G  370G   4%  /home
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

IBM NeXtScale nx360 M4
(Intel Xeon E5-2628L v2, 1.90 GHz)

SPECfp_rate2006 = 428

SPECfp_rate_base2006 = 419

CPU2006 license: 9017

Test date: Nov-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Nov-2013

Tested by: IBM Corporation

Software Availability: Sep-2013

Platform Notes (Continued)

BIOS IBM -[FHE107NUS-1.20]- 06/03/2014

Memory:

8x Samsung M393B2G70QH0-CMA 16 GB 2 rank 1866 MHz, configured at 1600 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/home/SPECcpu-20140116-ic14.0/lib32:/home/SPECcpu-20140116-ic14.0/lib64:/home/SPECcpu-20140116-ic14.0/sh"
```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

IBM NeXtScale nx360 M4
(Intel Xeon E5-2628L v2, 1.90 GHz)

SPECfp_rate2006 = 428

SPECfp_rate_base2006 = 419

CPU2006 license: 9017

Test sponsor: Lenovo Group Limited

Tested by: IBM Corporation

Test date: Nov-2014

Hardware Availability: Nov-2013

Software Availability: Sep-2013

Base Portability Flags (Continued)

```
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

450.soplex: icpc -m32

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

IBM NeXtScale nx360 M4
(Intel Xeon E5-2628L v2, 1.90 GHz)

SPECfp_rate2006 = 428

SPECfp_rate_base2006 = 419

CPU2006 license: 9017

Test sponsor: Lenovo Group Limited

Tested by: IBM Corporation

Test date: Nov-2014

Hardware Availability: Nov-2013

Software Availability: Sep-2013

Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
    434.zeusmp: -DSPEC_CPU_LP64
    435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
    437.leslie3d: -DSPEC_CPU_LP64
        444.namd: -DSPEC_CPU_LP64
        447.dealII: -DSPEC_CPU_LP64
        453.povray: -DSPEC_CPU_LP64
        454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
        481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
    -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
    -prof-use(pass 2) -auto-ilp32

```

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
    -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
    -prof-use(pass 2) -fno-alias -auto-ilp32

```

447.dealII: basepeak = yes

```

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
    -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
    -prof-use(pass 2) -opt-malloc-options=3

```

```

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
    -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
    -prof-use(pass 2) -unroll4 -ansi-alias

```

Fortran benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

IBM NeXtScale nx360 M4
(Intel Xeon E5-2628L v2, 1.90 GHz)

SPECfp_rate2006 = 428

SPECfp_rate_base2006 = 419

CPU2006 license: 9017

Test sponsor: Lenovo Group Limited

Tested by: IBM Corporation

Test date: Nov-2014

Hardware Availability: Nov-2013

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

```
410.bwaves: basepeak = yes
416.gamess: basepeak = yes
434.zeusmp: basepeak = yes
437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch
459.GemsFDTD: basepeak = yes
465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
            -inline-calloc -opt-malloc-options=3
Benchmarks using both Fortran and C:
435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
              -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
              -prof-use(pass 2) -opt-prefetch -auto-ilp32
436.cactusADM: basepeak = yes
454.calculix: basepeak = yes
481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-C.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-C.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Dec 3 10:30:12 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 December 2014.