



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp®_rate2006 = 434

PowerEdge M630 (Intel Xeon E5-2637 v3, 3.50 GHz)

SPECfp_rate_base2006 = 420

CPU2006 license: 55


Test date: Oct-2014

Test sponsor: Dell Inc.

Hardware Availability: Dec-2014

Tested by: Dell Inc.

Software Availability: Jan-2014

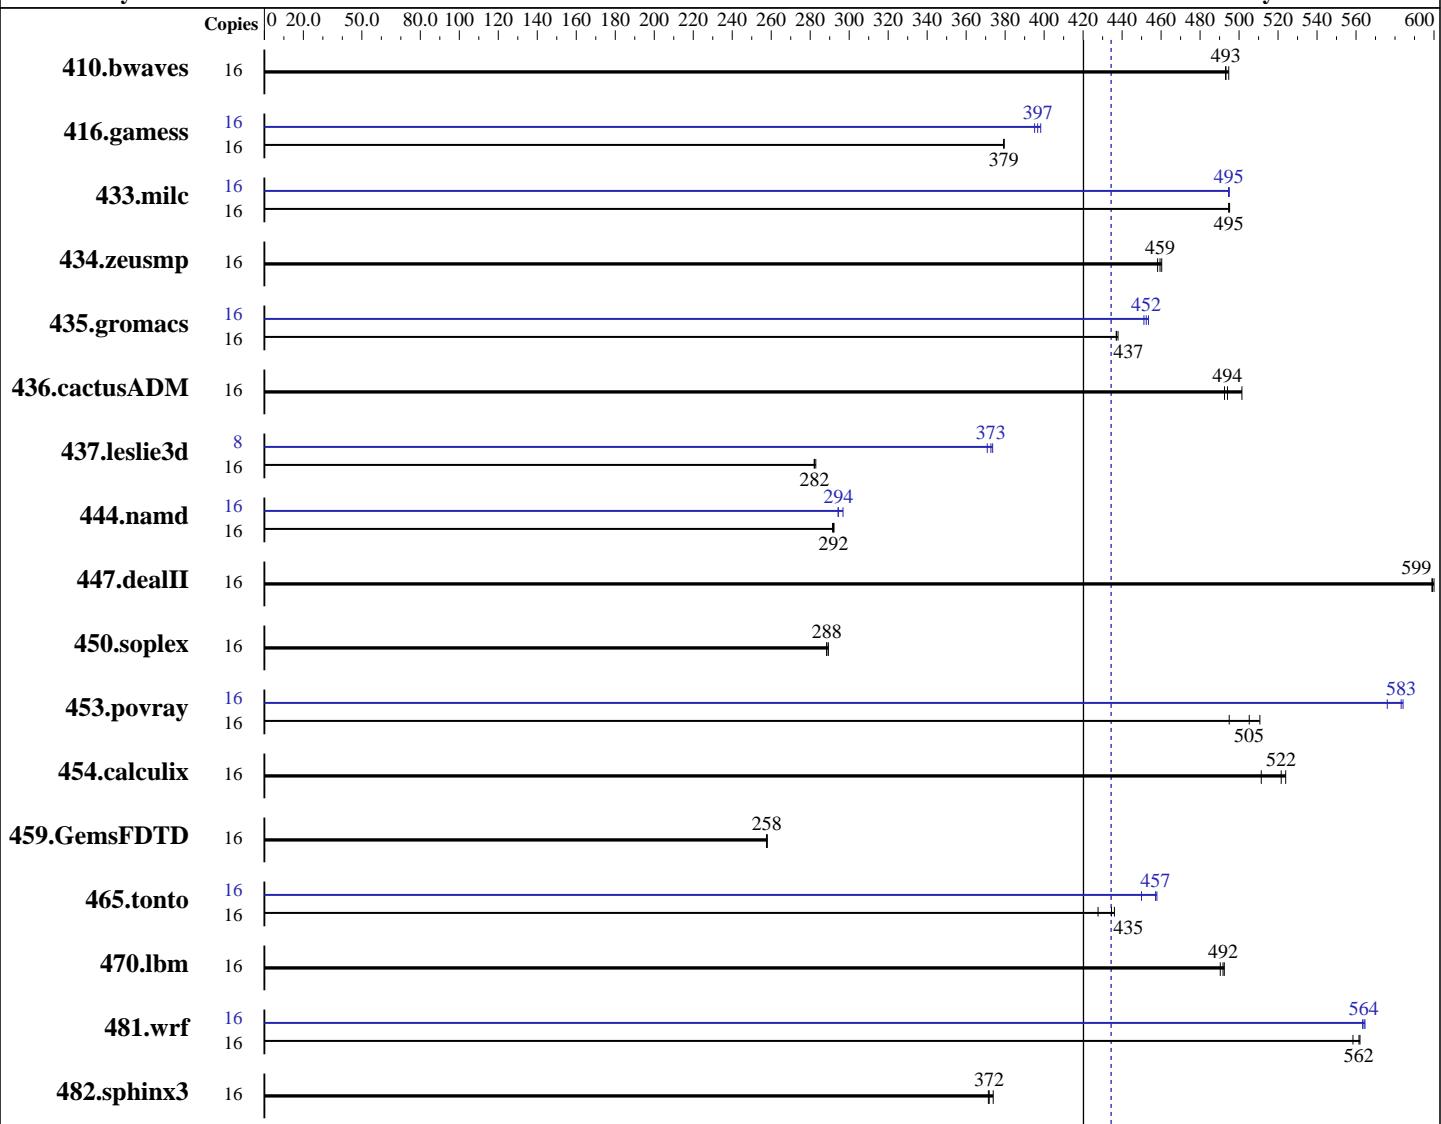

SPECfp_rate_base2006 = 420

SPECfp_rate2006 = 434

Hardware

CPU Name: Intel Xeon E5-2637 v3
CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz
CPU MHz: 3500
FPU: Integrated
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core
CPU(s) orderable: 1,2 chip
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)
Compiler: 2.6.32-431.el6.x86_64
C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
Auto Parallel: No
File System: ext4
Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 434

PowerEdge M630 (Intel Xeon E5-2637 v3, 3.50 GHz)

SPECfp_rate_base2006 = 420

CPU2006 license: 55

Test date: Oct-2014

Test sponsor: Dell Inc.

Hardware Availability: Dec-2014

Tested by: Dell Inc.

Software Availability: Jan-2014

L3 Cache: 15 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)
 Disk Subsystem: 1 x 1.6 TB SAS SSD
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	441	493	440	495	441	493	16	441	493	440	495	441	493
416.gamess	16	826	379	826	379	826	379	16	787	398	793	395	790	397
433.milc	16	297	495	297	495	297	495	16	297	495	297	495	297	495
434.zeusmp	16	318	458	317	459	316	460	16	318	458	317	459	316	460
435.gromacs	16	261	437	261	438	261	437	16	253	452	252	454	253	451
436.cactusADM	16	381	501	388	493	387	494	16	381	501	388	493	387	494
437.leslie3d	16	532	283	533	282	533	282	8	202	373	201	374	203	371
444.namd	16	440	291	440	292	439	292	16	432	297	436	294	436	294
447.dealII	16	305	600	305	599	306	599	16	305	600	305	599	306	599
450.soplex	16	461	289	463	288	463	288	16	461	289	463	288	463	288
453.povray	16	167	511	168	505	172	495	16	146	584	148	576	146	583
454.calculix	16	252	524	258	511	253	522	16	252	524	258	511	253	522
459.GemsFDTD	16	658	258	658	258	659	258	16	658	258	658	258	659	258
465.tonto	16	368	428	362	435	361	436	16	344	458	344	457	350	450
470.lbm	16	447	492	448	490	446	492	16	447	492	448	490	446	492
481.wrf	16	318	562	318	562	320	558	16	317	564	317	563	317	565
482.sphinx3	16	839	372	834	374	840	371	16	839	372	834	374	840	371

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS settings:
 Snoop Mode set to Cluster on Die
 Virtualization Technology disabled

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 434

PowerEdge M630 (Intel Xeon E5-2637 v3, 3.50 GHz)

SPECfp_rate_base2006 = 420

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Oct-2014

Hardware Availability: Dec-2014

Software Availability: Jan-2014

Platform Notes (Continued)

```
Execute Disable disabled
System Profile set to Custom
Memory Patrol Scrub set to Disabled
Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6818
$Rev: 6818 $ $Date::: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on localhost.localdomain Tue Oct 28 08:53:20 2014
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2637 v3 @ 3.50GHz
        2 "physical id"s (chips)
        16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
        cpu cores : 4
        siblings : 8
        physical 0: cores 0 1 4 5
        physical 1: cores 0 1 4 5
cache size : 15360 KB
```

```
From /proc/meminfo
MemTotal:      264437524 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.5 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux localhost.localdomain 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54
EST 2013 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Oct 28 00:19
```

```
SPEC is set to: /root/cpu2006-1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        ext4  1.5T  9.7G  1.4T   1%  /
```

Additional information from dmidecode:

BIOS Dell Inc. 1.0.1 10/15/2014

Memory:

8x 000000000000 Not Specified 2133 MHz 1 rank
16x 00AD00B300AD HMA42GR7MFR4N-TFTD 16 GB 2133 MHz 2 rank

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M630 (Intel Xeon E5-2637 v3, 3.50 GHz)

SPECfp_rate2006 = 434

SPECfp_rate_base2006 = 420

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Oct-2014

Hardware Availability: Dec-2014

Software Availability: Jan-2014

Platform Notes (Continued)

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M630 (Intel Xeon E5-2637 v3, 3.50 GHz)

SPECfp_rate2006 = 434

SPECfp_rate_base2006 = 420

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Oct-2014

Hardware Availability: Dec-2014

Software Availability: Jan-2014

Base Portability Flags (Continued)

```
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Peak Portability Flags

Same as Base Portability Flags



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M630 (Intel Xeon E5-2637 v3, 3.50 GHz)

SPECfp_rate2006 = 434

SPECfp_rate_base2006 = 420

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Oct-2014

Hardware Availability: Dec-2014

Software Availability: Jan-2014

Peak Optimization Flags

C benchmarks:

```
433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div(pass 2)
           -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
           -auto-ilp32
```

```
470.lbm: basepeak = yes
```

```
482.sphinx3: basepeak = yes
```

C++ benchmarks:

```
444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div(pass 2)
           -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
           -auto-ilp32
```

```
447.dealII: basepeak = yes
```

```
450.soplex: basepeak = yes
```

```
453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2)
            -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll14
            -ansi-alias
```

Fortran benchmarks:

```
410.bwaves: basepeak = yes
```

```
416.games: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll12
            -inline-level=0 -scalar-rep-
```

```
434.zeusmp: basepeak = yes
```

```
437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
```

```
459.GemsFDTD: basepeak = yes
```

```
465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll14
            -auto -inline-calloc -opt-malloc-options=3
```

Benchmarks using both Fortran and C:

```
435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2)
              -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
              -opt-prefetch -auto-ilp32
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M630 (Intel Xeon E5-2637 v3, 3.50 GHz)

SPECfp_rate2006 = 434

SPECfp_rate_base2006 = 420

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Oct-2014

Hardware Availability: Dec-2014

Software Availability: Jan-2014

Peak Optimization Flags (Continued)

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revE.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Dec 3 10:32:19 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 2 December 2014.