



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Sugon

SPECfp®\_rate2006 = 750

Sugon I620-G20 (Intel Xeon E5-2685 v3)

SPECfp\_rate\_base2006 = 737

CPU2006 license: 9046


Test date: Nov-2014

Test sponsor: Sugon

Hardware Availability: Sep-2014

Tested by: Sugon

Software Availability: Nov-2013

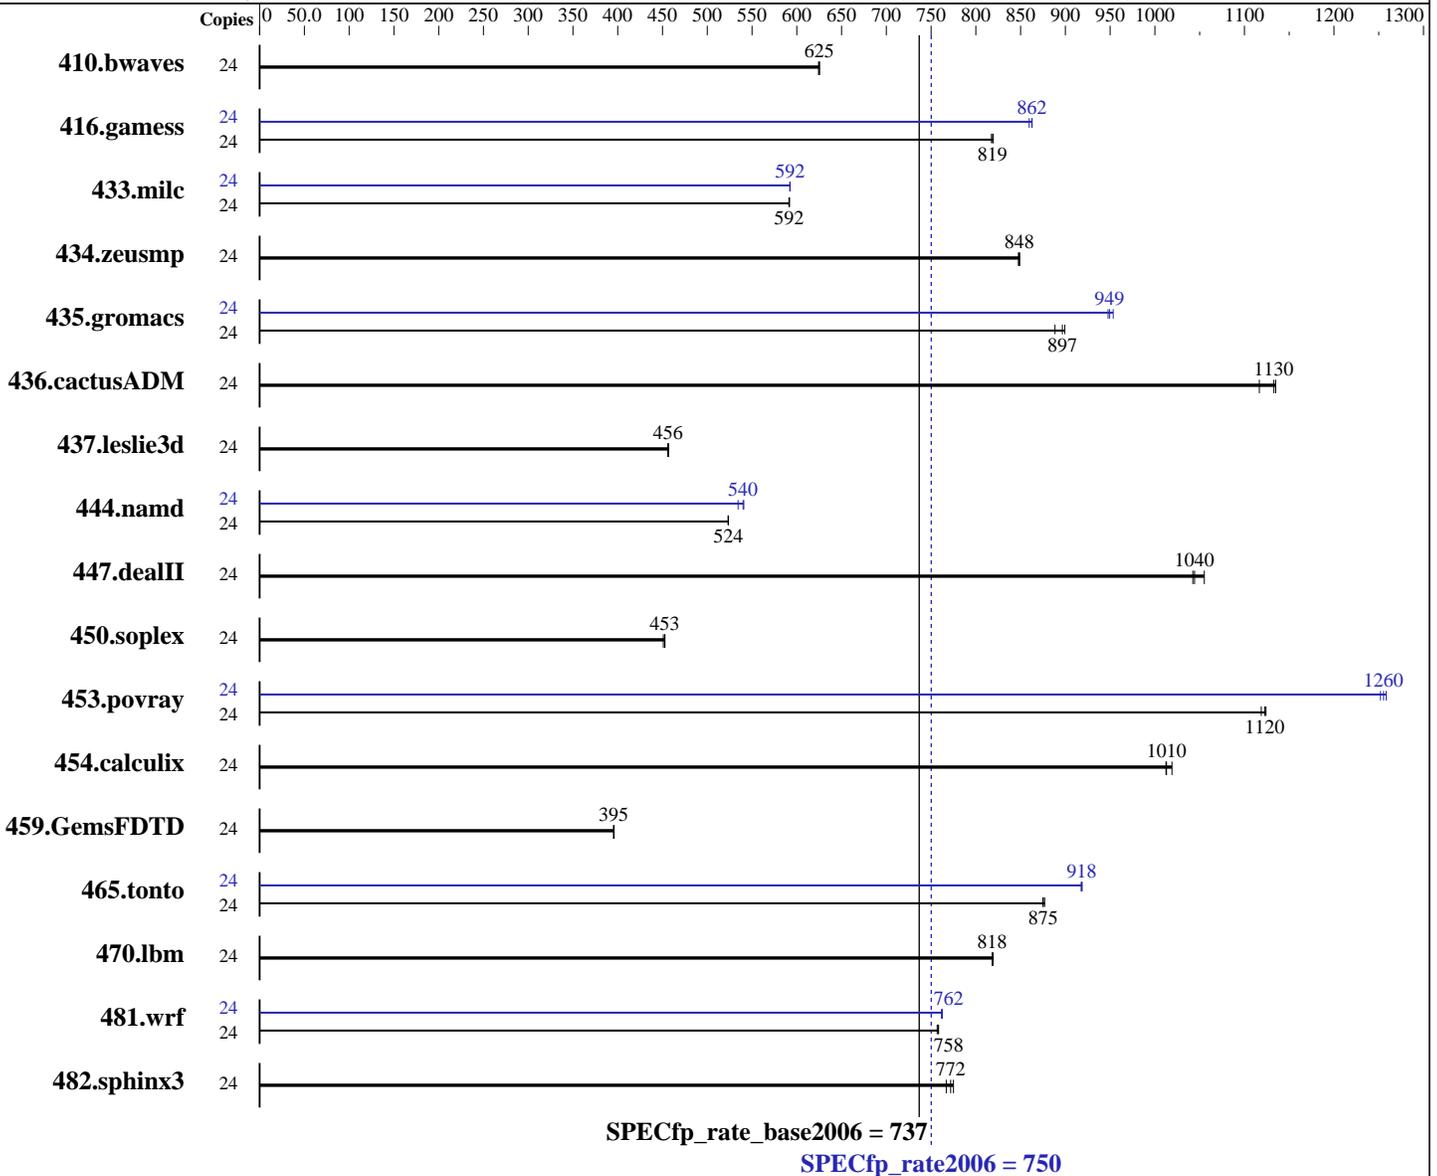

### Hardware

CPU Name: Intel Xeon E5-2685 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
 2.6.32-431.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Sugon

SPECfp\_rate2006 = **750**

Sugon I620-G20 (Intel Xeon E5-2685 v3)

SPECfp\_rate\_base2006 = **737**

CPU2006 license: 9046

Test date: Nov-2014

Test sponsor: Sugon

Hardware Availability: Sep-2014

Tested by: Sugon

Software Availability: Nov-2013

L3 Cache: 30 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)  
 Disk Subsystem: 1 x 2.0 TB SATA 7200 RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	522	624	522	625	<u>522</u>	<u>625</u>	24	522	624	522	625	<u>522</u>	<u>625</u>
416.gamess	24	573	819	<u>574</u>	<u>819</u>	575	817	24	<u>545</u>	<u>862</u>	547	860	545	863
433.milc	24	373	591	<u>372</u>	<u>592</u>	372	592	24	<u>372</u>	<u>592</u>	372	593	372	592
434.zeusmp	24	<u>257</u>	<u>848</u>	258	848	257	849	24	<u>257</u>	<u>848</u>	258	848	257	849
435.gromacs	24	<u>191</u>	<u>897</u>	191	899	193	888	24	<u>180</u>	<u>949</u>	181	948	180	953
436.cactusADM	24	<u>253</u>	<u>1130</u>	257	1120	253	1130	24	<u>253</u>	<u>1130</u>	257	1120	253	1130
437.leslie3d	24	494	457	495	456	<u>494</u>	<u>456</u>	24	494	457	495	456	<u>494</u>	<u>456</u>
444.namd	24	<u>368</u>	<u>524</u>	368	524	368	523	24	<u>356</u>	<u>540</u>	356	541	360	534
447.dealII	24	260	1060	<u>263</u>	<u>1040</u>	263	1040	24	260	1060	<u>263</u>	<u>1040</u>	263	1040
450.soplex	24	442	453	<u>442</u>	<u>453</u>	444	451	24	442	453	<u>442</u>	<u>453</u>	444	451
453.povray	24	<u>114</u>	<u>1120</u>	114	1120	114	1120	24	101	1260	<u>102</u>	<u>1260</u>	102	1250
454.calculix	24	<u>195</u>	<u>1010</u>	196	1010	194	1020	24	<u>195</u>	<u>1010</u>	196	1010	194	1020
459.GemsFDTD	24	644	395	<u>644</u>	<u>395</u>	643	396	24	644	395	<u>644</u>	<u>395</u>	643	396
465.tonto	24	269	877	270	875	<u>270</u>	<u>875</u>	24	257	918	<u>257</u>	<u>918</u>	257	919
470.lbm	24	<u>403</u>	<u>818</u>	403	818	402	819	24	<u>403</u>	<u>818</u>	403	818	402	819
481.wrf	24	353	758	354	757	<u>354</u>	<u>758</u>	24	352	763	352	762	<u>352</u>	<u>762</u>
482.sphinx3	24	604	775	<u>606</u>	<u>772</u>	610	767	24	604	775	<u>606</u>	<u>772</u>	610	767

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Configuration:  
Enforce POR set to disabled  
DDR Speed set to 2133

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECfp\_rate2006 = 750

Sugon I620-G20 (Intel Xeon E5-2685 v3)

SPECfp\_rate\_base2006 = 737

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Nov-2014

Hardware Availability: Sep-2014

Software Availability: Nov-2013

## Platform Notes (Continued)

Early Snoop set to disabled

COD set to enable

Power Technology set to performance

Sysinfo program /home/cpu2006/config/sysinfo.rev6874

\$Rev: 6874 \$ \$Date:: 2013-11-20 #\$ 654bd3fcf53b06faef0efe54ed011998

running on localhost Mon Nov 17 20:53:01 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2685 v3 @ 2.60GHz

2 "physical id"s (chips)

24 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 12

siblings : 12

physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13

physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13

cache size : 15360 KB

From /proc/meminfo

MemTotal: 264479860 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

/usr/bin/lsb\_release -d

Red Hat Enterprise Linux Server release 6.5 (Santiago)

From /etc/\*release\* /etc/\*version\*

redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)

system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)

system-release-cpe: cpe:/o:redhat:enterprise\_linux:6server:ga:server

uname -a:

Linux localhost 2.6.32-431.el6.x86\_64 #1 SMP Sun Nov 10 22:19:54 EST 2013

x86\_64 x86\_64 x86\_64 GNU/Linux

run-level 3 Nov 17 13:53

SPEC is set to: /home/cpu2006

Filesystem Type Size Used Avail Use% Mounted on

/dev/sda3 ext4 1.8T 81G 1.7T 5% /

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECfp\_rate2006 = 750

Sugon I620-G20 (Intel Xeon E5-2685 v3)

SPECfp\_rate\_base2006 = 737

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Nov-2014

Hardware Availability: Sep-2014

Software Availability: Nov-2013

## Platform Notes (Continued)

BIOS American Megatrends Inc. 068 08/15/2014

Memory:

16x Hynix Semiconductor HMA42GR7MFR4N-TFTD 16 GB 2 rank 2133 MHz

8x NO DIMM NO DIMM

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Submitted\_by: Tian Yuwan <tianyw@sugon.com>

Submitted: Mon Nov 24 19:24:05 EST 2014

Submission: cpu2006-20141117-33041.sub

Submitted\_by: Tian Yuwan <tianyw@sugon.com>

Submitted: Wed Nov 26 05:11:52 EST 2014

Submission: cpu2006-20141117-33041.sub

Submitted\_by: Tian Yuwan <tianyw@sugon.com>

Submitted: Thu Nov 27 00:57:34 EST 2014

Submission: cpu2006-20141117-33041.sub

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Sugon

SPECfp\_rate2006 = 750

Sugon I620-G20 (Intel Xeon E5-2685 v3)

SPECfp\_rate\_base2006 = 737

CPU2006 license: 9046

Test date: Nov-2014

Test sponsor: Sugon

Hardware Availability: Sep-2014

Tested by: Sugon

Software Availability: Nov-2013

## Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECfp\_rate2006 = 750

Sugon I620-G20 (Intel Xeon E5-2685 v3)

SPECfp\_rate\_base2006 = 737

CPU2006 license: 9046

Test date: Nov-2014

Test sponsor: Sugon

Hardware Availability: Sep-2014

Tested by: Sugon

Software Availability: Nov-2013

## Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
-auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4  
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECfp\_rate2006 = 750

Sugon I620-G20 (Intel Xeon E5-2685 v3)

SPECfp\_rate\_base2006 = 737

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Nov-2014

Hardware Availability: Sep-2014

Software Availability: Nov-2013

## Peak Optimization Flags (Continued)

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.html>

<http://www.spec.org/cpu2006/flags/Sugon-Platform-Settings-V1.2-HSW-revA.20141203.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.xml>

<http://www.spec.org/cpu2006/flags/Sugon-Platform-Settings-V1.2-HSW-revA.20141203.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Dec 3 10:33:43 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 2 December 2014.