



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint®_rate2006 = 553

Huawei RH2288A V2 (Intel Xeon E5-2650L v2)

SPECint_rate_base2006 = 534

CPU2006 license: 3175


Test date: Sep-2014

Test sponsor: Huawei

Hardware Availability: Sep-2013

Tested by: Huawei

Software Availability: Nov-2013

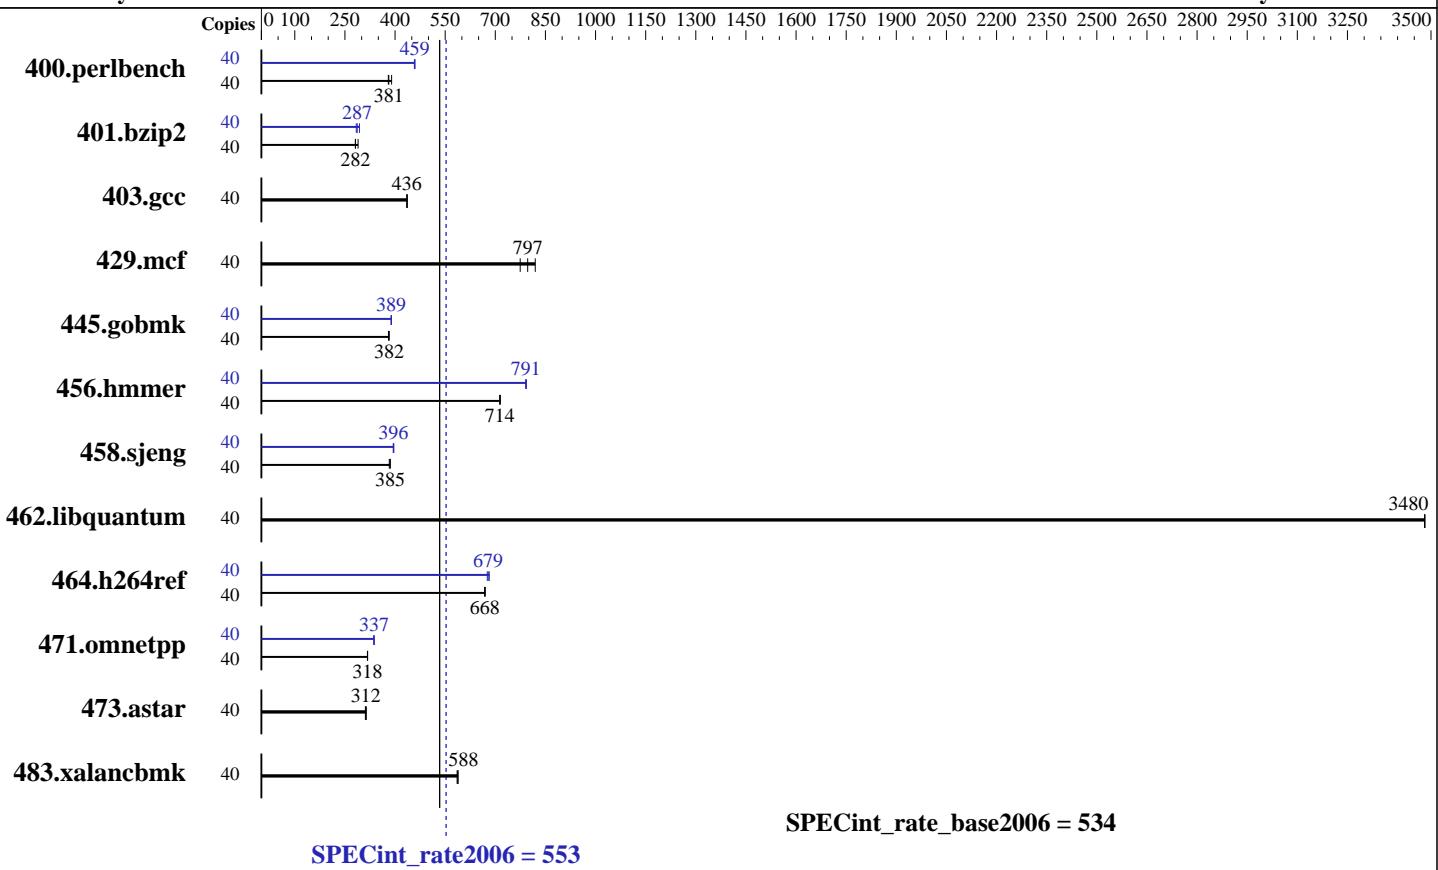

Hardware

CPU Name:	Intel Xeon E5-2650L v2
CPU Characteristics:	Intel Turbo Boost Technology up to 2.10 GHz
CPU MHz:	1700
FPU:	Integrated
CPU(s) enabled:	20 cores, 2 chips, 10 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	25 MB I+D on chip per chip
Other Cache:	None
Memory:	64 GB (8 x 8 GB 2Rx4 PC3-14900R-11, ECC, running at 1600 MHz)
Disk Subsystem:	1 x 500 GB SATA, 7200 RPM
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 6.5 (Santiago) 2.6.32-431.el6.x86_64
Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = 553

Huawei RH2288A V2 (Intel Xeon E5-2650L v2)

SPECint_rate_base2006 = 534

CPU2006 license: 3175

Test date: Sep-2014

Test sponsor: Huawei

Hardware Availability: Sep-2013

Tested by: Huawei

Software Availability: Nov-2013

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	40	1003	390	1025	381	1029	380	40	851	459	851	459	854	458
401.bzip2	40	1334	289	1373	281	1370	282	40	1315	293	1346	287	1359	284
403.gcc	40	740	435	738	436	739	436	40	740	435	738	436	739	436
429.mcf	40	458	797	471	774	445	820	40	458	797	471	774	445	820
445.gobmk	40	1098	382	1098	382	1103	380	40	1080	389	1081	388	1078	389
456.hammer	40	523	713	523	714	522	715	40	472	791	472	791	471	793
458.sjeng	40	1256	385	1265	383	1255	386	40	1227	395	1224	396	1221	396
462.libquantum	40	238	3480	238	3480	238	3480	40	238	3480	238	3480	238	3480
464.h264ref	40	1324	668	1324	668	1322	670	40	1298	682	1309	676	1304	679
471.omnetpp	40	787	318	786	318	788	317	40	743	336	742	337	741	337
473.astar	40	895	314	899	312	902	311	40	895	314	899	312	902	311
483.xalancbmk	40	469	589	470	588	471	586	40	469	589	470	588	471	586

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:

Set Power Efficiency Mode to Custom

Baseboard Management Controller used to adjust the fan speed to 100%

Sysinfo program /spec/config/sysinfo.rev6818

\$Rev: 6818 \$ \$Date::: 2012-07-17 ## e86d102572650a6e4d596a3cee98f191

running on RH2288A Sat Sep 20 16:50:16 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2650L v2 @ 1.70GHz

2 "physical id"s (chips)

40 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = 553

Huawei RH2288A V2 (Intel Xeon E5-2650L v2)

SPECint_rate_base2006 = 534

CPU2006 license: 3175

Test date: Sep-2014

Test sponsor: Huawei

Hardware Availability: Sep-2013

Tested by: Huawei

Software Availability: Nov-2013

Platform Notes (Continued)

```
caution.)  
    cpu cores : 10  
    siblings   : 20  
    physical 0: cores 0 1 2 3 4 8 9 10 11 12  
    physical 1: cores 0 1 2 3 4 8 9 10 11 12  
    cache size : 25600 KB  
  
From /proc/meminfo  
MemTotal:       66118696 kB  
HugePages_Total:        0  
Hugepagesize:     2048 kB  
  
/usr/bin/lsb_release -d  
Red Hat Enterprise Linux Server release 6.5 (Santiago)  
  
From /etc/*release* /etc/*version*  
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server  
  
uname -a:  
Linux RH2288A 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013  
x86_64 x86_64 x86_64 GNU/Linux  
  
run-level 3 Sep 20 16:46  
  
SPEC is set to: /spec  
Filesystem      Type  Size  Used  Avail Use% Mounted on  
/dev/sda2        ext4  272G   25G  233G  10% /  
  
Additional information from dmidecode:  
BIOS Insyde Corp. RMIBV391 09/10/2014  
Memory:  
8x Hynix HMT41GR7AFR8C-RD 8 GB 1600 MHz 2 rank  
  
(End of data from sysinfo program)
```

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64:/spec/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

The Huawei RH2288A V2 and Huawei RH1288A V2

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei RH2288A V2 (Intel Xeon E5-2650L v2)

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

SPECint_rate2006 = 553

SPECint_rate_base2006 = 534

Test date: Sep-2014

Hardware Availability: Sep-2013

Software Availability: Nov-2013

General Notes (Continued)

are electronically equivalent.

The results have been measured on a Huawei RH2288A V2 model

Base Compiler Invocation

C benchmarks:

 icc -m32

C++ benchmarks:

 icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

 -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:

 -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
 -Wl,-z,muldefs -L/sh -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

 icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = 553

Huawei RH2288A V2 (Intel Xeon E5-2650L v2)

SPECint_rate_base2006 = 534

CPU2006 license: 3175

Test date: Sep-2014

Test sponsor: Huawei

Hardware Availability: Sep-2013

Tested by: Huawei

Software Availability: Nov-2013

Peak Compiler Invocation (Continued)

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

401.bzip2: -DSPEC_CPU_LP64

456.hmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll14 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll12 -ansi-alias

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei RH2288A V2 (Intel Xeon E5-2650L v2)

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

SPECint_rate2006 = 553

SPECint_rate_base2006 = 534

Test date: Sep-2014

Hardware Availability: Sep-2013

Software Availability: Nov-2013

Peak Optimization Flags (Continued)

C++ benchmarks:

```
471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
             -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
             -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
             -L/sh -lsmartheap
```

```
473.astar: basepeak = yes
```

```
483.xalancbmk: basepeak = yes
```

Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=__alloca
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Dec 30 16:12:09 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 30 December 2014.