



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp[®]2006 = **75.4**

Lenovo System x3250 M5
(Intel Xeon E3-1285L v3, 3.10 GHz)

SPECfp_base2006 = **74.0**

CPU2006 license: 9017


Test date: Dec-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Jul-2014

Tested by: Lenovo Group Limited

Software Availability: Nov-2013

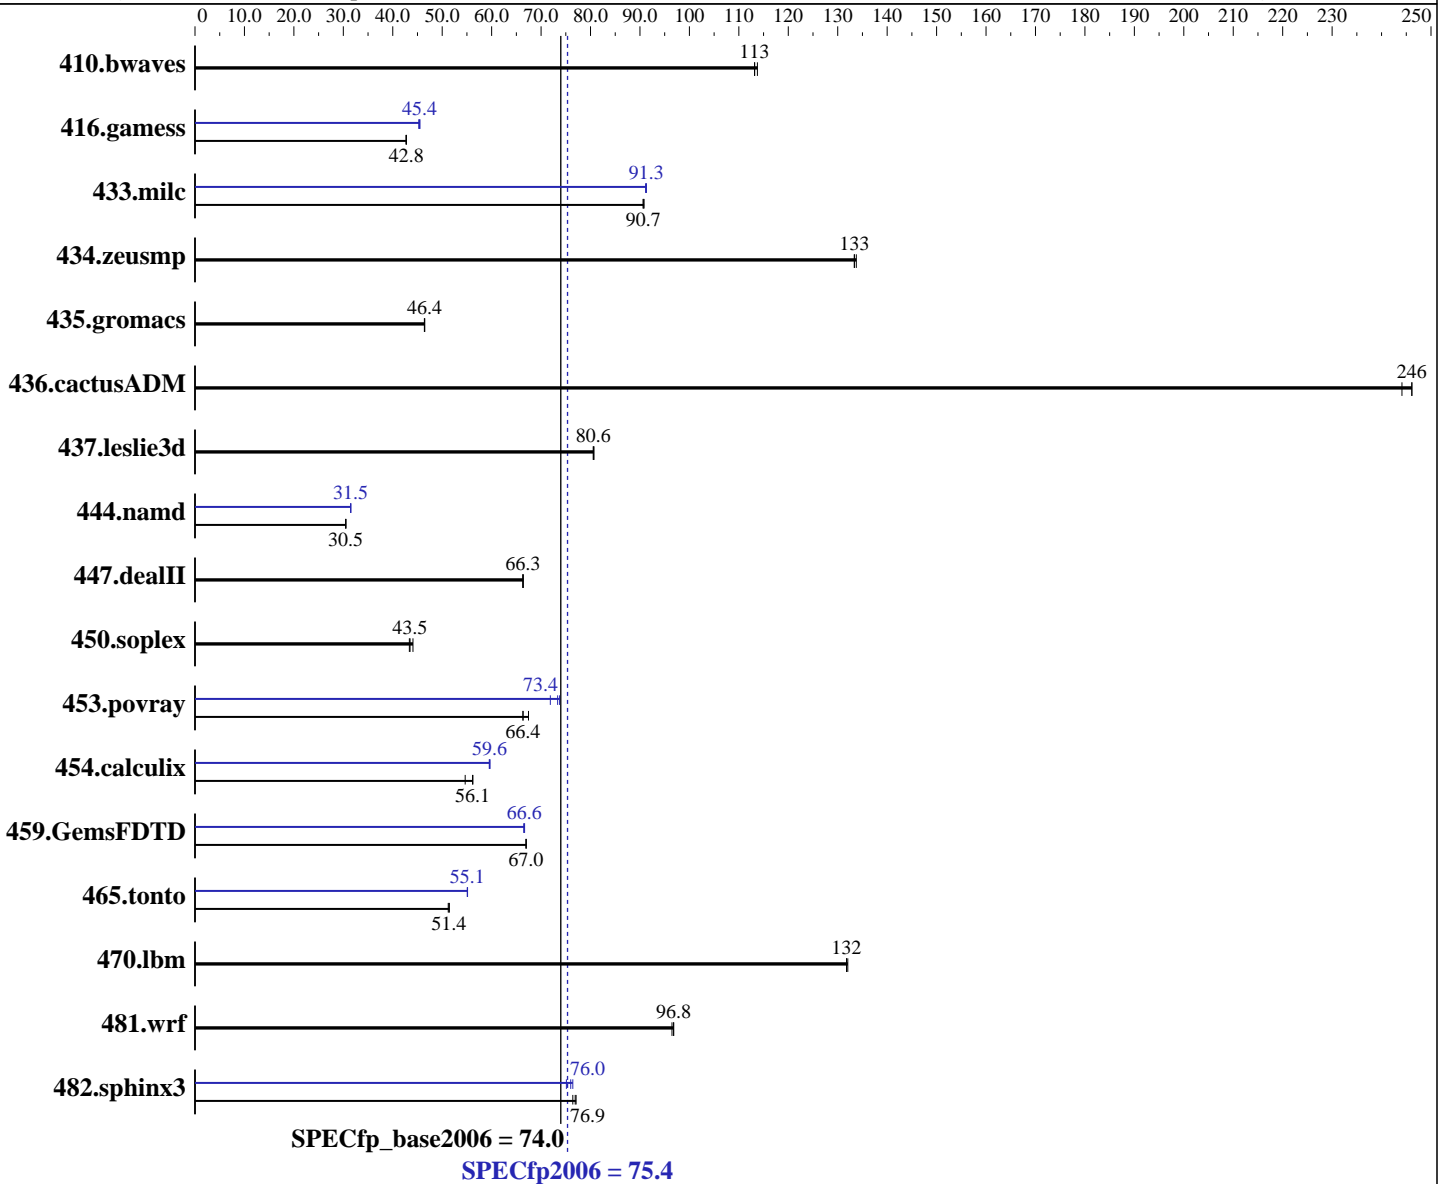

Hardware

CPU Name: Intel Xeon E3-1285L v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.90 GHz
 CPU MHz: 3100
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)
 2.6.32-431.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = **75.4**

Lenovo System x3250 M5
(Intel Xeon E3-1285L v3, 3.10 GHz)

SPECfp_base2006 = **74.0**

CPU2006 license: 9017

Test date: Dec-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Jul-2014

Tested by: Lenovo Group Limited

Software Availability: Nov-2013

L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 16 GB (4 x 4 GB 2Rx8 PC3-12800U-13)
Disk Subsystem: 1 x 1000 GB SATA, 7200 RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	120	113	120	113	119	114	120	113	120	113	119	114
416.gamess	458	42.8	459	42.7	458	42.8	433	45.3	431	45.4	430	45.5
433.milc	101	90.8	101	90.7	101	90.7	101	91.3	101	91.1	101	91.3
434.zeusmp	68.2	133	68.2	133	68.0	134	68.2	133	68.2	133	68.0	134
435.gromacs	154	46.4	154	46.4	154	46.5	154	46.4	154	46.4	154	46.5
436.cactusADM	49.0	244	48.6	246	48.5	246	49.0	244	48.6	246	48.5	246
437.leslie3d	117	80.6	117	80.6	116	80.7	117	80.6	117	80.6	116	80.7
444.namd	263	30.5	263	30.5	263	30.5	255	31.5	255	31.5	255	31.5
447.dealII	173	66.3	172	66.3	172	66.4	173	66.3	172	66.3	172	66.4
450.soplex	192	43.4	192	43.5	189	44.1	192	43.4	192	43.5	189	44.1
453.povray	80.2	66.3	78.9	67.5	80.2	66.4	72.1	73.7	72.5	73.4	74.0	71.9
454.calculix	151	54.6	147	56.2	147	56.1	139	59.5	138	59.7	138	59.6
459.GemsFDTD	158	67.0	158	67.0	158	67.0	159	66.7	160	66.5	159	66.6
465.tonto	192	51.2	192	51.4	191	51.4	179	55.1	178	55.1	179	55.1
470.lbm	104	132	104	132	104	132	104	132	104	132	104	132
481.wrf	115	96.8	116	96.5	115	96.8	115	96.8	116	96.5	115	96.8
482.sphinx3	253	76.9	255	76.4	253	77.1	255	76.4	256	76.0	259	75.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS setting:
Operating Mode set to Maximum Performance
Sysinfo program /home/SPEC_ic14/config/sysinfo.rev6818
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191
running on localhost.localdomain Tue Dec 16 02:19:56 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = 75.4

Lenovo System x3250 M5
(Intel Xeon E3-1285L v3, 3.10 GHz)

SPECfp_base2006 = 74.0

CPU2006 license: 9017

Test date: Dec-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Jul-2014

Tested by: Lenovo Group Limited

Software Availability: Nov-2013

Platform Notes (Continued)

```

From /proc/cpuinfo
  model name : Intel(R) Xeon(R) CPU E3-1285L v3 @ 3.10GHz
    1 "physical id"s (chips)
    8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 4
  siblings  : 8
  physical 0: cores 0 1 2 3
  cache size : 8192 KB

From /proc/meminfo
MemTotal:      16165980 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

/usr/bin/lsb_release -d
  Red Hat Enterprise Linux Server release 6.5 (Santiago)

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
Linux localhost.localdomain 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54
EST 2013 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Dec 15 21:12

SPEC is set to: /home/SPEC_ic14
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/VolGroup-lv_home ext4  860G  6.6G  810G   1% /home

Additional information from dmidecode:
BIOS IBM  -[JUE115CUS-1.06]- 11/11/2014
Memory:
  4x Hynix/Hyundai HMT351U7EFR8A-PB 4 GB 1600 MHz 2 rank

(End of data from sysinfo program)

```

General Notes

Environment variables set by runspec before the start of the run:

```

KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/home/SPEC_ic14/libs/32:/home/SPEC_ic14/libs/64:/home/SPEC_ic14/sh"
OMP_NUM_THREADS = "4"

```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = 75.4

Lenovo System x3250 M5
(Intel Xeon E3-1285L v3, 3.10 GHz)

SPECfp_base2006 = 74.0

CPU2006 license: 9017

Test date: Dec-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Jul-2014

Tested by: Lenovo Group Limited

Software Availability: Nov-2013

General Notes (Continued)

Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = 75.4

Lenovo System x3250 M5
(Intel Xeon E3-1285L v3, 3.10 GHz)

SPECfp_base2006 = 74.0

CPU2006 license: 9017

Test date: Dec-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Jul-2014

Tested by: Lenovo Group Limited

Software Availability: Nov-2013

Base Optimization Flags (Continued)

C++ benchmarks:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias`

Fortran benchmarks:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch`

Benchmarks using both Fortran and C:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias`

Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32 -ansi-alias`

470.lbm: `basepeak = yes`

482.sphinx3: `-xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias
-parallel`

C++ benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = 75.4

Lenovo System x3250 M5
(Intel Xeon E3-1285L v3, 3.10 GHz)

SPECfp_base2006 = 74.0

CPU2006 license: 9017

Test date: Dec-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Jul-2014

Tested by: Lenovo Group Limited

Software Availability: Nov-2013

Peak Optimization Flags (Continued)

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-HSW-A.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-HSW-A.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3250 M5
(Intel Xeon E3-1285L v3, 3.10 GHz)

SPECfp2006 = 75.4

SPECfp_base2006 = 74.0

CPU2006 license: 9017

Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Dec-2014

Hardware Availability: Jul-2014

Software Availability: Nov-2013

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Dec 30 16:13:23 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 30 December 2014.