



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECfp®2006 = **99.2**

Lenovo System x3650 M4 HD  
(Intel Xeon E5-2670 v2, 2.50 GHz)

SPECfp\_base2006 = **94.9**

CPU2006 license: 9017


Test date: Nov-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Dec-2013

Tested by: IBM Corporation

Software Availability: Sep-2013

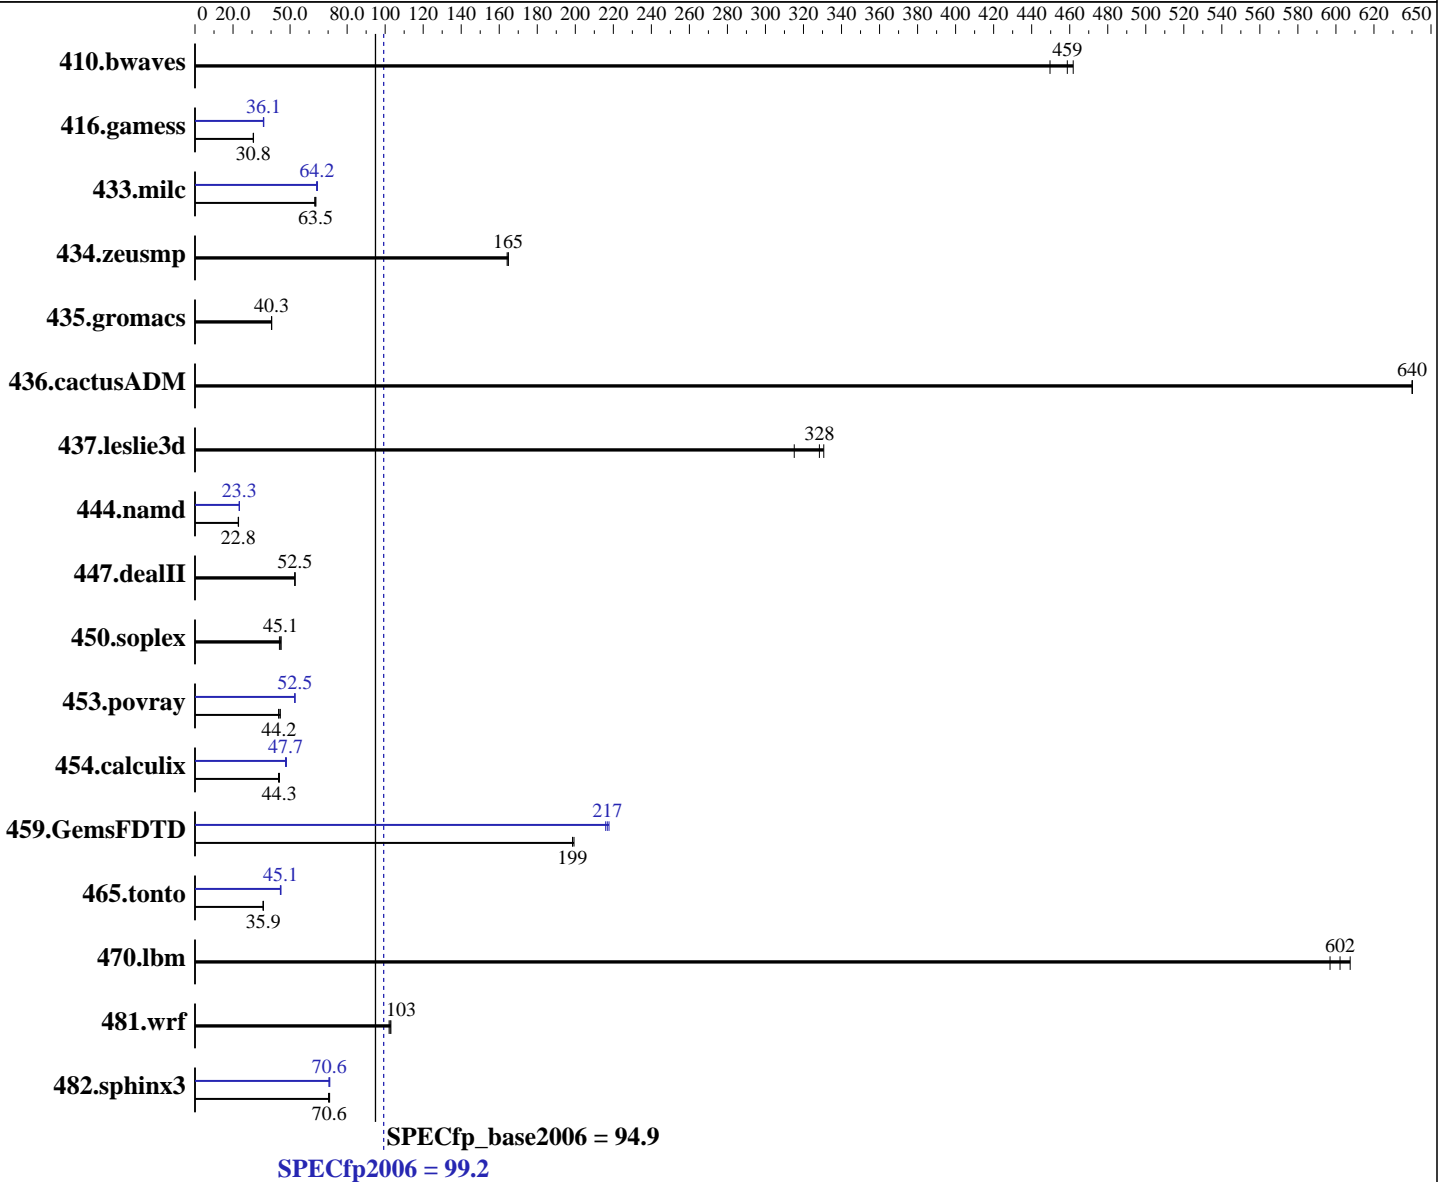

### Hardware

CPU Name: Intel Xeon E5-2670 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz  
 CPU MHz: 2500  
 FPU: Integrated  
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
 2.6.32-358.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECfp2006 = **99.2**

Lenovo System x3650 M4 HD  
(Intel Xeon E5-2670 v2, 2.50 GHz)

SPECfp\_base2006 = **94.9**

CPU2006 license: 9017

Test date: Nov-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Dec-2013

Tested by: IBM Corporation

Software Availability: Sep-2013

L3 Cache: 25 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC)  
Disk Subsystem: 1 x 400 GB SSD, RAID 0  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	29.4	462	30.2	450	<b><u>29.6</u></b>	<b><u>459</u></b>	29.4	462	30.2	450	<b><u>29.6</u></b>	<b><u>459</u></b>
416.gamess	<b><u>637</u></b>	<b><u>30.8</u></b>	636	30.8	640	30.6	541	36.2	<b><u>543</u></b>	<b><u>36.1</u></b>	545	36.0
433.milc	<b><u>145</u></b>	<b><u>63.5</u></b>	146	63.0	144	63.5	142	64.4	<b><u>143</u></b>	<b><u>64.2</u></b>	144	64.0
434.zeusmp	55.4	164	55.2	165	<b><u>55.2</u></b>	<b><u>165</u></b>	55.4	164	55.2	165	<b><u>55.2</u></b>	<b><u>165</u></b>
435.gromacs	178	40.2	177	40.3	<b><u>177</u></b>	<b><u>40.3</u></b>	178	40.2	177	40.3	<b><u>177</u></b>	<b><u>40.3</u></b>
436.cactusADM	18.7	640	<b><u>18.7</u></b>	<b><u>640</u></b>	18.7	640	18.7	640	<b><u>18.7</u></b>	<b><u>640</u></b>	18.7	640
437.leslie3d	28.4	331	29.8	315	<b><u>28.6</u></b>	<b><u>328</u></b>	28.4	331	29.8	315	<b><u>28.6</u></b>	<b><u>328</u></b>
444.namd	<b><u>352</u></b>	<b><u>22.8</u></b>	352	22.8	350	22.9	344	23.3	<b><u>344</u></b>	<b><u>23.3</u></b>	344	23.3
447.dealII	218	52.6	<b><u>218</u></b>	<b><u>52.5</u></b>	218	52.5	218	52.6	<b><u>218</u></b>	<b><u>52.5</u></b>	218	52.5
450.soplex	<b><u>185</u></b>	<b><u>45.1</u></b>	188	44.4	184	45.3	<b><u>185</u></b>	<b><u>45.1</u></b>	188	44.4	184	45.3
453.povray	119	44.9	121	43.9	<b><u>120</u></b>	<b><u>44.2</u></b>	<b><u>101</u></b>	<b><u>52.5</u></b>	101	52.5	101	52.6
454.calculix	186	44.4	<b><u>186</u></b>	<b><u>44.3</u></b>	188	43.9	173	47.6	172	48.1	<b><u>173</u></b>	<b><u>47.7</u></b>
459.GemsFDTD	<b><u>53.4</u></b>	<b><u>199</u></b>	53.4	199	53.2	199	48.7	218	49.1	216	<b><u>48.9</u></b>	<b><u>217</u></b>
465.tonto	274	36.0	275	35.8	<b><u>274</u></b>	<b><u>35.9</u></b>	218	45.2	<b><u>218</u></b>	<b><u>45.1</u></b>	219	44.9
470.lbm	22.6	607	<b><u>22.8</u></b>	<b><u>602</u></b>	23.0	597	22.6	607	<b><u>22.8</u></b>	<b><u>602</u></b>	23.0	597
481.wrf	108	103	109	102	<b><u>109</u></b>	<b><u>103</u></b>	108	103	109	102	<b><u>109</u></b>	<b><u>103</u></b>
482.sphinx3	<b><u>276</u></b>	<b><u>70.6</u></b>	275	70.8	278	70.2	<b><u>276</u></b>	<b><u>70.6</u></b>	275	70.9	276	70.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Zone reclaim mode enabled with:  
echo 1 > /proc/sys/vm/zone\_reclaim\_mode  
Intel Idle Driver disabled with the following Linux kernel parameter in /etc/grub.conf:  
intel\_idle.max\_cstate=0

## Platform Notes

BIOS setting:  
Operating Mode set to Maximum Performance  
Sysinfo program /home/SPECcpu-20140116-ic14.0/config/sysinfo.rev6874  
\$Rev: 6874 \$ \$Date:: 2013-11-20 #\$ 654bd3fcf53b06faef0efe54ed011998  
running on x3650M4HD Mon Nov 24 08:23:12 2014

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECfp2006 = 99.2

Lenovo System x3650 M4 HD  
(Intel Xeon E5-2670 v2, 2.50 GHz)

SPECfp\_base2006 = 94.9

CPU2006 license: 9017

Test date: Nov-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Dec-2013

Tested by: IBM Corporation

Software Availability: Sep-2013

### Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
model name      : Intel(R) Xeon(R) CPU E5-2670 v2 @ 2.50GHz
 2 "physical id"s (chips)
 40 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores    : 10
  siblings     : 20
  physical 0   : cores 0 1 2 3 4 8 9 10 11 12
  physical 1   : cores 0 1 2 3 4 8 9 10 11 12
cache size     : 25600 KB

```

```

From /proc/meminfo
MemTotal:      264651804 kB
HugePages_Total: 0
Hugepagesize:  2048 kB

```

```

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)

```

```

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

```

```

uname -a:
Linux x3650M4HD 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013
x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Nov 24 08:17

```

SPEC is set to: /home/SPECcpu-20140116-ic14.0
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/mapper/vg_x3650m4plus-lv_home
                ext4      309G  223G   71G   76% /home

```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS IBM -[VVE141DUS-1.73]- 07/31/2014

Memory:

8x Not Specified Not Specified  
16x Samsung M393B2G70QH0-CMA 16 GB 2 rank 1866 MHz, configured at 1867 MHz

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

**SPECfp2006 = 99.2**

Lenovo System x3650 M4 HD  
(Intel Xeon E5-2670 v2, 2.50 GHz)

**SPECfp\_base2006 = 94.9**

**CPU2006 license:** 9017

**Test date:** Nov-2014

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Dec-2013

**Tested by:** IBM Corporation

**Software Availability:** Sep-2013

## Platform Notes (Continued)

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,1,0"

LD\_LIBRARY\_PATH = "/home/SPECcpu-20140116-ic14.0/libs/32:/home/SPECcpu-20140116-ic14.0/libs/64:/home/SPECcpu-20140116-ic14.0/sh"

OMP\_NUM\_THREADS = "20"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = 99.2

Lenovo System x3650 M4 HD  
(Intel Xeon E5-2670 v2, 2.50 GHz)

SPECfp\_base2006 = 94.9

CPU2006 license: 9017

Test date: Nov-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Dec-2013

Tested by: IBM Corporation

Software Availability: Sep-2013

## Base Portability Flags (Continued)

470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

C++ benchmarks:  
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:  
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:  
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

## Peak Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:  
433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32  
-ansi-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = 99.2

Lenovo System x3650 M4 HD  
(Intel Xeon E5-2670 v2, 2.50 GHz)

SPECfp\_base2006 = 94.9

CPU2006 license: 9017

Test date: Nov-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Dec-2013

Tested by: IBM Corporation

Software Availability: Sep-2013

## Peak Optimization Flags (Continued)

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
-parallel

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Lenovo Group Limited**

**SPECfp2006 = 99.2**

Lenovo System x3650 M4 HD  
(Intel Xeon E5-2670 v2, 2.50 GHz)

**SPECfp\_base2006 = 94.9**

**CPU2006 license:** 9017

**Test date:** Nov-2014

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Dec-2013

**Tested by:** IBM Corporation

**Software Availability:** Sep-2013

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-C.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-C.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Dec 30 16:13:41 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 30 December 2014.