



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Huawei

SPECfp<sup>®</sup>2006 = **62.3**

Huawei RH2288 v2 (Intel Xeon E5-2618L v2)

SPECfp\_base2006 = **60.1**

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Dec-2014

Hardware Availability: Sep-2013

Software Availability: Sep-2014

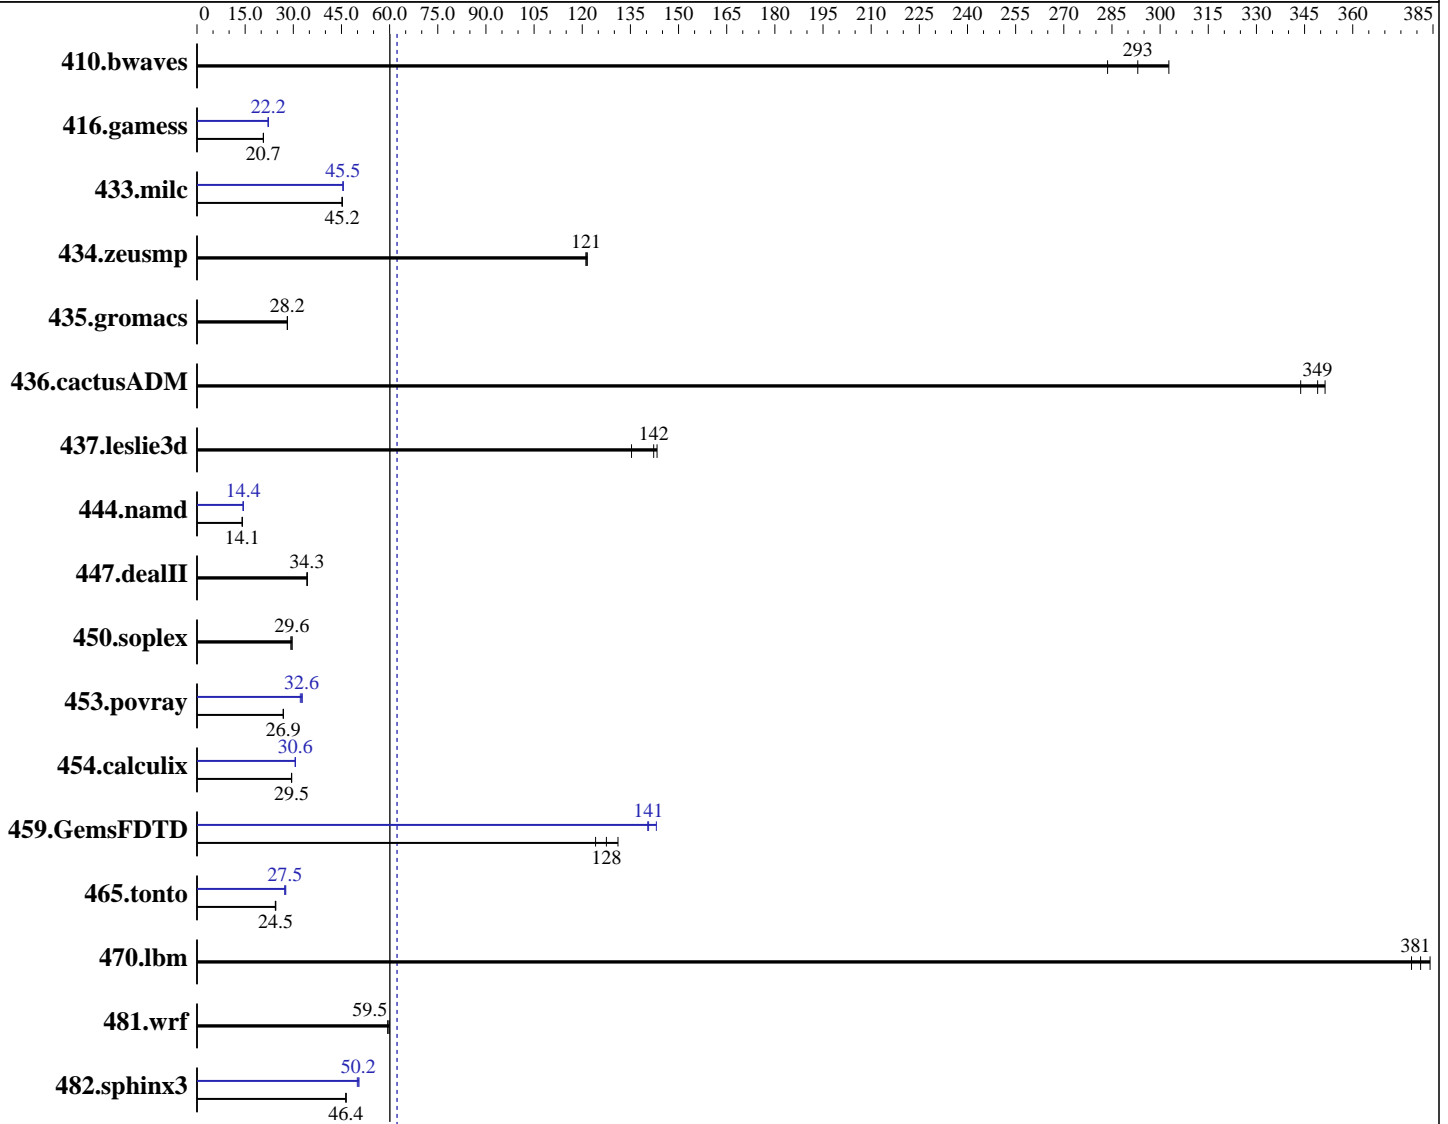

SPECfp\_base2006 = 60.1  
SPECfp2006 = 62.3

### Hardware

CPU Name: Intel Xeon E5-2618L v2  
 CPU Characteristics:  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)  
 3.10.0-123.el7.x86\_64  
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;  
 Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Huawei

SPECfp2006 = **62.3**

Huawei RH2288 v2 (Intel Xeon E5-2618L v2)

SPECfp\_base2006 = **60.1**

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Dec-2014

Hardware Availability: Sep-2013

Software Availability: Sep-2014

L3 Cache: 15 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC, running at 1333 MHz)  
Disk Subsystem: 1 x 300 GB SAS, 10000 RPM  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	47.9	284	<b>46.4</b>	<b>293</b>	44.9	303	47.9	284	<b>46.4</b>	<b>293</b>	44.9	303
416.gamess	947	20.7	<b>947</b>	<b>20.7</b>	946	20.7	882	22.2	882	22.2	<b>882</b>	<b>22.2</b>
433.milc	<b>203</b>	<b>45.2</b>	203	45.2	203	45.3	<b>202</b>	<b>45.5</b>	202	45.5	202	45.5
434.zeusmp	74.8	122	75.1	121	<b>75.1</b>	<b>121</b>	74.8	122	75.1	121	<b>75.1</b>	<b>121</b>
435.gromacs	253	28.2	<b>254</b>	<b>28.2</b>	254	28.1	253	28.2	<b>254</b>	<b>28.2</b>	254	28.1
436.cactusADM	34.8	344	<b>34.2</b>	<b>349</b>	34.0	351	34.8	344	<b>34.2</b>	<b>349</b>	34.0	351
437.leslie3d	65.6	143	<b>66.1</b>	<b>142</b>	69.4	135	65.6	143	<b>66.1</b>	<b>142</b>	69.4	135
444.namd	569	14.1	569	14.1	<b>569</b>	<b>14.1</b>	557	14.4	<b>557</b>	<b>14.4</b>	557	14.4
447.dealII	333	34.3	<b>333</b>	<b>34.3</b>	334	34.3	333	34.3	<b>333</b>	<b>34.3</b>	334	34.3
450.soplex	<b>282</b>	<b>29.6</b>	285	29.2	282	29.6	<b>282</b>	<b>29.6</b>	285	29.2	282	29.6
453.povray	<b>198</b>	<b>26.9</b>	198	26.9	198	26.9	162	32.8	<b>163</b>	<b>32.6</b>	165	32.2
454.calculix	280	29.4	280	29.5	<b>280</b>	<b>29.5</b>	<b>269</b>	<b>30.6</b>	269	30.6	270	30.6
459.GemsFDTD	<b>83.2</b>	<b>128</b>	80.9	131	85.5	124	75.6	140	<b>75.4</b>	<b>141</b>	74.2	143
465.tonto	<b>402</b>	<b>24.5</b>	401	24.5	403	24.4	<b>358</b>	<b>27.5</b>	356	27.6	360	27.3
470.lbm	35.8	384	<b>36.1</b>	<b>381</b>	36.3	378	35.8	384	<b>36.1</b>	<b>381</b>	36.3	378
481.wrf	187	59.9	<b>188</b>	<b>59.5</b>	188	59.4	187	59.9	<b>188</b>	<b>59.5</b>	188	59.4
482.sphinx3	420	46.4	<b>420</b>	<b>46.4</b>	420	46.4	386	50.5	390	49.9	<b>388</b>	<b>50.2</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:  
Set Power Efficiency Mode to Custom  
Baseboard Management Controller used to adjust the fan speed to 100%  
Set Hyper-Threading to Disabled  
Sysinfo program /spec15/config/sysinfo.rev6914  
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1  
running on localhost.localdomain Mon Dec 15 00:46:46 2014

This section contains SUT (System Under Test) info as seen by

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

<b>Huawei</b>	<b>SPECfp2006 =</b>	<b>62.3</b>
<b>Huawei RH2288 v2 (Intel Xeon E5-2618L v2)</b>	<b>SPECfp_base2006 =</b>	<b>60.1</b>

<b>CPU2006 license:</b> 3175	<b>Test date:</b> Dec-2014
<b>Test sponsor:</b> Huawei	<b>Hardware Availability:</b> Sep-2013
<b>Tested by:</b> Huawei	<b>Software Availability:</b> Sep-2014

## Platform Notes (Continued)

some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name      : Intel(R) Xeon(R) CPU E5-2618L v2 @ 2.00GHz
 2 "physical id"s (chips)
 12 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores      : 6
siblings       : 6
physical 0:    cores 0 1 2 3 4 5
physical 1:    cores 0 1 2 3 4 5
cache size     : 15360 KB
```

```
From /proc/meminfo
MemTotal:      263924204 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.0 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.0"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server
```

```
uname -a:
Linux localhost.localdomain 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57
EDT 2014 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Dec 12 10:27
```

```
SPEC is set to: /spec15
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-root ext4 256G  9.9G 233G   5% /
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Insyde Corp. RMIBV629 05/12/2014  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 62.3

Huawei RH2288 v2 (Intel Xeon E5-2618L v2)

SPECfp\_base2006 = 60.1

CPU2006 license: 3175  
Test sponsor: Huawei  
Tested by: Huawei

Test date: Dec-2014  
Hardware Availability: Sep-2013  
Software Availability: Sep-2014

## Platform Notes (Continued)

Memory:  
16x Hynix HMT42GR7BFR4C-RD 16 GB 2 rank 1867 MHz, configured at 1333 MHz  
8x NO DIMM NO DIMM

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

```
KMP_AFFINITY = "granularity=fine,compact,1,0"  
LD_LIBRARY_PATH = "/spec15/libs/32:/spec15/libs/64:/spec15/sh"  
OMP_NUM_THREADS = "12"
```

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64  
416.gamess: -DSPEC_CPU_LP64  
433.milc: -DSPEC_CPU_LP64  
434.zeusmp: -DSPEC_CPU_LP64  
435.gromacs: -DSPEC_CPU_LP64 -nofor_main  
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main  
437.leslie3d: -DSPEC_CPU_LP64  
444.namd: -DSPEC_CPU_LP64  
447.dealII: -DSPEC_CPU_LP64  
450.soplex: -DSPEC_CPU_LP64
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 62.3

Huawei RH2288 v2 (Intel Xeon E5-2618L v2)

SPECfp\_base2006 = 60.1

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Dec-2014

Hardware Availability: Sep-2013

Software Availability: Sep-2014

## Base Portability Flags (Continued)

```

453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:  
 -xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

C++ benchmarks:  
 -xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:  
 -xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:  
 -xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

## Peak Compiler Invocation

C benchmarks:  
 icc -m64

C++ benchmarks:  
 icpc -m64

Fortran benchmarks:  
 ifort -m64

Benchmarks using both Fortran and C:  
 icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 62.3

Huawei RH2288 v2 (Intel Xeon E5-2618L v2)

SPECfp\_base2006 = 60.1

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Dec-2014

Hardware Availability: Sep-2013

Software Availability: Sep-2014

## Peak Optimization Flags

### C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32  
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
-parallel

### C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

### Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Huawei** SPECfp2006 = **62.3**

Huawei RH2288 v2 (Intel Xeon E5-2618L v2) SPECfp\_base2006 = **60.1**

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Dec-2014

Hardware Availability: Sep-2013

Software Availability: Sep-2014

## Peak Optimization Flags (Continued)

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Jan 14 10:27:11 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 13 January 2015.