



SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp®2006 = 99.3

PowerEdge FC430 (Intel Xeon E5-2620 v3, 2.40 GHz)

SPECfp_base2006 = 94.2

CPU2006 license: 55


Test date: Jan-2015

Test sponsor: Dell Inc.

Hardware Availability: Apr-2015

Tested by: Dell Inc.

Software Availability: Apr-2015

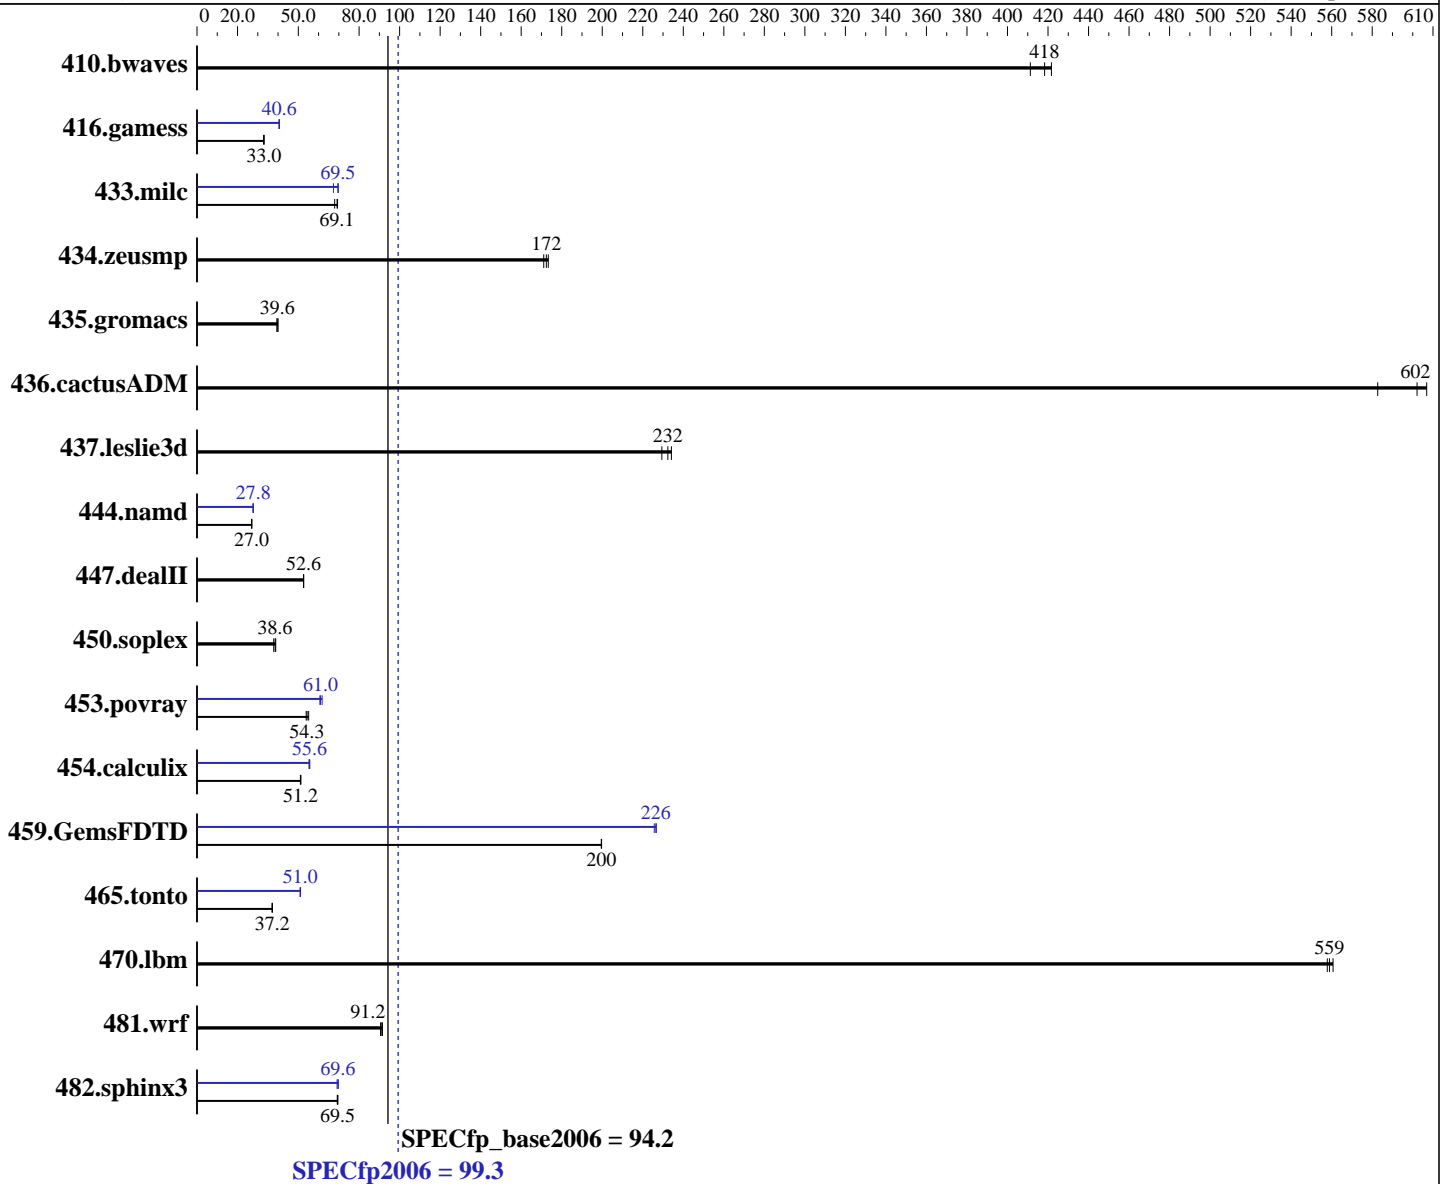

Hardware

CPU Name: Intel Xeon E5-2620 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 12
 3.12.28-4-default
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;
 Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4
 System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 99.3

PowerEdge FC430 (Intel Xeon E5-2620 v3, 2.40 GHz)

SPECfp_base2006 = 94.2

CPU2006 license: 55

Test date: Jan-2015

Test sponsor: Dell Inc.

Hardware Availability: Apr-2015

Tested by: Dell Inc.

Software Availability: Apr-2015

L3 Cache: 15 MB I+D on chip per chip
 Other Cache: None
 Memory: 128 GB (8 x 16 GB 2Rx4 PC4-2133P-R, running at 1866 MHz)
 Disk Subsystem: 1 x 200 GB SSD SATA
 Other Hardware: None

Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32.2	422	33.0	411	32.5	418	32.2	422	33.0	411	32.5	418
416.gamess	593	33.0	592	33.1	595	32.9	482	40.6	482	40.6	483	40.5
433.milc	135	67.9	133	69.1	132	69.4	136	67.3	132	69.7	132	69.5
434.zeusmp	53.2	171	52.8	172	52.5	173	53.2	171	52.8	172	52.5	173
435.gromacs	178	40.0	181	39.5	180	39.6	178	40.0	181	39.5	180	39.6
436.cactusADM	19.7	607	19.8	602	20.5	583	19.7	607	19.8	602	20.5	583
437.leslie3d	41.0	229	40.1	234	40.5	232	41.0	229	40.1	234	40.5	232
444.namd	298	26.9	297	27.0	297	27.0	290	27.6	289	27.8	289	27.8
447.dealII	218	52.6	217	52.6	217	52.6	218	52.6	217	52.6	217	52.6
450.soplex	220	37.9	216	38.6	215	38.8	220	37.9	216	38.6	215	38.8
453.povray	97.9	54.3	98.7	53.9	96.5	55.1	86.1	61.8	87.7	60.6	87.2	61.0
454.calculix	161	51.2	161	51.2	162	51.0	149	55.3	148	55.6	148	55.6
459.GemsFDTD	53.2	200	53.2	200	53.1	200	46.9	226	47.0	226	46.8	227
465.tonto	265	37.2	265	37.2	265	37.1	193	51.1	193	50.9	193	51.0
470.lbm	24.6	559	24.6	558	24.5	561	24.6	559	24.6	558	24.5	561
481.wrf	122	91.2	122	91.5	123	90.6	122	91.2	122	91.5	123	90.6
482.sphinx3	281	69.5	281	69.5	282	69.2	280	69.7	280	69.6	282	69.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS settings:
 Snoop Mode set to Home Snoop
 Virtualization Technology disabled
 System Profile set to Custom
 Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6914
 \$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1
 running on linux-8qjr Wed Jan 28 14:43:35 2015

This section contains SUT (System Under Test) info as seen by

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 99.3

PowerEdge FC430 (Intel Xeon E5-2620 v3, 2.40 GHz)

SPECfp_base2006 = 94.2

CPU2006 license: 55

Test date: Jan-2015

Test sponsor: Dell Inc.

Hardware Availability: Apr-2015

Tested by: Dell Inc.

Software Availability: Apr-2015

Platform Notes (Continued)

some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
  model name : Intel(R) Xeon(R) CPU E5-2620 v3 @ 2.40GHz
  2 "physical id"s (chips)
  24 "processors"
  cores, siblings (Caution: counting these is hw and system dependent. The
  following excerpts from /proc/cpuinfo might not be reliable. Use with
  caution.)
    cpu cores : 6
    siblings  : 12
    physical 0: cores 0 1 2 3 4 5
    physical 1: cores 0 1 2 3 4 5
  cache size : 15360 KB

```

```

From /proc/meminfo
MemTotal:      132187004 kB
HugePages_Total:    0
Hugepagesize:    2048 kB

```

```

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12

```

```

From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 0
# This file is deprecated and will be removed in a future service pack or
# release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12"
VERSION_ID="12"
PRETTY_NAME="SUSE Linux Enterprise Server 12"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12"

```

```

uname -a:
Linux linux-8qjr 3.12.28-4-default #1 SMP Thu Sep 25 17:02:34 UTC 2014
(9879bd4) x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Jan 28 08:54

```

SPEC is set to: /root/cpu2006-1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       ext4 176G  11G 165G   6% /
Additional information from dmidecode:

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 99.3

PowerEdge FC430 (Intel Xeon E5-2620 v3, 2.40 GHz)

SPECfp_base2006 = 94.2

CPU2006 license: 55

Test date: Jan-2015

Test sponsor: Dell Inc.

Hardware Availability: Apr-2015

Tested by: Dell Inc.

Software Availability: Apr-2015

Platform Notes (Continued)

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 0.4.0 01/08/2015

Memory:

8x 00CE00B300CE M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz, configured at 1867 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,1,0"

LD_LIBRARY_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"

OMP_NUM_THREADS = "12"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64 -nofor_main

436.cactusADM: -DSPEC_CPU_LP64 -nofor_main

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 99.3

PowerEdge FC430 (Intel Xeon E5-2620 v3, 2.40 GHz)

SPECfp_base2006 = 94.2

CPU2006 license: 55

Test date: Jan-2015

Test sponsor: Dell Inc.

Hardware Availability: Apr-2015

Tested by: Dell Inc.

Software Availability: Apr-2015

Base Portability Flags (Continued)

```

437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deall: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 99.3

PowerEdge FC430 (Intel Xeon E5-2620 v3, 2.40 GHz)

SPECfp_base2006 = 94.2

CPU2006 license: 55

Test date: Jan-2015

Test sponsor: Dell Inc.

Hardware Availability: Apr-2015

Tested by: Dell Inc.

Software Availability: Apr-2015

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32 -ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias
-parallel

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-inline-calloc -opt-malloc-options=3 -auto -unroll4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 99.3

PowerEdge FC430 (Intel Xeon E5-2620 v3, 2.40 GHz)

SPECfp_base2006 = 94.2

CPU2006 license: 55

Test date: Jan-2015

Test sponsor: Dell Inc.

Hardware Availability: Apr-2015

Tested by: Dell Inc.

Software Availability: Apr-2015

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Apr 16 15:39:12 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 16 April 2015.