SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6038R-TXR
(X10DRX-F , Intel Xeon E5-2697 v3)

SPECfp®2006 = 115

SPECfp_base2006 = 110

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Mar-2015
Hardware Availability: Sep-2014
Software Availability: Sep-2014

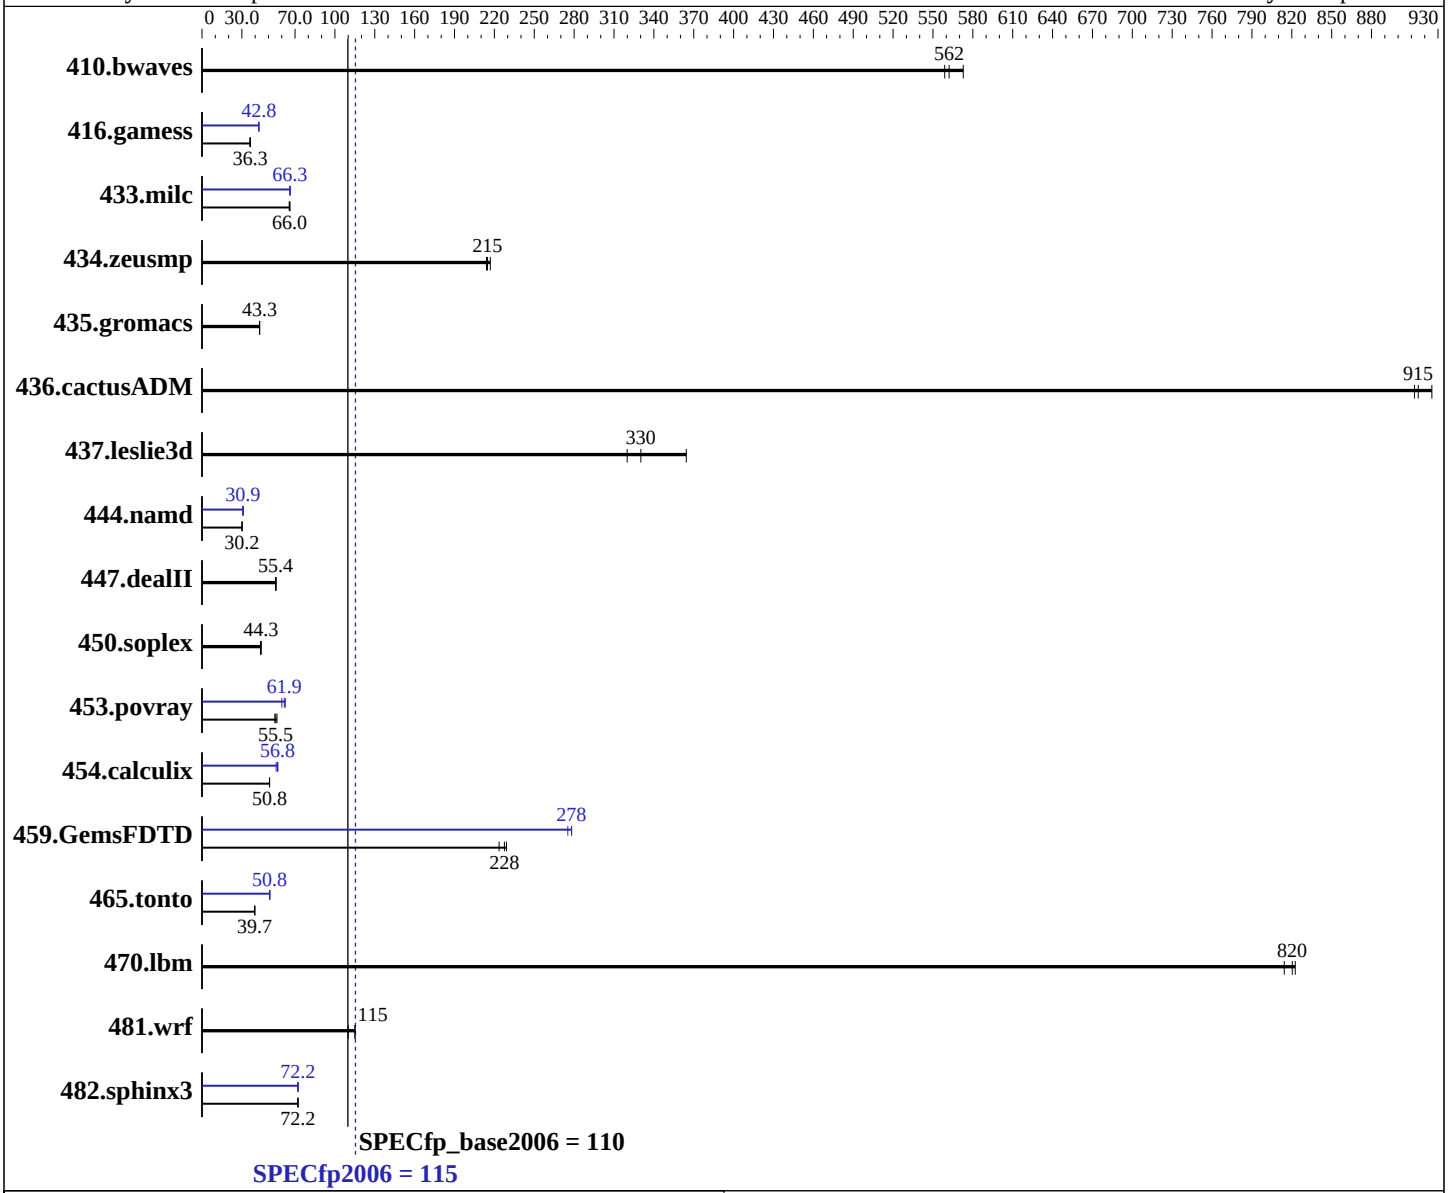

Hardware

CPU Name:	Intel Xeon E5-2697 v3
CPU Characteristics:	Intel Turbo Boost Technology up to 3.60 GHz
CPU MHz:	2600
FPU:	Integrated
CPU(s) enabled:	28 cores, 2 chips, 14 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 7.0, Kernel 3.10.0-123.9.3.el7.x86_64
Compiler:	C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux; Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux
Auto Parallel:	Yes
File System:	xfs
System State:	Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6038R-TXR
(X10DRX-F , Intel Xeon E5-2697 v3)

SPECfp2006 = 115

SPECfp_base2006 = 110

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Mar-2015
Hardware Availability: Sep-2014
Software Availability: Sep-2014

L3 Cache: 35 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)
Disk Subsystem: 1 x 200 GB SATA III SSD
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24.3	559	**24.2**	**562**	23.7	573	24.3	559	**24.2**	**562**	23.7	573
416.gamess	**540**	**36.3**	542	36.1	539	36.3	458	42.7	**458**	**42.8**	457	42.9
433.milc	**139**	**66.0**	139	66.2	140	65.6	139	66.1	**138**	**66.3**	138	66.3
434.zeusmp	42.5	214	42.0	217	**42.4**	**215**	42.5	214	42.0	217	**42.4**	**215**
435.gromacs	165	43.2	**165**	**43.3**	164	43.5	165	43.2	**165**	**43.3**	164	43.5
436.cactusADM	12.9	925	13.1	912	**13.1**	**915**	12.9	925	13.1	912	**13.1**	**915**
437.leslie3d	29.4	320	**28.5**	**330**	25.8	364	29.4	320	**28.5**	**330**	25.8	364
444.namd	**266**	**30.2**	266	30.2	267	30.0	**259**	**30.9**	257	31.2	262	30.6
447.dealII	205	55.8	**206**	**55.4**	206	55.4	205	55.8	**206**	**55.4**	206	55.4
450.soplex	**188**	**44.3**	189	44.0	187	44.5	**188**	**44.3**	189	44.0	187	44.5
453.povray	97.1	54.8	94.3	56.4	**95.8**	**55.5**	88.6	60.1	84.9	62.7	**85.9**	**61.9**
454.calculix	163	50.8	162	50.9	**162**	**50.8**	148	55.8	144	57.1	**145**	**56.8**
459.GemsFDTD	46.3	229	47.5	224	**46.6**	**228**	38.1	278	**38.2**	**278**	38.5	275
465.tonto	248	39.7	**248**	**39.7**	248	39.6	194	50.8	**194**	**50.8**	192	51.2
470.lbm	16.9	814	**16.7**	**820**	16.7	823	16.9	814	**16.7**	**820**	16.7	823
481.wrf	96.9	115	**97.1**	**115**	101	110	96.9	115	**97.1**	**115**	101	110
482.sphinx3	**270**	**72.2**	270	72.2	270	72.3	**270**	**72.2**	269	72.4	271	72.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS Settings:
Enforce POR = Disabled
Memory Frequency = 2133
Early Snoop = Disable
Sysinfo program /usr/cpu2006/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on X10DRX-01 Wed Mar 25 11:51:06 2015

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
```

Continued on next page

Platform Notes (Continued)

```
      http://www.spec.org/cpu2006/Docs/config.html#sysinfo

    From /proc/cpuinfo
       model name : Intel(R) Xeon(R) CPU E5-2697 v3 @ 2.60GHz
          2 "physical id"s (chips)
          56 "processors"
       cores, siblings (Caution: counting these is hw and system dependent.  The
       following excerpts from /proc/cpuinfo might not be reliable.  Use with
       caution.)
          cpu cores : 14
          siblings  : 28
          physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
          physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
       cache size : 35840 KB

    From /proc/meminfo
       MemTotal:       263864732 kB
       HugePages_Total:       0
       Hugepagesize:       2048 kB

    From /etc/*release* /etc/*version*
       os-release:
          NAME="Red Hat Enterprise Linux Server"
          VERSION="7.0 (Maipo)"
          ID="rhel"
          ID_LIKE="fedora"
          VERSION_ID="7.0"
          PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
          ANSI_COLOR="0;31"
          CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
       redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
       system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
       system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server

    uname -a:
       Linux X10DRX-01 3.10.0-123.9.3.el7.x86_64 #1 SMP Thu Oct 30 00:16:40 EDT 2014
       x86_64 x86_64 x86_64 GNU/Linux

    run-level 3 Mar 25 11:27

    SPEC is set to: /usr/cpu2006
       Filesystem     Type  Size  Used Avail Use% Mounted on
       /dev/sda2      xfs   183G  5.3G  178G   3% /
    Additional information from dmidecode:

       Warning: Use caution when you interpret this section. The 'dmidecode' program
       reads system data which is "intended to allow hardware to be accurately
       determined", but the intent may not be met, as there are frequent changes to
       hardware, firmware, and the "DMTF SMBIOS" standard.

      BIOS American Megatrends Inc. T20150130182602 01/30/2015
      Memory:
```

Continued on next page

Platform Notes (Continued)

```
      16x Samsung (date:14/5q) M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz

   (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64:/usr/cpu2006/sh"
OMP_NUM_THREADS = "28"

 Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB
 memory using RedHat EL 7.0
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

```
    410.bwaves: -DSPEC_CPU_LP64
    416.gamess: -DSPEC_CPU_LP64
      433.milc: -DSPEC_CPU_LP64
    434.zeusmp: -DSPEC_CPU_LP64
    435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
    437.leslie3d: -DSPEC_CPU_LP64
     444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
    450.soplex: -DSPEC_CPU_LP64
    453.povray: -DSPEC_CPU_LP64
    454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
      465.tonto: -DSPEC_CPU_LP64
```

Continued on next page

Base Portability Flags (Continued)

470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32 -ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias -parallel

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

454.calculix: `-xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias`

481.wrf: `basepeak = yes`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html`
`http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revG.20141230.00.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml`
`http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revG.20141230.00.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue May 5 15:14:15 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 5 May 2015.