



# SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECfp®2006 = **119**

ProLiant XL170r Gen9  
(3.20 GHz, Intel Xeon E5-2667 v3)

SPECfp\_base2006 = **114**

CPU2006 license: 3


Test date: Mar-2015

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2015

Tested by: Hewlett-Packard Company

Software Availability: Sep-2014

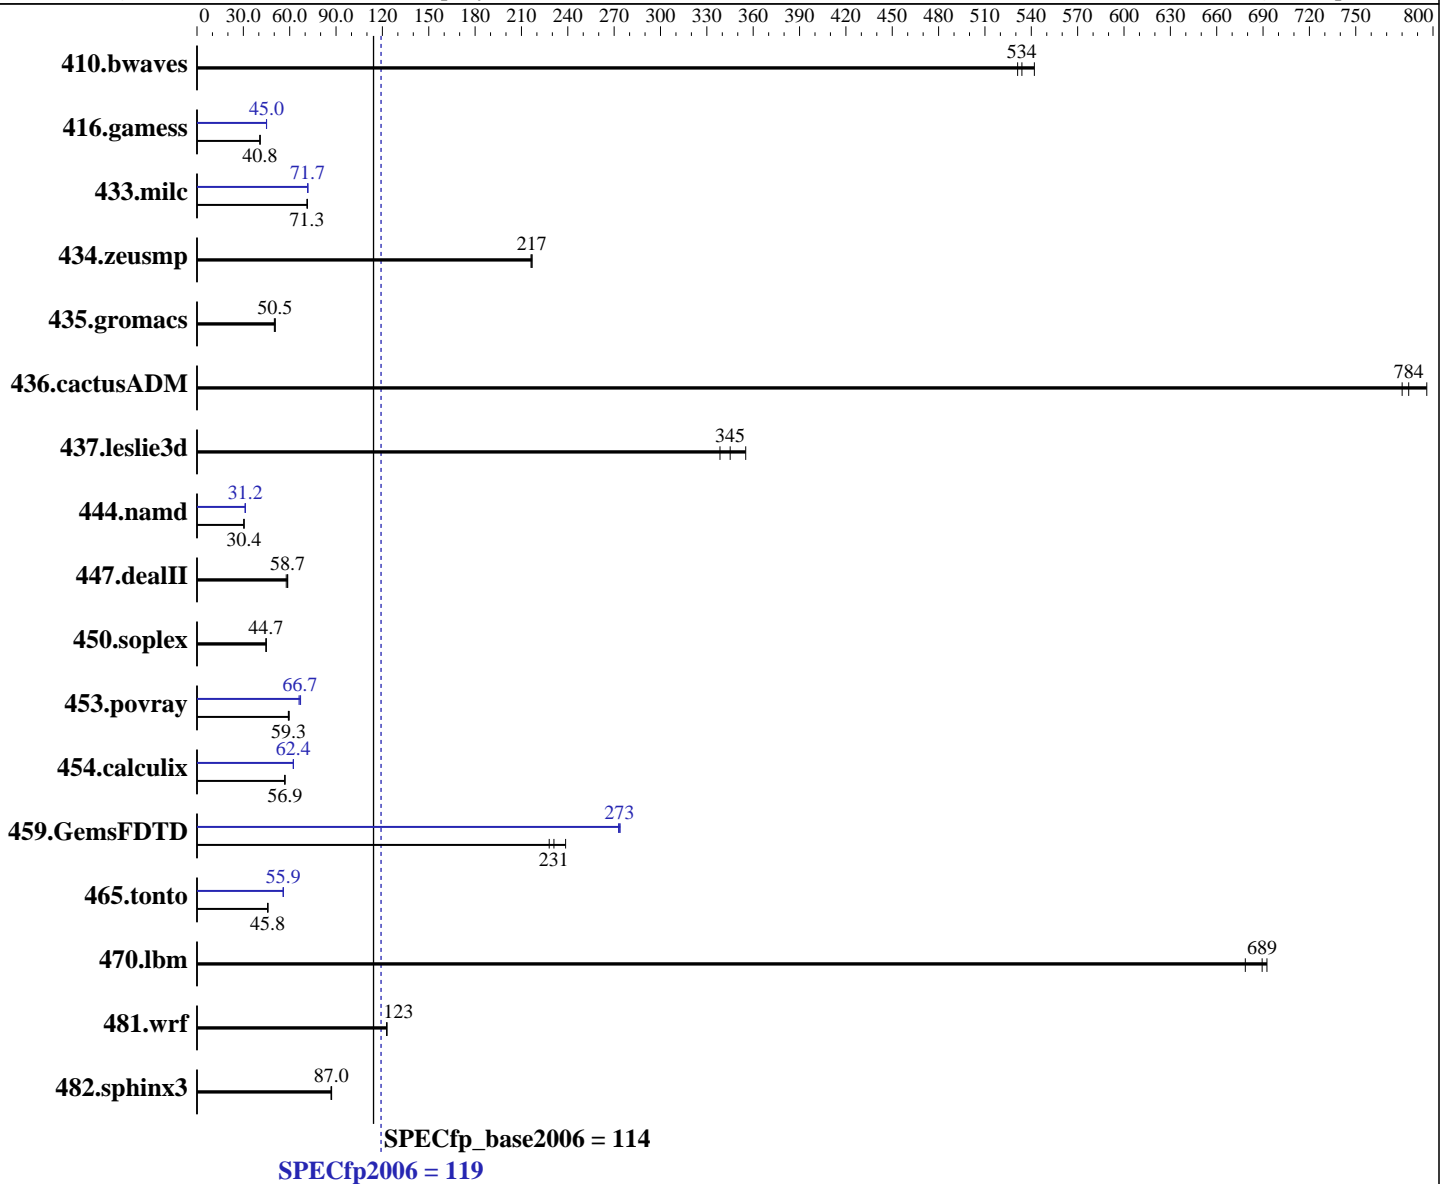

Hardware		Software	
CPU Name:	Intel Xeon E5-2667 v3	Operating System:	Red Hat Enterprise Linux Server release 7.0 (Maipo)
CPU Characteristics:	Intel Turbo Boost Technology up to 3.60 GHz		Kernel 3.10.0-123.el7.x86_64
CPU MHz:	3200	Compiler:	C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;
FPU:	Integrated		Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux
CPU(s) enabled:	16 cores, 2 chips, 8 cores/chip	Auto Parallel:	Yes
CPU(s) orderable:	1,2 chip	File System:	xfs
Primary Cache:	32 KB I + 32 KB D on chip per core		
Secondary Cache:	256 KB I+D on chip per core		
Continued on next page		Continued on next page	



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECfp2006 = **119**

ProLiant XL170r Gen9  
(3.20 GHz, Intel Xeon E5-2667 v3)

SPECfp\_base2006 = **114**

<b>CPU2006 license:</b> 3	<b>Test date:</b> Mar-2015
<b>Test sponsor:</b> Hewlett-Packard Company	<b>Hardware Availability:</b> Mar-2015
<b>Tested by:</b> Hewlett-Packard Company	<b>Software Availability:</b> Sep-2014

L3 Cache: 20 MB I+D on chip per chip	System State: Run level 3 (multi-user)
Other Cache: None	Base Pointers: 64-bit
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)	Peak Pointers: 32/64-bit
Disk Subsystem: 1 x 400 GB SATA SSD, RAID 0	Other Software: None
Other Hardware: None	

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	25.6	531	25.1	542	<u>25.5</u>	<u>534</u>	25.6	531	25.1	542	<u>25.5</u>	<u>534</u>
416.gamess	481	40.7	479	40.9	<u>480</u>	<u>40.8</u>	<u>435</u>	<u>45.0</u>	435	45.0	435	45.0
433.milc	128	71.5	<u>129</u>	<u>71.3</u>	129	71.3	128	71.6	128	71.8	<u>128</u>	<u>71.7</u>
434.zeusmp	42.1	216	42.0	217	<u>42.0</u>	<u>217</u>	42.1	216	42.0	217	<u>42.0</u>	<u>217</u>
435.gromacs	141	50.6	<u>141</u>	<u>50.5</u>	143	50.1	141	50.6	<u>141</u>	<u>50.5</u>	143	50.1
436.cactusADM	15.3	780	<u>15.2</u>	<u>784</u>	15.0	796	15.3	780	<u>15.2</u>	<u>784</u>	15.0	796
437.leslie3d	<u>27.2</u>	<u>345</u>	27.8	338	26.5	355	<u>27.2</u>	<u>345</u>	27.8	338	26.5	355
444.namd	264	30.4	264	30.4	<u>264</u>	<u>30.4</u>	257	31.2	257	31.3	<u>257</u>	<u>31.2</u>
447.dealII	<u>195</u>	<u>58.7</u>	195	58.7	198	57.8	<u>195</u>	<u>58.7</u>	195	58.7	198	57.8
450.soplex	186	44.8	186	44.7	<u>186</u>	<u>44.7</u>	186	44.8	186	44.7	<u>186</u>	<u>44.7</u>
453.povray	90.0	59.1	<u>89.7</u>	<u>59.3</u>	89.1	59.7	80.5	66.0	<u>79.7</u>	<u>66.7</u>	79.4	67.0
454.calculix	145	57.0	145	56.8	<u>145</u>	<u>56.9</u>	<u>132</u>	<u>62.4</u>	132	62.4	132	62.4
459.GemsFDTD	<u>45.9</u>	<u>231</u>	46.5	228	44.5	239	38.9	273	<u>38.8</u>	<u>273</u>	38.7	274
465.tonto	215	45.7	214	46.0	<u>215</u>	<u>45.8</u>	<u>176</u>	<u>55.9</u>	176	55.8	176	55.9
470.lbm	19.8	693	20.2	679	<u>19.9</u>	<u>689</u>	19.8	693	20.2	679	<u>19.9</u>	<u>689</u>
481.wrf	90.9	123	<u>91.0</u>	<u>123</u>	91.0	123	90.9	123	<u>91.0</u>	<u>123</u>	91.0	123
482.sphinx3	225	86.8	224	87.1	<u>224</u>	<u>87.0</u>	225	86.8	224	87.1	<u>224</u>	<u>87.0</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/transparent\_hugepage/enabled

## Platform Notes

BIOS Configuration:  
Intel Hyperthreading Options set to Disabled  
HP Power Profile set to Custom  
HP Power Regulator set to HP Static High Performance Mode  
Minimum Processor Idle Power Package C-State set to No Package State  
Energy/Performance Bias set to Maximum Performance  
QPI Snoop Configuration set to Home Snoop  
Thermal Configuration set to Maximum Cooling

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECfp2006 = 119

ProLiant XL170r Gen9  
(3.20 GHz, Intel Xeon E5-2667 v3)

SPECfp\_base2006 = 114

**CPU2006 license:** 3  
**Test sponsor:** Hewlett-Packard Company  
**Tested by:** Hewlett-Packard Company

**Test date:** Mar-2015  
**Hardware Availability:** Mar-2015  
**Software Availability:** Sep-2014

### Platform Notes (Continued)

Processor Power and Utilization Monitoring set to Disabled  
Memory Refresh Rate set to 1x Refresh

Sysinfo program /cpu2006/config/sysinfo.rev6914  
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1  
running on R110-xl170-A Tue Mar 31 17:11:01 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name      : Intel(R) Xeon(R) CPU E5-2667 v3 @ 3.20GHz
 2 "physical id"s (chips)
 16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores      : 8
  siblings       : 8
  physical 0:    cores 0 1 2 3 4 5 6 7
  physical 1:    cores 0 1 2 3 4 5 6 7
cache size      : 20480 KB
```

```
From /proc/meminfo
MemTotal:        263847148 kB
HugePages_Total: 0
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.0 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.0"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server
```

```
uname -a:
Linux R110-xl170-A 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57 EDT 2014
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Mar 31 16:28

```
SPEC is set to: /cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4       xfs   307G  166G  141G  55% /
Continued on next page
```



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp2006 = 119**

ProLiant XL170r Gen9  
(3.20 GHz, Intel Xeon E5-2667 v3)

**SPECfp\_base2006 = 114**

**CPU2006 license:** 3

**Test date:** Mar-2015

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Mar-2015

**Tested by:** Hewlett-Packard Company

**Software Availability:** Sep-2014

## Platform Notes (Continued)

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HP U14 03/05/2015

Memory:

5x HP 752369-081 16 GB 2 rank 2133 MHz

11x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2133 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"

LD\_LIBRARY\_PATH = "/cpu2006/libs/32:/cpu2006/libs/64:/cpu2006/sh"

OMP\_NUM\_THREADS = "16"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main

436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp2006 = 119**

ProLiant XL170r Gen9  
(3.20 GHz, Intel Xeon E5-2667 v3)

**SPECfp\_base2006 = 114**

**CPU2006 license:** 3

**Test date:** Mar-2015

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Mar-2015

**Tested by:** Hewlett-Packard Company

**Software Availability:** Sep-2014

## Base Portability Flags (Continued)

```

437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deall: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

```

## Peak Compiler Invocation

C benchmarks:

```

icc -m64

```

C++ benchmarks:

```

icpc -m64

```

Fortran benchmarks:

```

ifort -m64

```

Benchmarks using both Fortran and C:

```

icc -m64 ifort -m64

```



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp2006 = 119**

ProLiant XL170r Gen9  
(3.20 GHz, Intel Xeon E5-2667 v3)

**SPECfp\_base2006 = 114**

**CPU2006 license:** 3

**Test date:** Mar-2015

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Mar-2015

**Tested by:** Hewlett-Packard Company

**Software Availability:** Sep-2014

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32 -ansi-alias

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-inline-calloc -opt-malloc-options=3 -auto -unroll4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp2006 = 119**

ProLiant XL170r Gen9  
(3.20 GHz, Intel Xeon E5-2667 v3)

**SPECfp\_base2006 = 114**

**CPU2006 license:** 3

**Test date:** Mar-2015

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Mar-2015

**Tested by:** Hewlett-Packard Company

**Software Availability:** Sep-2014

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Apr 21 18:22:41 2015 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 21 April 2015.