



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2530 M1, Intel Xeon E5-2630L v3, 1.8 GHz

SPECfp<sup>®</sup>2006 = 97.7

SPECfp\_base2006 = 91.5

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Mar-2015

Hardware Availability: Feb-2015

Software Availability: Sep-2014

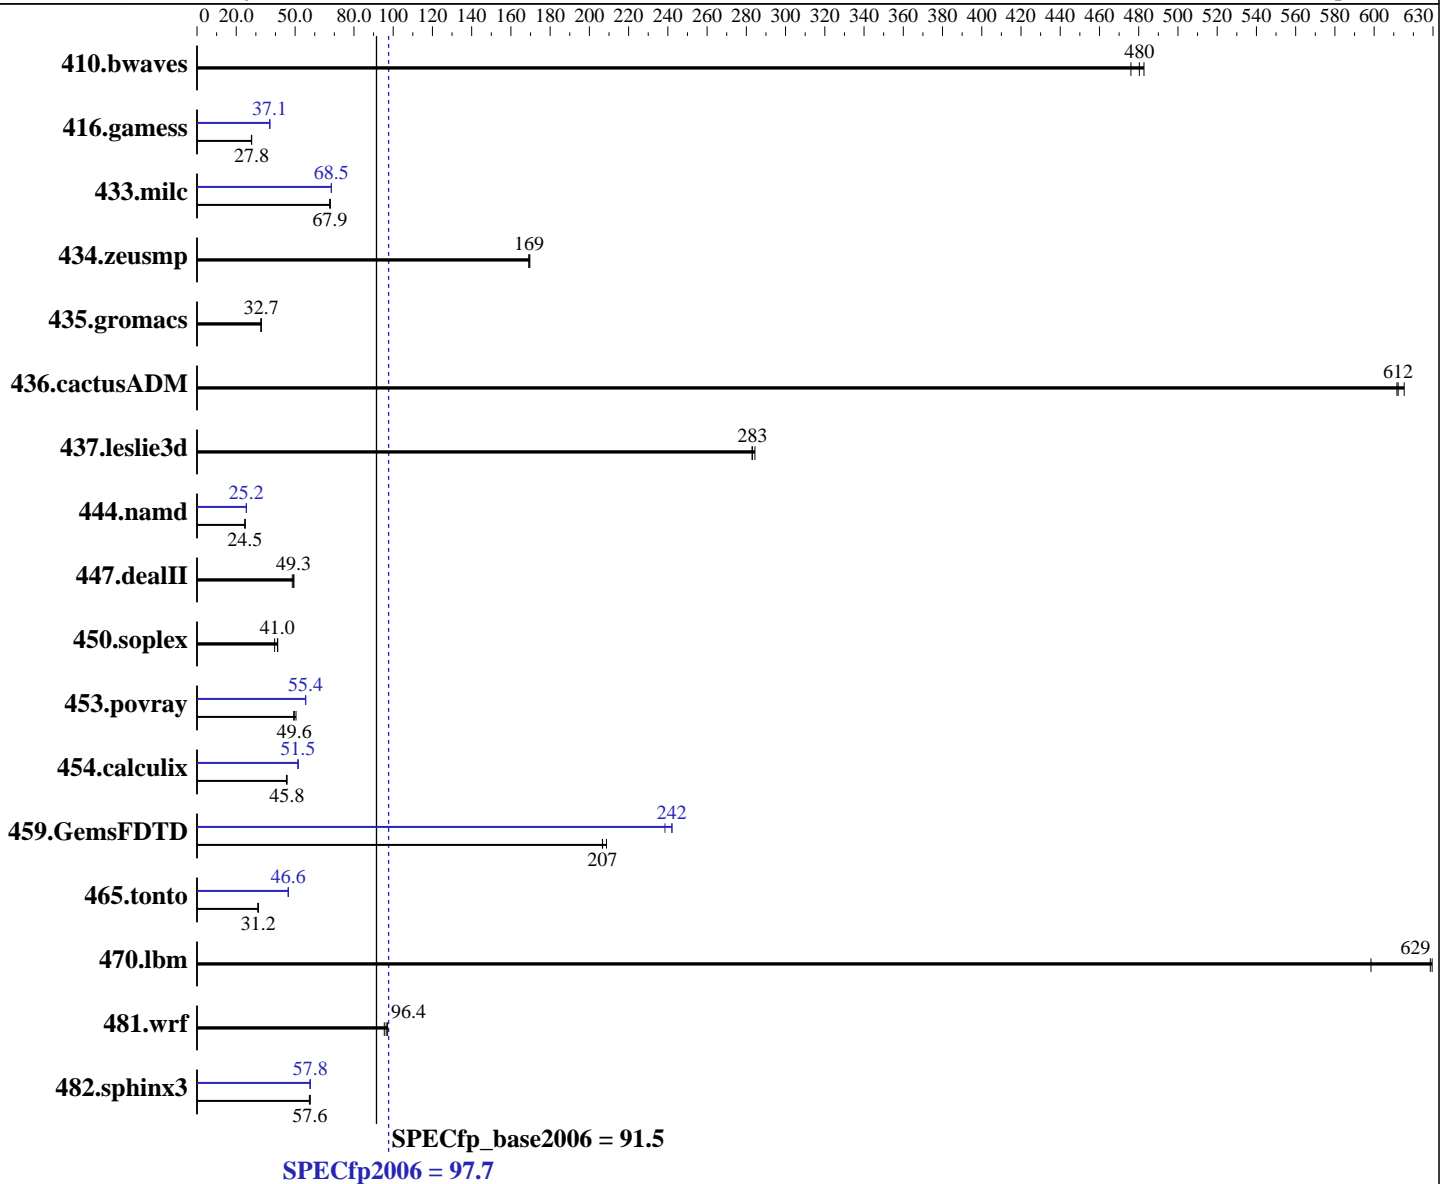

### Hardware

CPU Name: Intel Xeon E5-2630L v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.90 GHz  
 CPU MHz: 1800  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)  
 Kernel 3.10.0-123.8.1.el7.x86\_64  
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;  
 Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: xfs

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2530 M1, Intel Xeon E5-2630L v3, 1.8 GHz

SPECfp2006 = **97.7**

SPECfp\_base2006 = **91.5**

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Mar-2015

Hardware Availability: Feb-2015

Software Availability: Sep-2014

L3 Cache: 20 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R, running at 1866 MHz)  
Disk Subsystem: 1 x SATA, 500 GB, 7200 RPM  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	<b><u>28.3</u></b>	<b><u>480</u></b>	28.5	476	28.2	483	<b><u>28.3</u></b>	<b><u>480</u></b>	28.5	476	28.2	483
416.gamess	706	27.7	<b><u>704</u></b>	<b><u>27.8</u></b>	703	27.9	<b><u>528</u></b>	<b><u>37.1</u></b>	528	37.1	528	37.1
433.milc	<b><u>135</u></b>	<b><u>67.9</u></b>	135	67.9	136	67.6	<b><u>134</u></b>	<b><u>68.5</u></b>	134	68.5	134	68.5
434.zeusmp	<b><u>53.7</u></b>	<b><u>169</u></b>	53.6	170	53.8	169	<b><u>53.7</u></b>	<b><u>169</u></b>	53.6	170	53.8	169
435.gromacs	218	32.7	<b><u>218</u></b>	<b><u>32.7</u></b>	219	32.7	218	32.7	<b><u>218</u></b>	<b><u>32.7</u></b>	219	32.7
436.cactusADM	19.5	612	<b><u>19.5</u></b>	<b><u>612</u></b>	19.4	615	19.5	612	<b><u>19.5</u></b>	<b><u>612</u></b>	19.4	615
437.leslie3d	33.2	283	33.1	284	<b><u>33.2</u></b>	<b><u>283</u></b>	33.2	283	33.1	284	<b><u>33.2</u></b>	<b><u>283</u></b>
444.namd	<b><u>327</u></b>	<b><u>24.5</u></b>	328	24.5	327	24.5	319	25.2	318	25.2	<b><u>319</u></b>	<b><u>25.2</u></b>
447.dealII	232	49.4	236	48.6	<b><u>232</u></b>	<b><u>49.3</u></b>	232	49.4	236	48.6	<b><u>232</u></b>	<b><u>49.3</u></b>
450.soplex	211	39.6	203	41.2	<b><u>203</u></b>	<b><u>41.0</u></b>	211	39.6	203	41.2	<b><u>203</u></b>	<b><u>41.0</u></b>
453.povray	108	49.3	<b><u>107</u></b>	<b><u>49.6</u></b>	105	50.5	96.1	55.4	96.1	55.4	<b><u>96.1</u></b>	<b><u>55.4</u></b>
454.calculix	180	45.9	181	45.6	<b><u>180</u></b>	<b><u>45.8</u></b>	<b><u>160</u></b>	<b><u>51.5</u></b>	160	51.5	160	51.5
459.GemsFDTD	<b><u>51.3</u></b>	<b><u>207</u></b>	51.3	207	50.8	209	44.5	239	43.8	242	<b><u>43.8</u></b>	<b><u>242</u></b>
465.tonto	314	31.4	<b><u>316</u></b>	<b><u>31.2</u></b>	318	31.0	211	46.6	212	46.5	<b><u>211</u></b>	<b><u>46.6</u></b>
470.lbm	<b><u>21.9</u></b>	<b><u>629</u></b>	23.0	598	21.8	630	<b><u>21.9</u></b>	<b><u>629</u></b>	23.0	598	21.8	630
481.wrf	<b><u>116</u></b>	<b><u>96.4</u></b>	117	95.5	115	97.2	<b><u>116</u></b>	<b><u>96.4</u></b>	117	95.5	115	97.2
482.sphinx3	340	57.3	338	57.7	<b><u>338</u></b>	<b><u>57.6</u></b>	<b><u>337</u></b>	<b><u>57.8</u></b>	337	57.8	339	57.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:  
Energy Performance = Performance  
Utilization Profile = Unbalanced  
QPI snoop mode: Home Snoop  
COD Enable = Disabled, Early Snoop = Disabled  
CPU C1E Support = Disabled



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2530 M1, Intel Xeon E5-2630L v3, 1.8 GHz

SPECfp2006 = 97.7

SPECfp\_base2006 = 91.5

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Mar-2015  
Hardware Availability: Feb-2015  
Software Availability: Sep-2014

### General Notes

Environment variables set by runspec before the start of the run:  
KMP\_AFFINITY = "granularity=fine,compact,1,0"  
LD\_LIBRARY\_PATH = "/home/SPECcpu2006/libs/32:/home/SPECcpu2006/libs/64:/home/SPECcpu2006/sh"  
OMP\_NUM\_THREADS = "16"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

For information about Fujitsu please visit: <http://www.fujitsu.com>

### Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

### Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY RX2530 M1, Intel Xeon E5-2630L v3, 1.8 GHz

**SPECfp2006 = 97.7**

**SPECfp\_base2006 = 91.5**

**CPU2006 license:** 19  
**Test sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test date:** Mar-2015  
**Hardware Availability:** Feb-2015  
**Software Availability:** Sep-2014

## Base Optimization Flags

C benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch  
-ansi-alias

C++ benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch  
-ansi-alias

## Peak Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32 -ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
-parallel

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2530 M1, Intel Xeon E5-2630L v3, 1.8 GHz

SPECfp2006 = 97.7

SPECfp\_base2006 = 91.5

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Mar-2015  
Hardware Availability: Feb-2015  
Software Availability: Sep-2014

## Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-HSW-RevA.html>



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2530 M1, Intel Xeon E5-2630L v3, 1.8 GHz

SPECfp2006 = 97.7

SPECfp\_base2006 = 91.5

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Mar-2015

**Hardware Availability:** Feb-2015

**Software Availability:** Sep-2014

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-HSW-RevA.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue May 19 18:14:02 2015 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 19 May 2015.