



SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp®2006 = **99.7**

ProLiant BL660c Gen9
(2.10 GHz, Intel Xeon E5-4650 v3)

SPECfp_base2006 = **94.0**

CPU2006 license: 3


Test date: May-2015

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2015

Tested by: Hewlett-Packard Company

Software Availability: Oct-2014

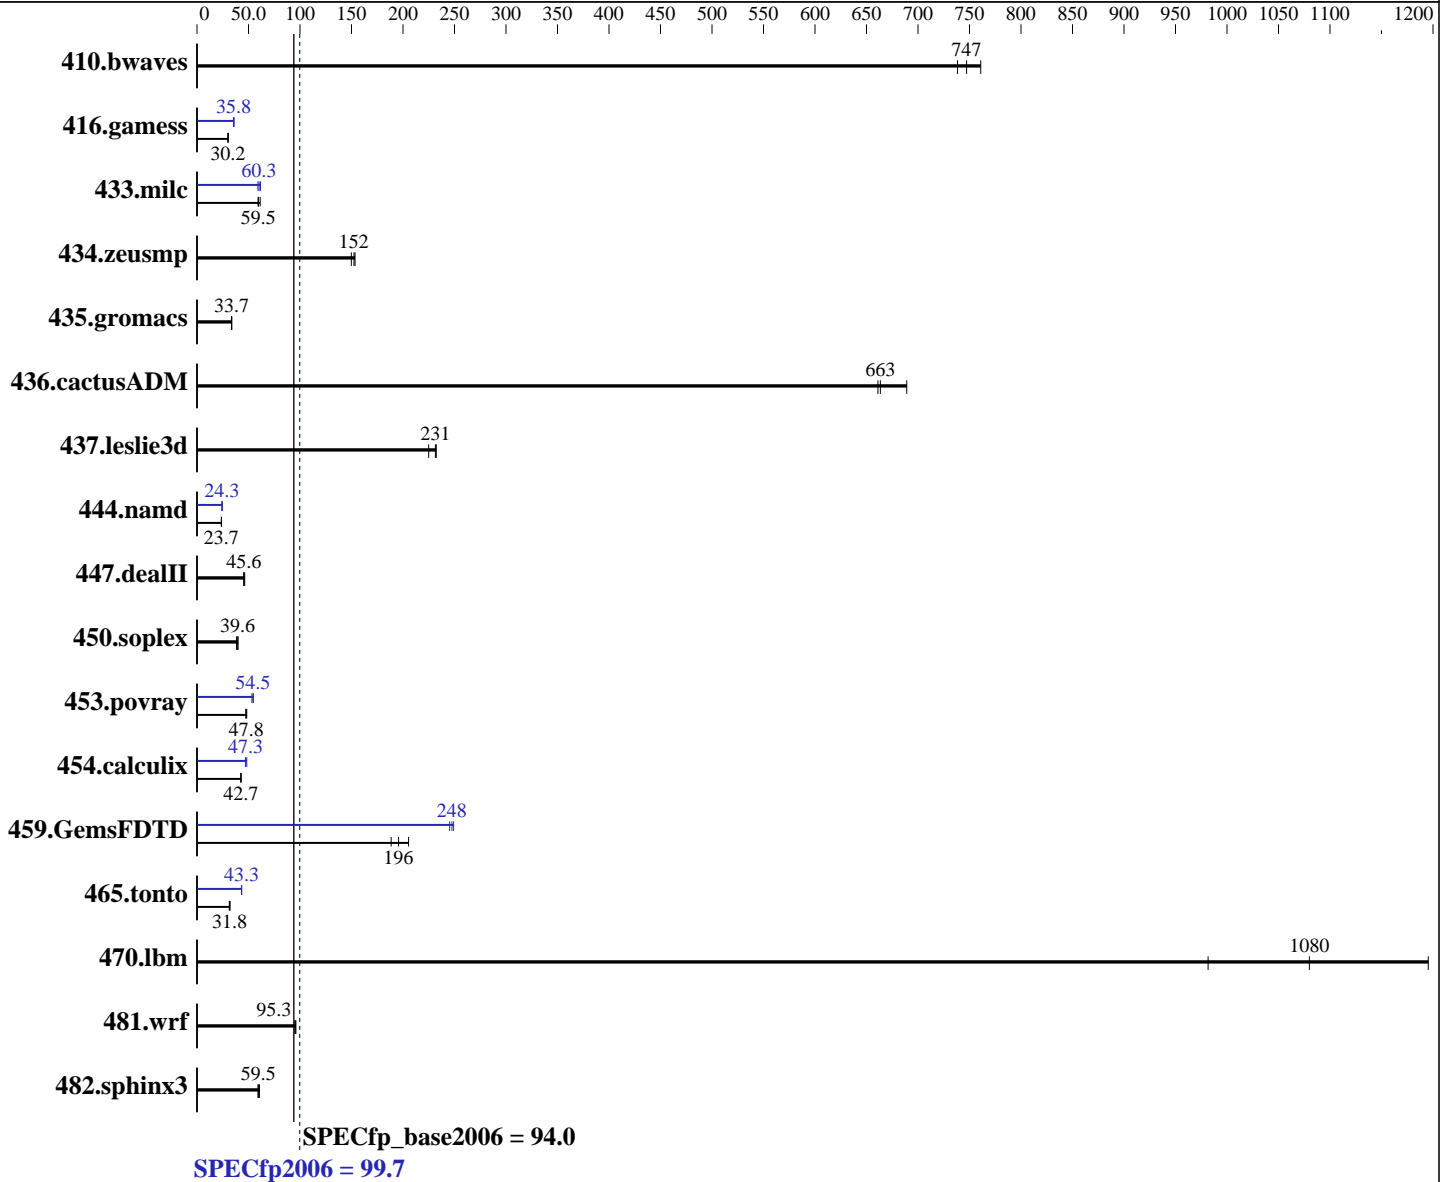

Hardware

CPU Name: Intel Xeon E5-4650 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz
 CPU MHz: 2100
 FPU: Integrated
 CPU(s) enabled: 48 cores, 4 chips, 12 cores/chip
 CPU(s) orderable: 2,4 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 12 (x86_64)
 Kernel 3.12.28-4-default
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;
 Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: xfs
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp2006 = **99.7**

ProLiant BL660c Gen9
(2.10 GHz, Intel Xeon E5-4650 v3)

SPECfp_base2006 = **94.0**

CPU2006 license: 3

Test date: May-2015

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2015

Tested by: Hewlett-Packard Company

Software Availability: Oct-2014

L3 Cache: 30 MB I+D on chip per chip
Other Cache: None
Memory: 512 GB (32 x 16 GB 2Rx4 PC4-2133P-R)
Disk Subsystem: 1 x 400 GB SAS SSD, RAID 0
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	17.9	761	18.4	738	<u>18.2</u>	<u>747</u>	17.9	761	18.4	738	<u>18.2</u>	<u>747</u>
416.gamess	648	30.2	650	30.1	<u>649</u>	<u>30.2</u>	547	35.8	550	35.6	<u>548</u>	<u>35.8</u>
433.milc	<u>154</u>	<u>59.5</u>	150	61.3	154	59.5	149	61.6	<u>152</u>	<u>60.3</u>	155	59.2
434.zeusmp	59.3	153	60.7	150	<u>59.7</u>	<u>152</u>	59.3	153	60.7	150	<u>59.7</u>	<u>152</u>
435.gromacs	212	33.7	213	33.5	<u>212</u>	<u>33.7</u>	212	33.7	213	33.5	<u>212</u>	<u>33.7</u>
436.cactusADM	17.3	689	<u>18.0</u>	<u>663</u>	18.1	661	17.3	689	<u>18.0</u>	<u>663</u>	18.1	661
437.leslie3d	41.8	225	<u>40.6</u>	<u>231</u>	40.5	232	41.8	225	<u>40.6</u>	<u>231</u>	40.5	232
444.namd	<u>338</u>	<u>23.7</u>	338	23.7	339	23.7	<u>329</u>	<u>24.3</u>	329	24.4	329	24.3
447.dealII	247	46.3	<u>251</u>	<u>45.6</u>	252	45.4	247	46.3	<u>251</u>	<u>45.6</u>	252	45.4
450.soplex	209	39.8	<u>211</u>	<u>39.6</u>	217	38.4	209	39.8	<u>211</u>	<u>39.6</u>	217	38.4
453.povray	<u>111</u>	<u>47.8</u>	110	48.3	112	47.4	<u>97.7</u>	<u>54.5</u>	99.9	53.3	97.2	54.7
454.calculix	193	42.7	193	42.7	<u>193</u>	<u>42.7</u>	175	47.0	171	48.3	<u>174</u>	<u>47.3</u>
459.GemsFDTD	56.3	189	<u>54.2</u>	<u>196</u>	51.7	205	<u>42.9</u>	<u>248</u>	43.3	245	42.6	249
465.tonto	<u>310</u>	<u>31.8</u>	314	31.4	307	32.0	227	43.4	228	43.2	<u>227</u>	<u>43.3</u>
470.lbm	<u>12.7</u>	<u>1080</u>	11.5	1200	14.0	982	<u>12.7</u>	<u>1080</u>	11.5	1200	14.0	982
481.wrf	<u>117</u>	<u>95.3</u>	117	95.2	116	96.0	<u>117</u>	<u>95.3</u>	117	95.2	116	96.0
482.sphinx3	321	60.6	<u>327</u>	<u>59.5</u>	329	59.3	321	60.6	<u>327</u>	<u>59.5</u>	329	59.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled

Platform Notes

BIOS Configuration:
Intel Hyperthreading Options set to Disabled
HP Power Profile set to Custom
HP Power Regulator to HP Static High Performance Mode
Minimum Processor Idle Power Core State set to C6 State
Energy/Performance Bias set to Maximum Performance
Collaborative Power Control set to Disabled
Thermal Configuration set to Maximum Cooling

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp2006 = 99.7

ProLiant BL660c Gen9
(2.10 GHz, Intel Xeon E5-4650 v3)

SPECfp_base2006 = 94.0

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: May-2015
Hardware Availability: Jun-2015
Software Availability: Oct-2014

Platform Notes (Continued)

Processor Power and Utilization Monitoring set to Disabled
Memory Refresh Rate set to 1x Refresh
Sysinfo program /root/cpu2006/config/sysinfo.rev6914
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1
running on linux-wzg5 Thu May 21 00:04:16 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name      : Intel(R) Xeon(R) CPU E5-4650 v3 @ 2.10GHz
 4 "physical id"s (chips)
 48 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores      : 12
siblings       : 12
physical 0:    cores 0 1 2 3 4 5 8 9 10 11 12 13
physical 1:    cores 0 1 2 3 4 5 8 9 10 11 12 13
physical 2:    cores 0 1 2 3 4 5 8 9 10 11 12 13
physical 3:    cores 0 1 2 3 4 5 8 9 10 11 12 13
cache size     : 30720 KB
```

```
From /proc/meminfo
MemTotal:      529178648 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 0
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12"
VERSION_ID="12"
PRETTY_NAME="SUSE Linux Enterprise Server 12"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12"
```

```
uname -a:
Linux linux-wzg5 3.12.28-4-default #1 SMP Thu Sep 25 17:02:34 UTC 2014
(9879bd4) x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 May 21 00:00

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp2006 = 99.7

ProLiant BL660c Gen9
(2.10 GHz, Intel Xeon E5-4650 v3)

SPECfp_base2006 = 94.0

CPU2006 license: 3

Test date: May-2015

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2015

Tested by: Hewlett-Packard Company

Software Availability: Oct-2014

Platform Notes (Continued)

SPEC is set to: /root/cpu2006

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sdb4	xfs	300G	8.8G	292G	3%	/

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HP I38 03/05/2015

Memory:

32x HP 752369-081 16 GB 2 rank 2133 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH = "/root/cpu2006/libs/32:/root/cpu2006/libs/64:/root/cpu2006/sh"

OMP_NUM_THREADS = "48"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp2006 = 99.7

ProLiant BL660c Gen9
(2.10 GHz, Intel Xeon E5-4650 v3)

SPECfp_base2006 = 94.0

CPU2006 license: 3

Test date: May-2015

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2015

Tested by: Hewlett-Packard Company

Software Availability: Oct-2014

Base Portability Flags (Continued)

```

434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

```

Peak Compiler Invocation

C benchmarks:

```

icc -m64

```

C++ benchmarks:

```

icpc -m64

```

Fortran benchmarks:

```

ifort -m64

```

Benchmarks using both Fortran and C:

```

icc -m64 ifort -m64

```



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp2006 = 99.7

ProLiant BL660c Gen9
(2.10 GHz, Intel Xeon E5-4650 v3)

SPECfp_base2006 = 94.0

CPU2006 license: 3

Test date: May-2015

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2015

Tested by: Hewlett-Packard Company

Software Availability: Oct-2014

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32 -ansi-alias

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-inline-calloc -opt-malloc-options=3 -auto -unroll4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp2006 = 99.7

ProLiant BL660c Gen9
(2.10 GHz, Intel Xeon E5-4650 v3)

SPECfp_base2006 = 94.0

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: May-2015
Hardware Availability: Jun-2015
Software Availability: Oct-2014

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Jun 17 10:50:19 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 16 June 2015.