



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Fujitsu

SPECfp<sup>®</sup>2006 = **68.7**

CELSIUS C740, Intel Xeon E5-1607 v3, 3.1 GHz

SPECfp\_base2006 = **67.5**

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jun-2015

Hardware Availability: May-2015

Software Availability: Sep-2014

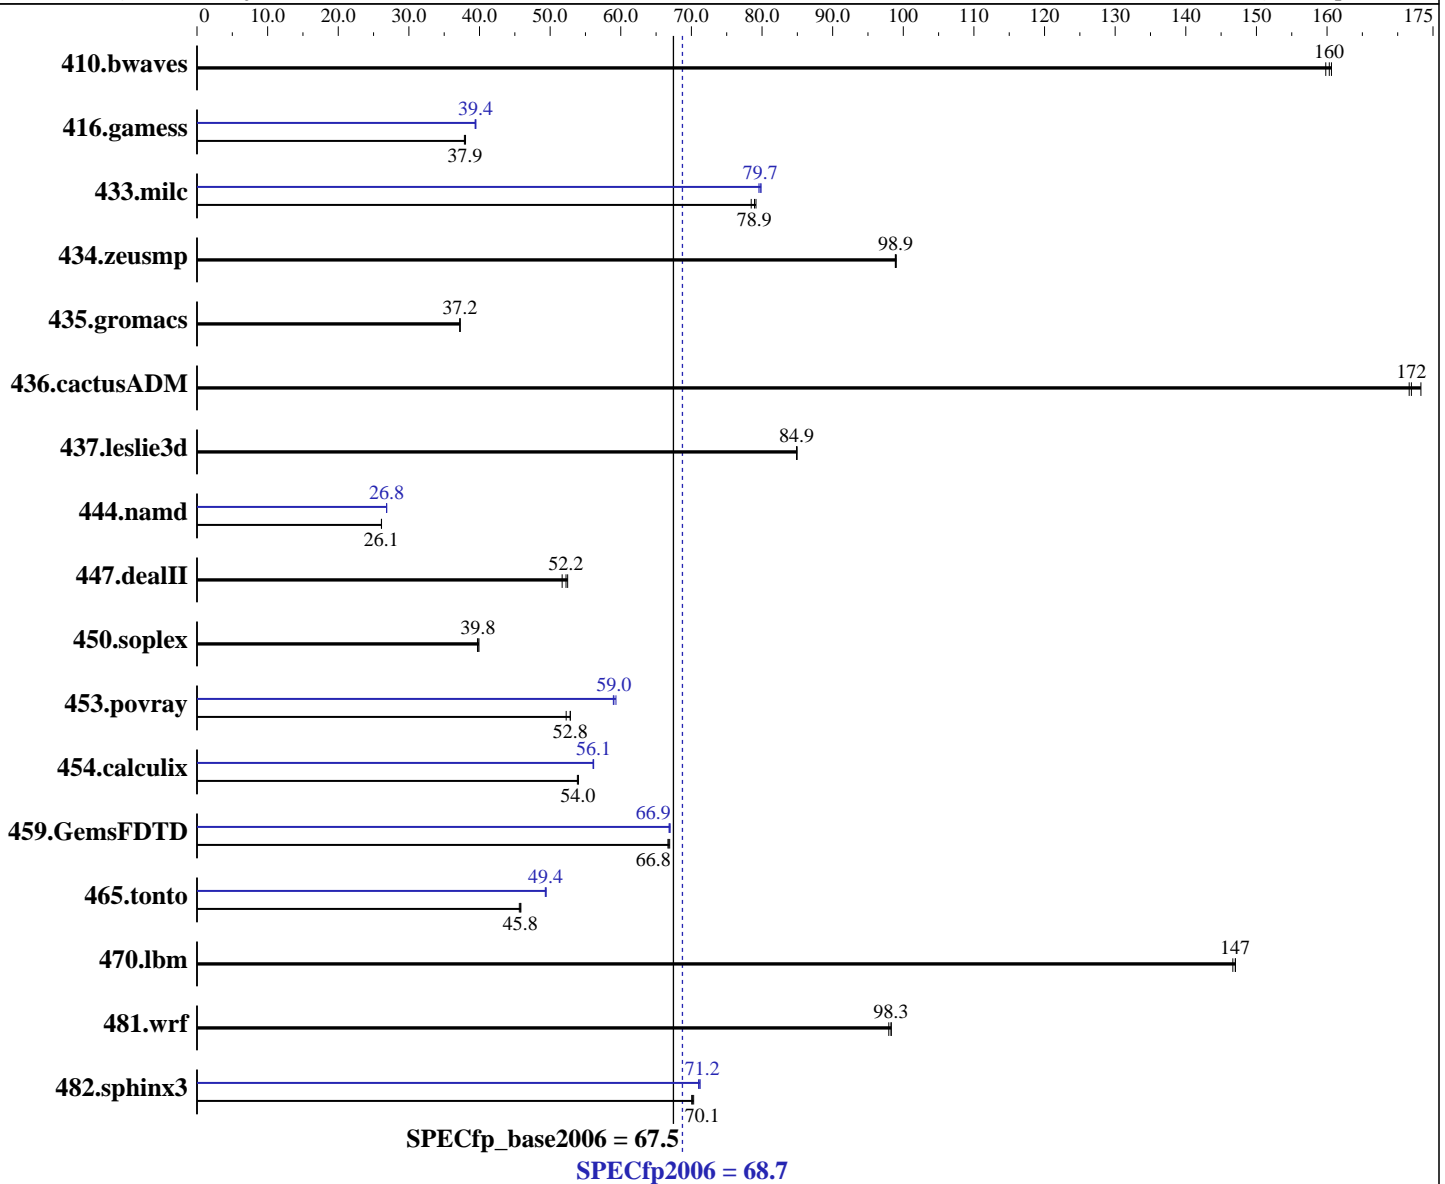

### Hardware

CPU Name: Intel Xeon E5-1607 v3  
 CPU Characteristics:  
 CPU MHz: 3100  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 7.1 (Maipo)  
 Kernel 3.10.0-229.el7.x86\_64  
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;  
 Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: xfs

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Fujitsu

SPECfp2006 = **68.7**

CELSIUS C740, Intel Xeon E5-1607 v3, 3.1 GHz

SPECfp\_base2006 = **67.5**

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jun-2015

Hardware Availability: May-2015

Software Availability: Sep-2014

L3 Cache: 10 MB I+D on chip per chip  
Other Cache: None  
Memory: 128 GB (8 x 16 GB 2Rx4 PC4-2133P-R, running at 1866 MHz)  
Disk Subsystem: 1 x SATA, 500 GB, 7200 RPM  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	85.0	160	<b>84.8</b>	<b>160</b>	84.6	161	85.0	160	<b>84.8</b>	<b>160</b>	84.6	161
416.gamess	517	37.9	515	38.0	<b>516</b>	<b>37.9</b>	497	39.4	<b>497</b>	<b>39.4</b>	496	39.5
433.milc	116	79.1	<b>116</b>	<b>78.9</b>	117	78.5	115	79.6	115	79.9	<b>115</b>	<b>79.7</b>
434.zeusmp	92.0	98.9	91.9	99.0	<b>92.0</b>	<b>98.9</b>	92.0	98.9	91.9	99.0	<b>92.0</b>	<b>98.9</b>
435.gromacs	192	37.2	192	37.3	<b>192</b>	<b>37.2</b>	192	37.2	192	37.3	<b>192</b>	<b>37.2</b>
436.cactusADM	69.6	172	69.0	173	<b>69.5</b>	<b>172</b>	69.6	172	69.0	173	<b>69.5</b>	<b>172</b>
437.leslie3d	111	84.9	<b>111</b>	<b>84.9</b>	111	85.0	111	84.9	<b>111</b>	<b>84.9</b>	111	85.0
444.namd	307	26.1	307	26.1	<b>307</b>	<b>26.1</b>	299	26.9	<b>299</b>	<b>26.8</b>	299	26.8
447.dealII	<b>219</b>	<b>52.2</b>	221	51.7	218	52.5	<b>219</b>	<b>52.2</b>	221	51.7	218	52.5
450.soplex	<b>210</b>	<b>39.8</b>	210	39.7	209	39.9	<b>210</b>	<b>39.8</b>	210	39.7	209	39.9
453.povray	102	52.3	101	52.9	<b>101</b>	<b>52.8</b>	90.2	58.9	89.7	59.3	<b>90.1</b>	<b>59.0</b>
454.calculix	<b>153</b>	<b>54.0</b>	153	54.0	153	53.9	147	56.2	<b>147</b>	<b>56.1</b>	147	56.1
459.GemsFDTD	159	66.9	159	66.7	<b>159</b>	<b>66.8</b>	158	67.0	159	66.8	<b>159</b>	<b>66.9</b>
465.tonto	<b>215</b>	<b>45.8</b>	215	45.9	216	45.6	<b>199</b>	<b>49.4</b>	200	49.3	199	49.4
470.lbm	<b>93.5</b>	<b>147</b>	93.7	147	93.5	147	<b>93.5</b>	<b>147</b>	93.7	147	93.5	147
481.wrf	114	97.9	114	98.3	<b>114</b>	<b>98.3</b>	114	97.9	114	98.3	<b>114</b>	<b>98.3</b>
482.sphinx3	277	70.3	<b>278</b>	<b>70.1</b>	278	70.0	274	71.2	274	71.0	<b>274</b>	<b>71.2</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration: default

## General Notes

Environment variables set by runspec before the start of the run:  
KMP\_AFFINITY = "granularity=fine,compact,1,0"  
LD\_LIBRARY\_PATH = "/home/SPECcpu2006/libs/32:/home/SPECcpu2006/libs/64:/home/SPECcpu2006/sh"  
OMP\_NUM\_THREADS = "2"

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp2006 = 68.7**

CELSIUS C740, Intel Xeon E5-1607 v3, 3.1 GHz

**SPECfp\_base2006 = 67.5**

CPU2006 license: 19

Test date: Jun-2015

Test sponsor: Fujitsu

Hardware Availability: May-2015

Tested by: Fujitsu

Software Availability: Sep-2014

## General Notes (Continued)

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

For information about Fujitsu please visit: <http://www.fujitsu.com>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch  
-ansi-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp2006 = 68.7**

CELSIUS C740, Intel Xeon E5-1607 v3, 3.1 GHz

**SPECfp\_base2006 = 67.5**

CPU2006 license: 19

Test date: Jun-2015

Test sponsor: Fujitsu

Hardware Availability: May-2015

Tested by: Fujitsu

Software Availability: Sep-2014

## Base Optimization Flags (Continued)

C++ benchmarks:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias`

Fortran benchmarks:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch`

Benchmarks using both Fortran and C:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch  
-ansi-alias`

## Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32 -ansi-alias`

470.lbm: `basepeak = yes`

482.sphinx3: `-xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
-parallel`

C++ benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp2006 = 68.7**

**CELSIUS C740, Intel Xeon E5-1607 v3, 3.1 GHz**

**SPECfp\_base2006 = 67.5**

**CPU2006 license:** 19

**Test date:** Jun-2015

**Test sponsor:** Fujitsu

**Hardware Availability:** May-2015

**Tested by:** Fujitsu

**Software Availability:** Sep-2014

## Peak Optimization Flags (Continued)

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
-ansi-alias

### Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-inline-calloc -opt-malloc-options=3 -auto -unroll4

### Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-HSW-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-HSW-RevA.xml>



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Fujitsu

SPECfp2006 = 68.7

CELSIUS C740, Intel Xeon E5-1607 v3, 3.1 GHz

SPECfp\_base2006 = 67.5

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jun-2015

Hardware Availability: May-2015

Software Availability: Sep-2014

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Jun 30 16:16:15 2015 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 30 June 2015.