



SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp®2006 = 104

Huawei 5288 V3 (Intel Xeon E5-2660 v3)

SPECfp_base2006 = 104

CPU2006 license: 3175


Test date: Jul-2015

Test sponsor: Huawei

Hardware Availability: Sep-2014

Tested by: Huawei

Software Availability: Sep-2014

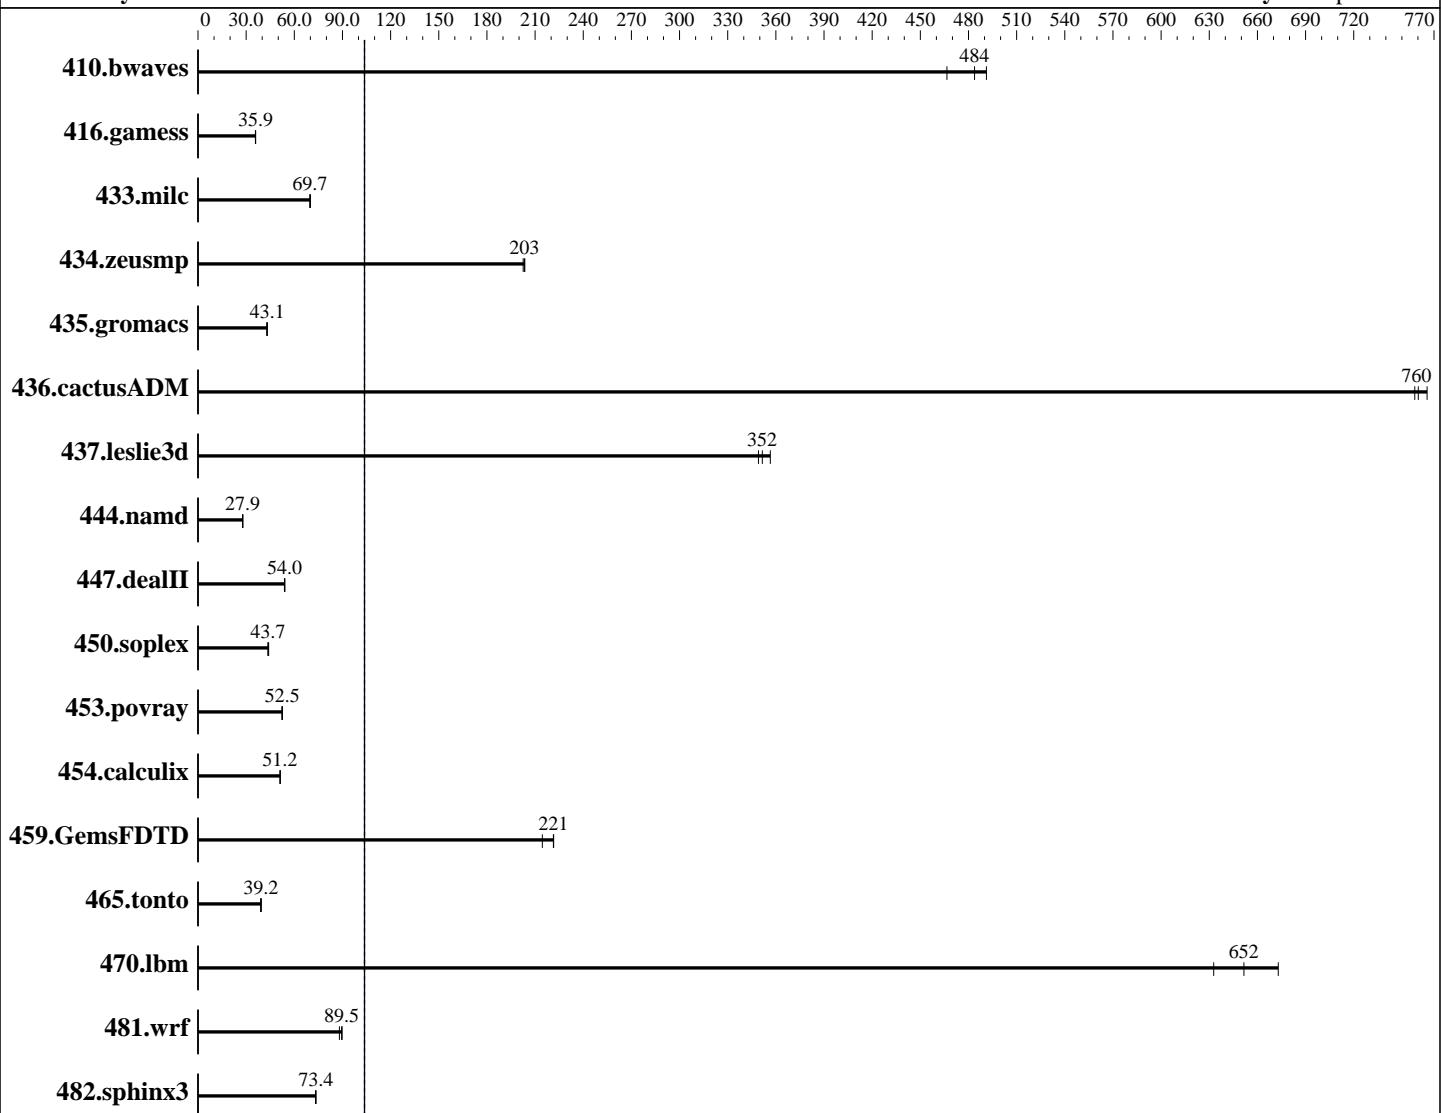

SPECfp_base2006 = 104

SPECfp2006 = 104

Hardware

CPU Name: Intel Xeon E5-2660 v3
CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz
CPU MHz: 2600
FPU: Integrated
CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip
CPU(s) orderable: 1,2 chip
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)
Compiler: 3.10.0-123.el7.x86_64
C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;
Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux
Auto Parallel: Yes
File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 104

Huawei 5288 V3 (Intel Xeon E5-2660 v3)

SPECfp_base2006 = 104

CPU2006 license: 3175

Test date: Jul-2015

Test sponsor: Huawei

Hardware Availability: Sep-2014

Tested by: Huawei

Software Availability: Sep-2014

L3 Cache: 25 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	29.1	467	27.7	491	<u>28.1</u>	<u>484</u>	29.1	467	27.7	491	<u>28.1</u>	<u>484</u>
416.gamess	<u>546</u>	<u>35.9</u>	547	35.8	546	35.9	<u>546</u>	<u>35.9</u>	547	35.8	546	35.9
433.milc	131	70.0	<u>132</u>	<u>69.7</u>	132	69.7	<u>131</u>	<u>70.0</u>	<u>132</u>	<u>69.7</u>	132	69.7
434.zeusmp	44.7	204	<u>44.7</u>	<u>203</u>	44.9	203	<u>44.7</u>	<u>204</u>	<u>44.7</u>	<u>203</u>	44.9	203
435.gromacs	<u>166</u>	<u>43.1</u>	166	43.1	167	42.8	<u>166</u>	<u>43.1</u>	166	43.1	167	42.8
436.cactusADM	<u>15.7</u>	<u>760</u>	15.8	758	15.6	766	<u>15.7</u>	<u>760</u>	15.8	758	15.6	766
437.leslie3d	26.9	349	26.4	357	<u>26.7</u>	<u>352</u>	26.9	349	26.4	357	<u>26.7</u>	<u>352</u>
444.namd	<u>288</u>	<u>27.9</u>	288	27.9	288	27.9	<u>288</u>	<u>27.9</u>	288	27.9	288	27.9
447.dealII	<u>212</u>	<u>54.0</u>	212	53.9	212	54.1	<u>212</u>	<u>54.0</u>	212	53.9	212	54.1
450.soplex	191	43.6	190	44.0	<u>191</u>	<u>43.7</u>	191	43.6	190	44.0	<u>191</u>	<u>43.7</u>
453.povray	<u>101</u>	<u>52.5</u>	102	52.3	101	52.6	<u>101</u>	<u>52.5</u>	102	52.3	101	52.6
454.calculix	<u>161</u>	<u>51.2</u>	161	51.2	161	51.1	<u>161</u>	<u>51.2</u>	161	51.2	161	51.1
459.GemsFDTD	<u>47.9</u>	<u>221</u>	47.9	222	49.5	215	<u>47.9</u>	<u>221</u>	47.9	222	49.5	215
465.tonto	<u>251</u>	<u>39.2</u>	250	39.4	252	39.0	<u>251</u>	<u>39.2</u>	250	39.4	252	39.0
470.lbm	<u>21.1</u>	<u>652</u>	21.7	633	20.4	673	<u>21.1</u>	<u>652</u>	21.7	633	20.4	673
481.wrf	124	89.8	127	88.1	<u>125</u>	<u>89.5</u>	124	89.8	127	88.1	<u>125</u>	<u>89.5</u>
482.sphinx3	265	73.5	<u>265</u>	<u>73.4</u>	266	73.2	<u>265</u>	<u>73.5</u>	<u>265</u>	<u>73.4</u>	266	73.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:

Set Power Efficiency Mode to Custom

Set Snoop Mode to HS mode

Set Patrol Scrub to Disable

Set Hyper-Threading to Disable

Sysinfo program /spec/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date::: 2014-06-25 #\$ e3fb8667b5a285932ceab81e28219e1
running on localhost.localdomain Thu Jul 30 05:14:26 2015

This section contains SUT (System Under Test) info as seen by
Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 =

104

Huawei 5288 V3 (Intel Xeon E5-2660 v3)

SPECfp_base2006 =

104

CPU2006 license: 3175

Test date: Jul-2015

Test sponsor: Huawei

Hardware Availability: Sep-2014

Tested by: Huawei

Software Availability: Sep-2014

Platform Notes (Continued)

some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2660 v3 @ 2.60GHz
        2 "physical id"s (chips)
        20 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The
    following excerpts from /proc/cpuinfo might not be reliable. Use with
    caution.)
        cpu cores : 10
        siblings : 10
        physical 0: cores 0 1 2 3 4 8 9 10 11 12
        physical 1: cores 0 1 2 3 4 8 9 10 11 12
    cache size : 25600 KB
```

```
From /proc/meminfo
    MemTotal:      263578912 kB
    HugePages_Total:       0
    Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
    NAME="Red Hat Enterprise Linux Server"
    VERSION="7.0 (Maipo)"
    ID="rhel"
    ID_LIKE="fedora"
    VERSION_ID="7.0"
    PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
    ANSI_COLOR="0;31"
    CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server
```

```
uname -a:
Linux localhost.localdomain 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57
EDT 2014 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jul 29 06:38
```

```
SPEC is set to: /spec
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdal      ext4  385G  8.2G  357G   3% /
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Insyde Corp. 1.50 05/26/2015

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 104

Huawei 5288 V3 (Intel Xeon E5-2660 v3)

SPECfp_base2006 = 104

CPU2006 license: 3175

Test date: Jul-2015

Test sponsor: Huawei

Hardware Availability: Sep-2014

Tested by: Huawei

Software Availability: Sep-2014

Platform Notes (Continued)

Memory:

8x Micron 36ASF2G72PZ-2G1A2 16 GB 1 rank 2133 MHz
8x Micron 36ASF2G72PZ-2G1A2 16 GB 2 rank 2133 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,1,0"

LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64:/spec/sh"

OMP_NUM_THREADS = "20"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 104

Huawei 5288 V3 (Intel Xeon E5-2660 v3)

SPECfp_base2006 = 104

CPU2006 license: 3175

Test date: Jul-2015

Test sponsor: Huawei

Hardware Availability: Sep-2014

Tested by: Huawei

Software Availability: Sep-2014

Base Portability Flags (Continued)

```
453.povray: -DSPEC_CPU_LP64  
454.calculix: -DSPEC_CPU_LP64 -nofor_main  
459.GemsFDTD: -DSPEC_CPU_LP64  
465.tonto: -DSPEC_CPU_LP64  
470.lbm: -DSPEC_CPU_LP64  
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX  
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch  
-ansi-alias
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch  
-ansi-alias
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Peak Portability Flags

Same as Base Portability Flags



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 =

104

Huawei 5288 V3 (Intel Xeon E5-2660 v3)

SPECfp_base2006 =

104

CPU2006 license: 3175

Test date: Jul-2015

Test sponsor: Huawei

Hardware Availability: Sep-2014

Tested by: Huawei

Software Availability: Sep-2014

Peak Optimization Flags

C benchmarks:

```
433.milc: basepeak = yes  
470.lbm: basepeak = yes  
482.sphinx3: basepeak = yes
```

C++ benchmarks:

```
444.namd: basepeak = yes  
447.dealII: basepeak = yes  
450.soplex: basepeak = yes  
453.povray: basepeak = yes
```

Fortran benchmarks:

```
410.bwaves: basepeak = yes  
416.gamess: basepeak = yes  
434.zeusmp: basepeak = yes  
437.leslie3d: basepeak = yes  
459.GemsFDTD: basepeak = yes  
465.tonto: basepeak = yes
```

Benchmarks using both Fortran and C:

```
435.gromacs: basepeak = yes  
436.cactusADM: basepeak = yes  
454.calculix: basepeak = yes  
481.wrf: basepeak = yes
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-HASWELL-V1.4.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-HASWELL-V1.4.xml>



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 104

Huawei 5288 V3 (Intel Xeon E5-2660 v3)

SPECfp_base2006 = 104

CPU2006 license: 3175

Test date: Jul-2015

Test sponsor: Huawei

Hardware Availability: Sep-2014

Tested by: Huawei

Software Availability: Sep-2014

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Aug 25 17:52:28 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 25 August 2015.