



# SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Supermicro

SuperWorkstation 5029A-iL  
(X11SAE , Intel Xeon E3-1280 v5)

SPECfp®2006 = 97.2

SPECfp\_base2006 = 94.6

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Nov-2015

Hardware Availability: Oct-2015

Software Availability: Sep-2015

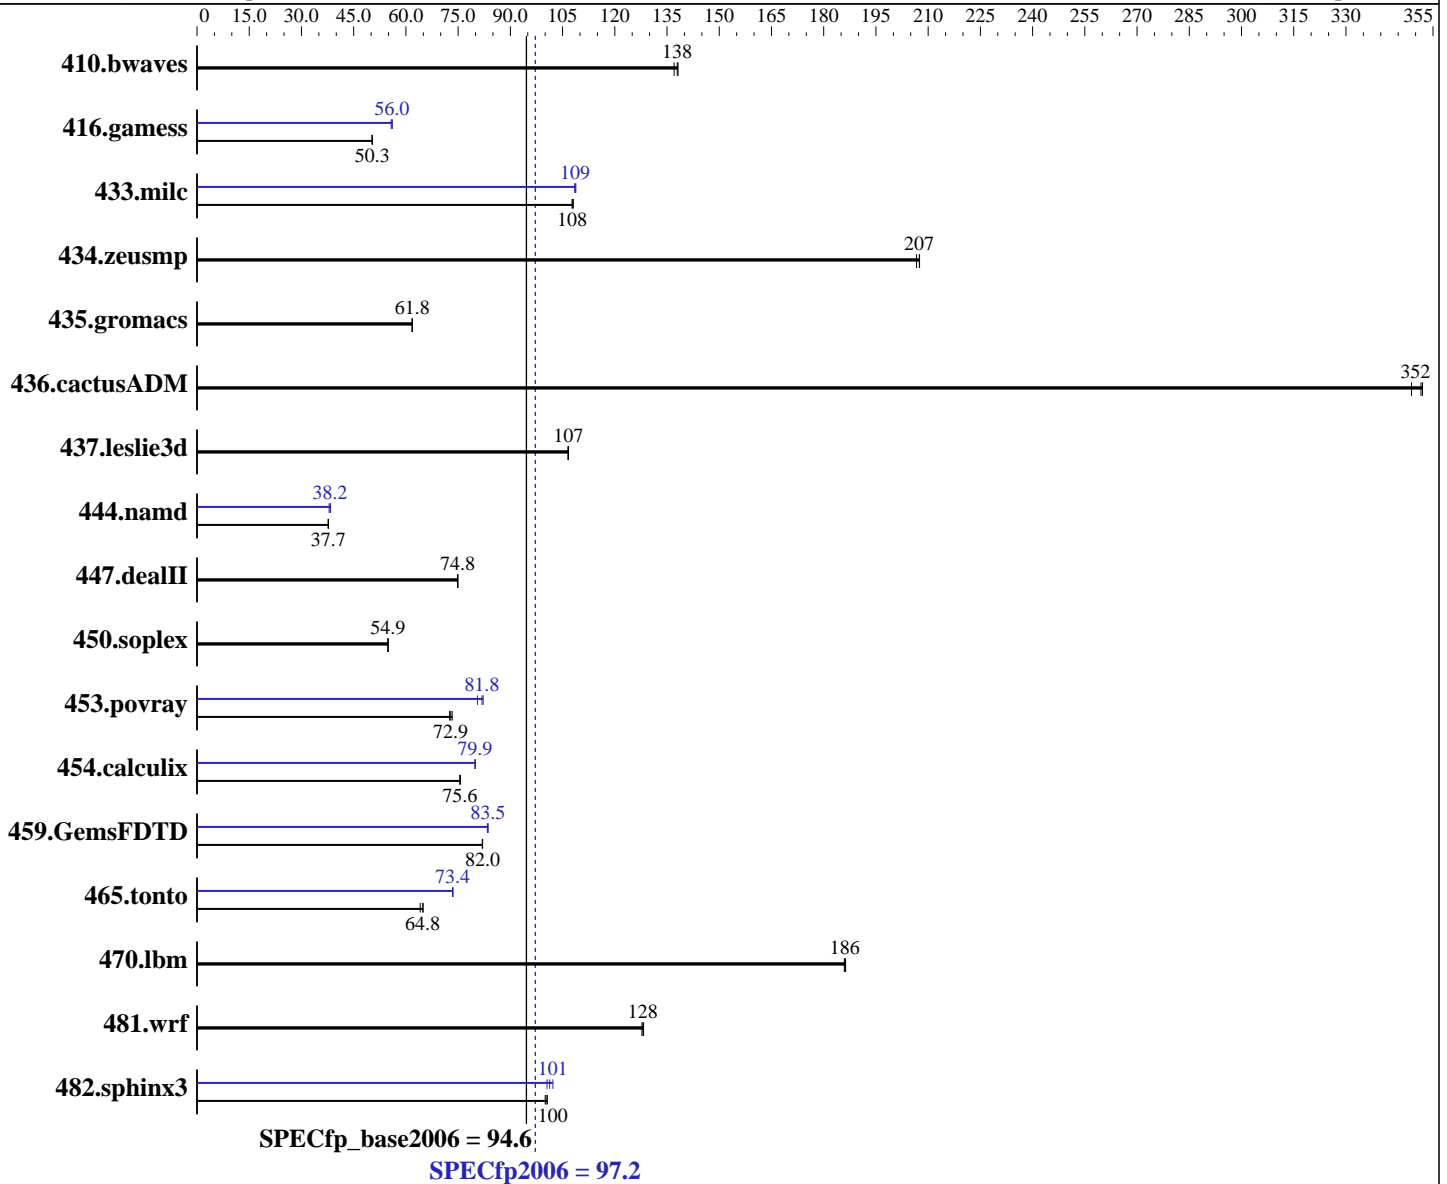

### Hardware

CPU Name: Intel Xeon E3-1280 v5  
 CPU Characteristics: Intel Turbo Boost Technology up to 4.00 GHz  
 CPU MHz: 3700  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 7.1 (Maipo)  
 3.10.0-229.el7.x86\_64  
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;  
 Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: xfs

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Supermicro

SuperWorkstation 5029A-iL  
(X11SAE , Intel Xeon E3-1280 v5)

SPECfp2006 = **97.2**

SPECfp\_base2006 = **94.6**

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Nov-2015

Hardware Availability: Oct-2015

Software Availability: Sep-2015

L3 Cache: 8 MB I+D on chip per chip  
Other Cache: None  
Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2133P-E)  
Disk Subsystem: 1 x 1000 GB SATA III, 7200 RPM  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	99.2	137	98.4	138	<b>98.5</b>	<b>138</b>	99.2	137	98.4	138	<b>98.5</b>	<b>138</b>
416.gamess	<b>389</b>	<b>50.3</b>	389	50.3	389	50.3	349	56.1	<b>349</b>	<b>56.0</b>	351	55.8
433.milc	84.9	108	85.2	108	<b>85.2</b>	<b>108</b>	84.4	109	<b>84.5</b>	<b>109</b>	84.6	108
434.zeusmp	43.8	208	44.0	207	<b>43.9</b>	<b>207</b>	43.8	208	44.0	207	<b>43.9</b>	<b>207</b>
435.gromacs	116	61.8	<b>115</b>	<b>61.8</b>	115	61.8	116	61.8	<b>115</b>	<b>61.8</b>	115	61.8
436.cactusADM	33.9	352	<b>34.0</b>	<b>352</b>	34.3	349	33.9	352	<b>34.0</b>	<b>352</b>	34.3	349
437.leslie3d	88.2	107	<b>88.1</b>	<b>107</b>	88.1	107	88.2	107	<b>88.1</b>	<b>107</b>	88.1	107
444.namd	212	37.7	213	37.7	<b>213</b>	<b>37.7</b>	<b>210</b>	<b>38.2</b>	209	38.4	211	37.9
447.dealII	153	74.8	<b>153</b>	<b>74.8</b>	153	75.0	153	74.8	<b>153</b>	<b>74.8</b>	153	75.0
450.soplex	<b>152</b>	<b>54.9</b>	152	54.8	152	54.9	<b>152</b>	<b>54.9</b>	152	54.8	152	54.9
453.povray	73.3	72.5	72.6	73.3	<b>73.0</b>	<b>72.9</b>	64.7	82.2	<b>65.0</b>	<b>81.8</b>	66.0	80.5
454.calculix	109	75.5	109	75.7	<b>109</b>	<b>75.6</b>	103	79.9	<b>103</b>	<b>79.9</b>	103	79.8
459.GemsFDTD	129	82.0	129	81.9	<b>129</b>	<b>82.0</b>	127	83.4	127	83.6	<b>127</b>	<b>83.5</b>
465.tonto	152	64.9	153	64.1	<b>152</b>	<b>64.8</b>	134	73.5	<b>134</b>	<b>73.4</b>	134	73.4
470.lbm	73.8	186	<b>73.8</b>	<b>186</b>	73.9	186	73.8	186	<b>73.8</b>	<b>186</b>	73.9	186
481.wrf	87.1	128	87.4	128	<b>87.2</b>	<b>128</b>	87.1	128	87.4	128	<b>87.2</b>	<b>128</b>
482.sphinx3	194	101	<b>194</b>	<b>100</b>	195	100	191	102	<b>192</b>	<b>101</b>	194	101

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:  
Hyper-threading = Disabled  
Sysinfo program /home/cpu2006/config/sysinfo.rev6914  
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1  
running on localhost.localdomain Thu Nov 12 02:16:35 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Supermicro

SuperWorkstation 5029A-iL  
(X11SAE , Intel Xeon E3-1280 v5)

SPECfp2006 = 97.2

SPECfp\_base2006 = 94.6

**CPU2006 license:** 001176  
**Test sponsor:** Supermicro  
**Tested by:** Supermicro

**Test date:** Nov-2015  
**Hardware Availability:** Oct-2015  
**Software Availability:** Sep-2015

### Platform Notes (Continued)

```

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E3-1280 v5 @ 3.70GHz
 1 "physical id"s (chips)
 4 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 4
  siblings  : 4
  physical 0: cores 0 1 2 3
  cache size : 8192 KB

```

```

From /proc/meminfo
MemTotal:      65622664 kB
HugePages_Total:    0
Hugepagesize:   2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.1 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.1"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.1 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.1:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.1:ga:server

```

```

uname -a:
Linux localhost.localdomain 3.10.0-229.el7.x86_64 #1 SMP Thu Jan 29 18:37:38
EST 2015 x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Nov 12 02:15

```

SPEC is set to: /home/cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs  850G  5.4G  844G   1% /home

```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```

BIOS American Megatrends Inc. 1.0 11/09/2015
Memory:
 4x Samsung M391A2K43BB1-CPB 16 GB 2 rank 2133 MHz

```

(End of data from sysinfo program)



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Supermicro

SuperWorkstation 5029A-iL  
(X11SAE , Intel Xeon E3-1280 v5)

SPECfp2006 = 97.2

SPECfp\_base2006 = 94.6

**CPU2006 license:** 001176  
**Test sponsor:** Supermicro  
**Tested by:** Supermicro

**Test date:** Nov-2015  
**Hardware Availability:** Oct-2015  
**Software Availability:** Sep-2015

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,1,0"

LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

OMP\_NUM\_THREADS = "4"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB  
memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Supermicro

SuperWorkstation 5029A-iL  
(X11SAE , Intel Xeon E3-1280 v5)

SPECfp2006 = 97.2

SPECfp\_base2006 = 94.6

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Nov-2015  
Hardware Availability: Oct-2015  
Software Availability: Sep-2015

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch  
-ansi-alias

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch  
-ansi-alias

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32 -ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
-parallel

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Supermicro

SuperWorkstation 5029A-iL  
(X11SAE , Intel Xeon E3-1280 v5)

SPECfp2006 = 97.2

SPECfp\_base2006 = 94.6

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Nov-2015

Hardware Availability: Oct-2015

Software Availability: Sep-2015

## Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revG.20141230.00.html>



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Supermicro

SuperWorkstation 5029A-iL  
(X11SAE , Intel Xeon E3-1280 v5)

SPECfp2006 = 97.2

SPECfp\_base2006 = 94.6

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Nov-2015

**Hardware Availability:** Oct-2015

**Software Availability:** Sep-2015

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revG.20141230.00.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Wed Dec 16 10:39:38 2015 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 15 December 2015.