



SPEC[®] CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp[®]2006 = 93.4

Express5800/T110h-S (Intel Xeon E3-1220 v5)

SPECfp_base2006 = 91.4

CPU2006 license: 9006


Test date: Dec-2015

Test sponsor: NEC Corporation

Hardware Availability: Mar-2016

Tested by: NEC Corporation

Software Availability: Nov-2015

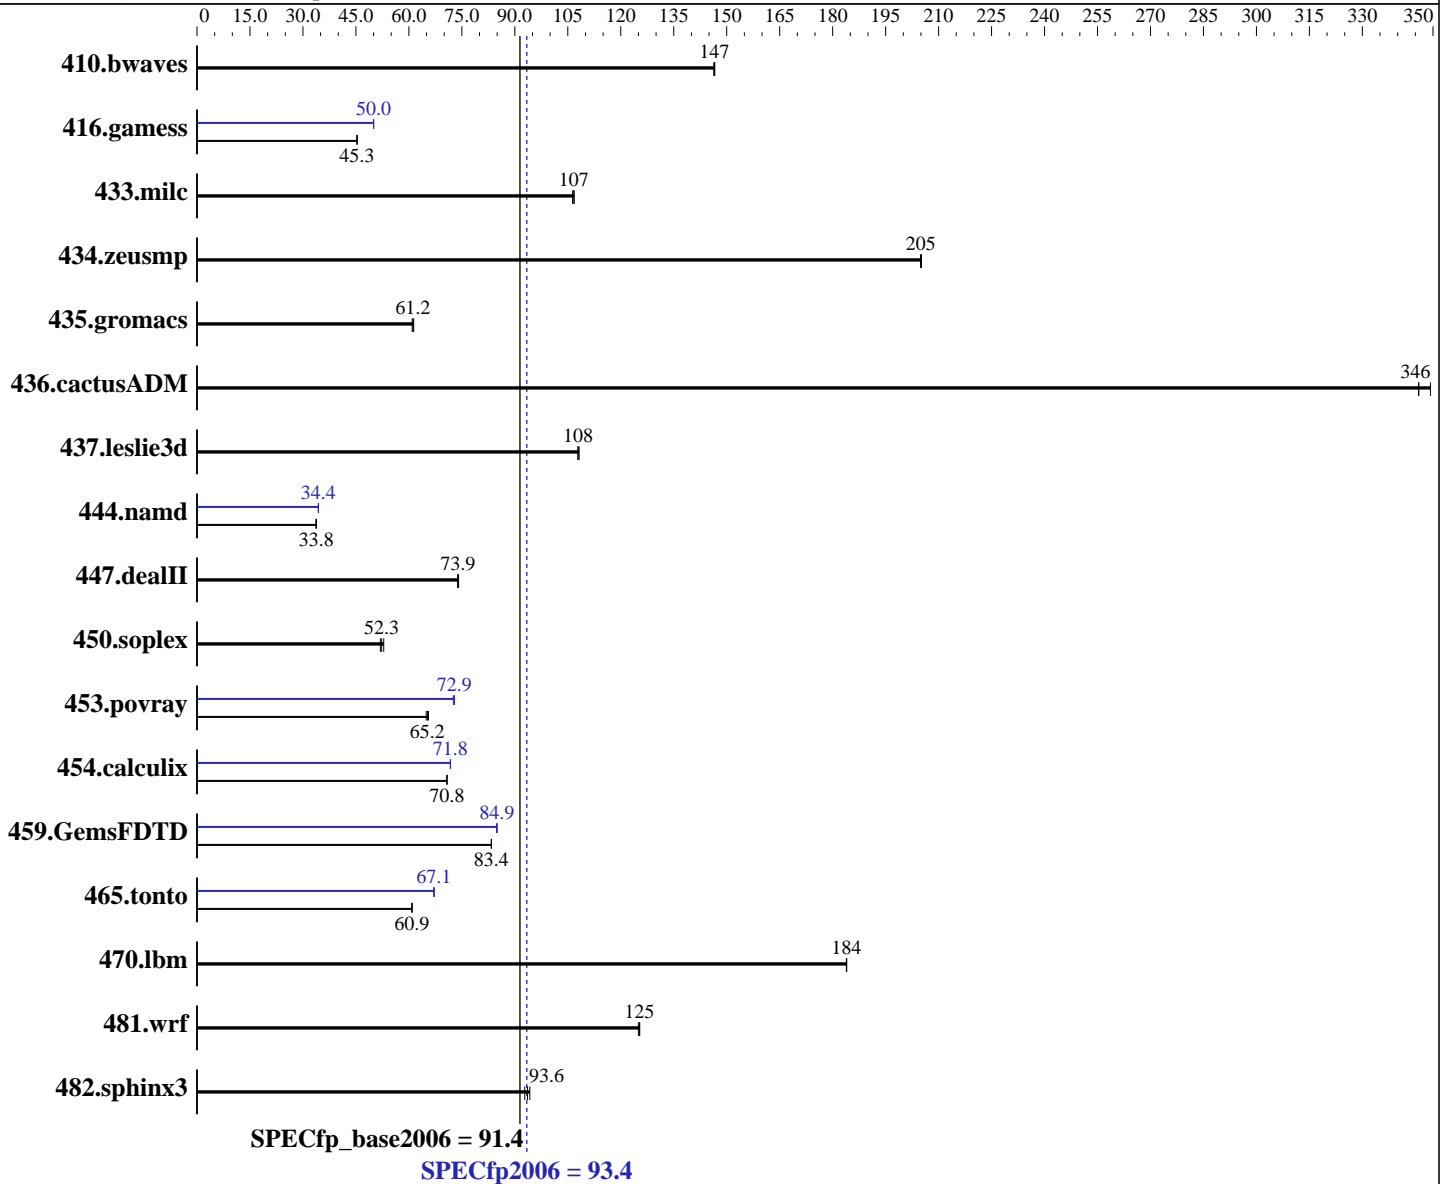

Hardware

CPU Name: Intel Xeon E3-1220 v5
 CPU Characteristics: Intel Turbo Boost Technology up to 3.50 GHz
 CPU MHz: 3000
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 7.2 (Maipo)
 Kernel 3.10.0-327.el7.x86_64
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = **93.4**

Express5800/T110h-S (Intel Xeon E3-1220 v5)

SPECfp_base2006 = **91.4**

CPU2006 license: 9006

Test date: Dec-2015

Test sponsor: NEC Corporation

Hardware Availability: Mar-2016

Tested by: NEC Corporation

Software Availability: Nov-2015

L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 16 GB (2 x 8 GB 2Rx8 PC4-2133P-E)
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	92.7	147	92.9	146	92.7	147	92.7	147	92.9	146	92.7	147
416.gamess	432	45.3	432	45.3	432	45.4	392	50.0	391	50.0	391	50.0
433.milc	86.3	106	86.0	107	85.9	107	86.3	106	86.0	107	85.9	107
434.zeusmp	44.4	205	44.4	205	44.4	205	44.4	205	44.4	205	44.4	205
435.gromacs	117	61.2	117	60.9	116	61.4	117	61.2	117	60.9	116	61.4
436.cactusADM	34.5	346	34.5	346	34.2	349	34.5	346	34.5	346	34.2	349
437.leslie3d	87.2	108	86.9	108	87.1	108	87.2	108	86.9	108	87.1	108
444.namd	238	33.8	238	33.7	238	33.8	233	34.4	233	34.4	233	34.4
447.dealII	155	73.9	154	74.1	155	73.8	155	73.9	154	74.1	155	73.8
450.soplex	158	52.9	161	51.9	159	52.3	158	52.9	161	51.9	159	52.3
453.povray	81.5	65.2	82.0	64.9	81.2	65.5	73.0	72.9	73.3	72.6	73.0	72.9
454.calculix	117	70.8	117	70.8	117	70.8	115	71.8	115	71.8	115	71.7
459.GemsFDTD	127	83.4	127	83.4	127	83.4	125	84.9	125	85.0	125	84.9
465.tonto	162	60.9	162	60.9	162	60.9	147	67.1	147	67.2	147	67.1
470.lbm	74.7	184	74.7	184	74.7	184	74.7	184	74.7	184	74.7	184
481.wrf	89.4	125	89.1	125	89.1	125	89.4	125	89.1	125	89.1	125
482.sphinx3	207	94.2	208	93.6	210	92.8	207	94.2	208	93.6	210	92.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:
 Power Management Policy: Custom
 Energy Performance: Performance

General Notes

Environment variables set by runspec before the start of the run:
 KMP_AFFINITY = "granularity=fine,compact,1,0"
 LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = 93.4

Express5800/T110h-S (Intel Xeon E3-1220 v5)

SPECfp_base2006 = 91.4

CPU2006 license: 9006

Test date: Dec-2015

Test sponsor: NEC Corporation

Hardware Availability: Mar-2016

Tested by: NEC Corporation

Software Availability: Nov-2015

General Notes (Continued)

OMP_NUM_THREADS = "4"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = 93.4

Express5800/T110h-S (Intel Xeon E3-1220 v5)

SPECfp_base2006 = 91.4

CPU2006 license: 9006

Test date: Dec-2015

Test sponsor: NEC Corporation

Hardware Availability: Mar-2016

Tested by: NEC Corporation

Software Availability: Nov-2015

Base Optimization Flags (Continued)

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -fno-alias
-auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = 93.4

Express5800/T110h-S (Intel Xeon E3-1220 v5)

SPECfp_base2006 = 91.4

CPU2006 license: 9006

Test date: Dec-2015

Test sponsor: NEC Corporation

Hardware Availability: Mar-2016

Tested by: NEC Corporation

Software Availability: Nov-2015

Peak Optimization Flags (Continued)

447.deallI: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-110h-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-110h-RevA.xml>



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = 93.4

Express5800/T110h-S (Intel Xeon E3-1220 v5)

SPECfp_base2006 = 91.4

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Dec-2015

Hardware Availability: Mar-2016

Software Availability: Nov-2015

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Feb 9 17:22:04 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 9 February 2016.