SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS Q170M-C motherboard (Intel Core i7-6700T)

SPECfp®2006 = 87.4

SPECfp_base2006 = 85.8

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: May-2016
Hardware Availability: Aug-2015
Software Availability: Aug-2015

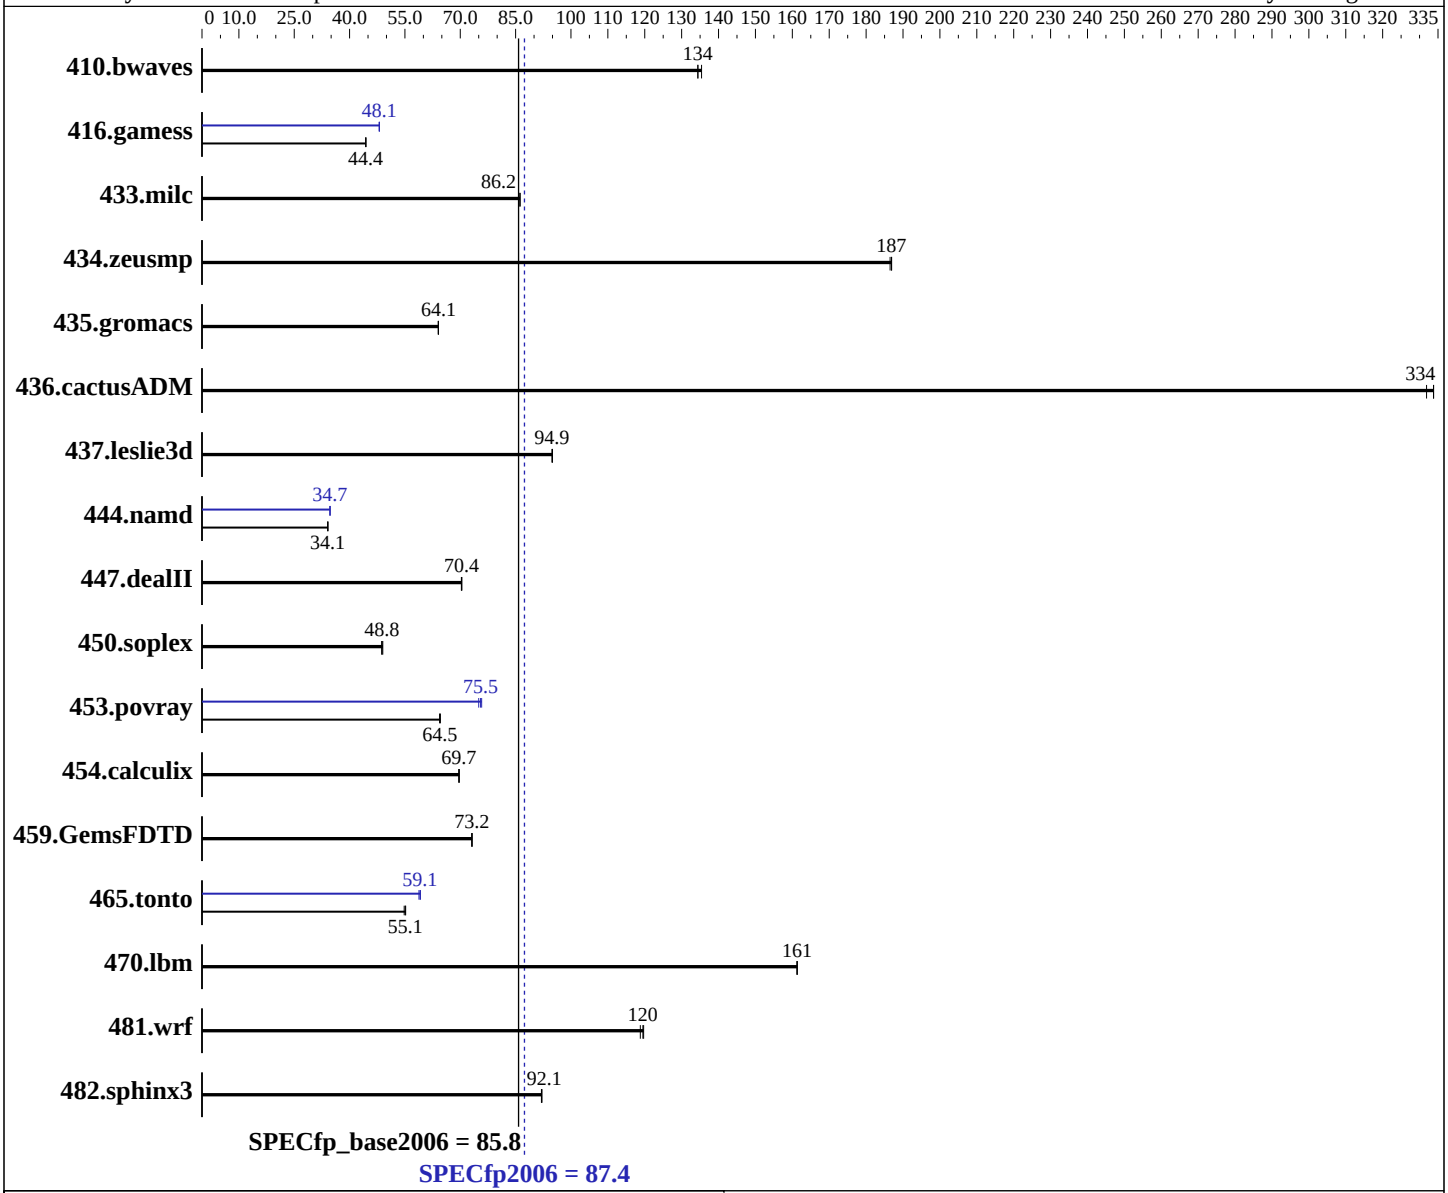

Hardware

CPU Name:	Intel Core i7-6700T
CPU Characteristics:	Intel Turbo Boost Technology up to 3.60 GHz
CPU MHz:	2800
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Microsoft Windows 7 Professional 6.1.7601 Service Pack 1 Build 7601
Compiler:	C/C++: Version 16.0.0.110 of Intel C++ Studio XE for Windows; Fortran: Version 16.0.0.110 of Intel Fortran Studio XE for Windows; Libraries: Version 18.00.30723 of Microsoft Visual Studio 2013
Auto Parallel:	Yes

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS Q170M-C motherboard (Intel Core i7-6700T)

SPECfp2006 = 87.4

SPECfp_base2006 = 85.8

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: May-2016
Hardware Availability: Aug-2015
Software Availability: Aug-2015

L3 Cache:	8 MB I+D on chip per chip
Other Cache:	None
Memory:	8 GB (2 x 4 GB 2Rx4 PC4-2133P-U)
Disk Subsystem:	1 TB Seagate Barracuda HDD, 7200 RPM
Other Hardware:	None

File System:	NTFS
System State:	Default
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap Library Version 11.0 from http://www.microquill.com/

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	**101**	**134**	101	134	100	135	**101**	**134**	101	134	100	135
416.gamess	**441**	**44.4**	441	44.4	441	44.4	408	48.0	407	48.1	**407**	**48.1**
433.milc	107	86.2	**107**	**86.2**	107	85.9	107	86.2	**107**	**86.2**	107	85.9
434.zeusmp	48.8	187	48.7	187	**48.7**	**187**	48.8	187	48.7	187	**48.7**	**187**
435.gromacs	112	64.0	111	64.1	**111**	**64.1**	112	64.0	111	64.1	**111**	**64.1**
436.cactusADM	35.8	334	**35.8**	**334**	36.0	332	35.8	334	**35.8**	**334**	36.0	332
437.leslie3d	**99.0**	**94.9**	99.0	94.9	98.9	95.0	**99.0**	**94.9**	99.0	94.9	98.9	95.0
444.namd	236	34.1	**236**	**34.1**	236	34.1	**231**	**34.7**	231	34.7	231	34.7
447.dealII	**163**	**70.4**	163	70.4	163	70.3	**163**	**70.4**	163	70.4	163	70.3
450.soplex	171	48.7	170	49.0	**171**	**48.8**	171	48.7	170	49.0	**171**	**48.8**
453.povray	82.6	64.4	**82.5**	**64.5**	82.4	64.6	70.2	75.8	**70.5**	**75.5**	70.9	75.0
454.calculix	119	69.6	118	69.7	**118**	**69.7**	119	69.6	118	69.7	**118**	**69.7**
459.GemsFDTD	145	73.1	145	73.2	**145**	**73.2**	145	73.1	145	73.2	**145**	**73.2**
465.tonto	179	54.8	178	55.2	**179**	**55.1**	167	58.8	166	59.2	**167**	**59.1**
470.lbm	85.2	161	**85.2**	**161**	85.2	161	85.2	161	**85.2**	**161**	85.2	161
481.wrf	93.3	120	**93.5**	**120**	94.0	119	93.3	120	**93.5**	**120**	94.0	119
482.sphinx3	212	92.1	212	92.0	**212**	**92.1**	212	92.1	212	92.0	**212**	**92.1**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

```
To compile these binaries, the Intel Compiler 16.0 was set up to
generate 64-bit binaries with the command:
"psxevars.bat intel64" (shortcut provided in the Intel(r)
Parallel Studio XE 2016 program folder)
```

Platform Notes

```
Sysinfo program C:\SPEC16.0/Docs/sysinfo
$Rev: 6775 $ $Date:: 2011-08-16 #$ \8787f7622badcf24e01c368b1db4377c
running on Clt2C56DC769A36 Tue May  3 20:51:06 2016

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
```

Continued on next page

Platform Notes (Continued)

```
      http://www.spec.org/cpu2006/Docs/config.html#sysinfo

    Trying 'systeminfo'
    OS Name        : Microsoft Windows 7 Professional
    OS Version     : 6.1.7601 Service Pack 1 Build 7601
    System Manufacturer: System manufacturer
    System Model   : System Product Name
    Processor(s)   : 1 Processor(s) Installed.
         [01]: Intel64 Family 6 Model 94 Stepping 3 GenuineIntel ~2801 Mhz
    BIOS Version   : American Megatrends Inc. 0704, 1/12/2016
    Total Physical Memory: 8,069 MB

    Trying 'wmic cpu get /value'
    DeviceID       : CPU0
    L2CacheSize    : 1024
    L3CacheSize    : 8192
    MaxClockSpeed : 2801
    Name           : Intel(R) Core(TM) i7-6700T CPU @ 2.80GHz
    NumberOfCores : 4
    NumberOfLogicalProcessors: 8

    (End of data from sysinfo program)
```

Component Notes

```
    Tested systems can be used with Shin-G ATX case,
    PC Power and Cooling 1200W power supply
```

General Notes

```
  450.soplex (base): "getline_test" src.alt was used.

  447.dealII (base): "max_prototype" src.alt was used.
  447.dealII (base): "cxx11_make_pair" src.alt was used.

  450.soplex (base): "getline_test" src.alt was used.

  447.dealII (base): "max_prototype" src.alt was used.
  447.dealII (base): "cxx11_make_pair" src.alt was used.

   OMP_NUM_THREADS set to number of processors cores
   KMP_AFFINITY set to granularity=fine,scatter
   Binaries compiled on a system with 1x Intel Xeon E5-2699 v3 CPU
   + 64GB memory using Windows 8.1 Enterprise 64-bit
```

Base Compiler Invocation

C benchmarks:
```
icl -Qvc12 -Qstd=c99
```

C++ benchmarks:
```
icl -Qvc12
```

Fortran benchmarks:
```
ifort
```

Benchmarks using both Fortran and C:
```
icl -Qvc12 -Qstd=c99 ifort
```

Base Portability Flags

```
    410.bwaves: -DSPEC_CPU_P64
    416.gamess: -DSPEC_CPU_P64
      433.milc: -DSPEC_CPU_P64
    434.zeusmp: -DSPEC_CPU_P64
    435.gromacs: -DSPEC_CPU_P64
436.cactusADM: -DSPEC_CPU_P64 -names:lowercase /assume:underscore
    437.leslie3d: -DSPEC_CPU_P64
      444.namd: -DSPEC_CPU_P64 /TP
     447.dealII: -DSPEC_CPU_P64 -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
                 -DSPEC_CPU_BOOST_CONFIG_MSC_VER -DSPEC_NEED_ALGORITHM
     450.soplex: -DSPEC_CPU_P64 -DSPEC_GETLINE_TEST
     453.povray: -DSPEC_CPU_P64
    454.calculix: -DSPEC_CPU_P64 -DSPEC_CPU_NOZMODIFIER -names:lowercase
459.GemsFDTD: -DSPEC_CPU_P64
      465.tonto: -DSPEC_CPU_P64
       470.lbm: -DSPEC_CPU_P64
       481.wrf: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
    482.sphinx3: -DSPEC_CPU_P64
```

Base Optimization Flags

C benchmarks:
```
-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias
-Qopt-prefetch /F1000000000
```

C++ benchmarks:
```
-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias
-Qopt-prefetch -Qcxx-features /F1000000000 shlW64M.lib
            -link /FORCE:MULTIPLE
```

Fortran benchmarks:
```
-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias
-Qopt-prefetch /F1000000000
```

Continued on next page

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:
-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias
-Qopt-prefetch /F1000000000

Peak Compiler Invocation

C benchmarks:
icl -Qvc12 -Qstd=c99

C++ benchmarks:
icl -Qvc12

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icl -Qvc12 -Qstd=c99 ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Oa /F1000000000 shlW64M.lib
-link /FORCE:MULTIPLE

447.dealII: basepeak = yes

450.soplex: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

453.povray: -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll4 -Qansi-alias /F1000000000 shlW64M.lib -link /FORCE:MULTIPLE

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll2 -Ob0 -Qansi-alias -Qscalar-rep- /F1000000000

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll4 -Qauto -Qinline-calloc /F1000000000

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-windows.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-windows.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Jul 12 11:02:21 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 12 July 2016.