



SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen9

(2.20 GHz, Intel Xeon E5-4650 v4)

SPECfp®2006 =

113

SPECfp_base2006 =

107

CPU2006 license: 3


Test sponsor: HPE

Tested by: HPE

Test date: Aug-2016

Hardware Availability: Jul-2016

Software Availability: Dec-2015

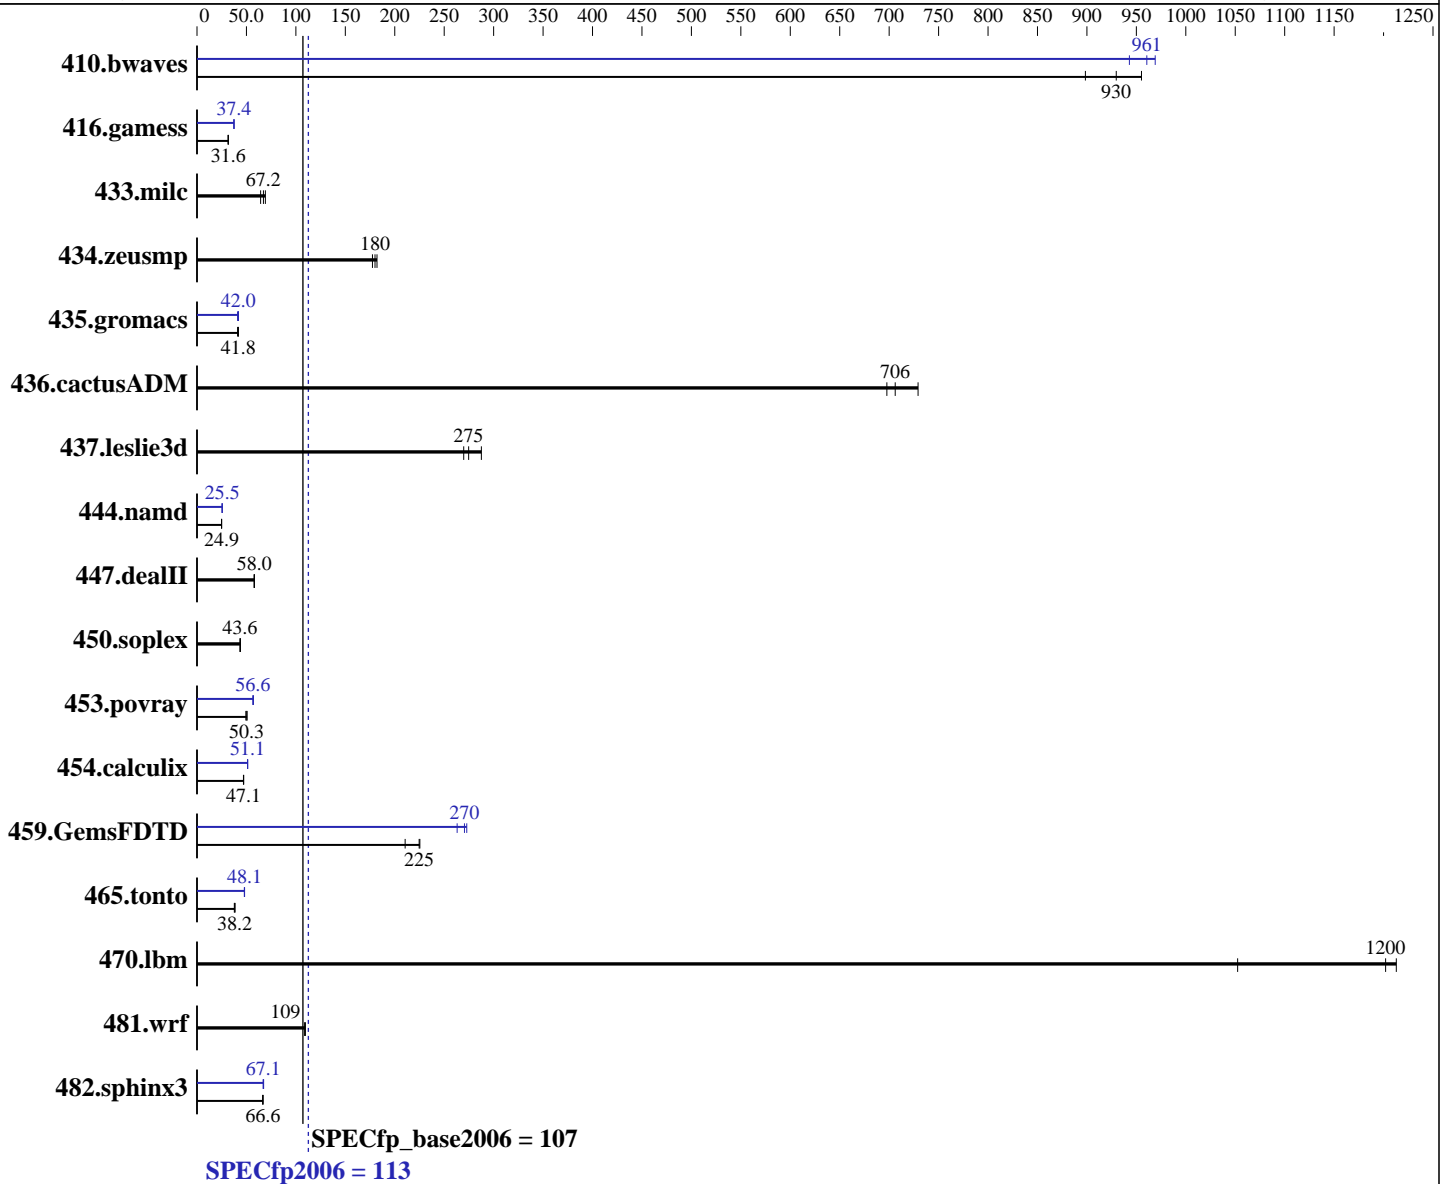

Hardware

CPU Name: Intel Xeon E5-4650 v4
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz
 CPU MHz: 2200
 FPU: Integrated
 CPU(s) enabled: 56 cores, 4 chips, 14 cores/chip
 CPU(s) orderable: 2,4 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 12 (x86_64) SP1, Kernel 3.12.49-11-default
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: xfs
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen9

(2.20 GHz, Intel Xeon E5-4650 v4)

SPECfp2006 =

113

SPECfp_base2006 =

107

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Aug-2016

Hardware Availability: Jul-2016

Software Availability: Dec-2015

L3 Cache: 35 MB I+D on chip per chip
Other Cache: None
Memory: 512 GB (32 x 16 GB 2Rx4 PC4-2400T-R)
Disk Subsystem: 1 x 400 GB SAS SSD, RAID 0
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	14.2	955	14.6	930	15.1	898	14.0	969	14.4	943	14.1	961
416.gamess	620	31.6	620	31.6	620	31.6	523	37.4	524	37.4	523	37.4
433.milc	133	69.1	137	67.2	143	64.3	133	69.1	137	67.2	143	64.3
434.zeusmp	51.3	177	50.5	180	50.0	182	51.3	177	50.5	180	50.0	182
435.gromacs	171	41.8	171	41.8	174	41.0	170	42.0	174	41.0	170	42.0
436.cactusADM	17.1	698	16.4	729	16.9	706	17.1	698	16.4	729	16.9	706
437.leslie3d	34.2	275	34.8	270	32.7	288	34.2	275	34.8	270	32.7	288
444.namd	323	24.9	322	24.9	323	24.8	315	25.5	315	25.5	315	25.5
447.dealII	198	57.8	197	58.1	197	58.0	198	57.8	197	58.1	197	58.0
450.soplex	190	43.9	191	43.6	192	43.5	190	43.9	191	43.6	192	43.5
453.povray	105	50.6	108	49.4	106	50.3	93.9	56.6	93.2	57.1	94.0	56.6
454.calculix	175	47.2	176	47.0	175	47.1	161	51.1	161	51.1	161	51.3
459.GemsFDTD	47.1	225	47.2	225	50.4	211	39.2	270	38.9	273	40.3	263
465.tonto	257	38.2	256	38.4	261	37.7	206	47.9	205	48.1	205	48.1
470.lbm	13.1	1050	11.4	1200	11.3	1210	13.1	1050	11.4	1200	11.3	1210
481.wrf	103	109	102	110	102	109	103	109	102	110	102	109
482.sphinx3	293	66.6	292	66.9	293	66.4	291	66.9	289	67.4	290	67.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled

Platform Notes

BIOS Configuration:
HP Power Profile set to Custom
HP Power Regulator to HP Static High Performance Mode
Minimum Processor Idle Power Core C-State set to C1E State
Minimum Processor Idle Power Package C-State set to No Package State
QPI Snoop Configuration set to Home Snoop
Collaborative Power Control set to Disabled
Thermal Configuration set to Maximum Cooling

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen9
(2.20 GHz, Intel Xeon E5-4650 v4)

SPECfp2006 = 113

SPECfp_base2006 = 107

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Aug-2016

Hardware Availability: Jul-2016

Software Availability: Dec-2015

Platform Notes (Continued)

Processor Power and Utilization Monitoring set to Disabled
Memory Refresh Rate set to 1x Refresh
Intel Hyper Threading set to Disabled

Sysinfo program /home/custom/cpu2006/config/sysinfo.rev6914
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1
running on sles12biswadl560 Fri Aug 19 23:49:22 2016

This section contains SUT (System Under Test) info as seen by
some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) CPU E5-4650 v4 @ 2.20GHz
 4 "physical id"s (chips)
 56 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 14
  siblings  : 14
 physical 0: cores 0 2 4 5 6 8 9 10 11 12 13 14
 physical 1: cores 0 2 4 5 6 8 9 10 11 12 13 14
 physical 2: cores 0 2 4 5 6 8 9 10 11 12 13 14
 physical 3: cores 0 2 4 5 6 8 9 10 11 12 13 14
cache size : 35840 KB
```

From /proc/meminfo

```
MemTotal:      529310044 kB
HugePages_Total:      0
Hugepagesize:      2048 kB
```

From /etc/*release* /etc/*version*

```
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 1
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP1"
VERSION_ID="12.1"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp1"
```

uname -a:

```
Linux sles12biswadl560 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen9
(2.20 GHz, Intel Xeon E5-4650 v4)

SPECfp2006 = 113

SPECfp_base2006 = 107

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Aug-2016

Hardware Availability: Jul-2016

Software Availability: Dec-2015

Platform Notes (Continued)

run-level 3 Aug 19 23:48

SPEC is set to: /home/custom/cpu2006

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	xfs	331G	249G	82G	76%	/home

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HP P85 07/01/2016

Memory:

16x UNKNOWN NOT AVAILABLE

32x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2400 MHz

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 512 GB and the dmidecode description should have one line reading as: 32x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2400 MHz

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

OMP_NUM_THREADS = "56"

LD_LIBRARY_PATH = "/home/custom/cpu2006/libs/32:/home/custom/cpu2006/libs/64:/home/custom/cpu2006/sh"

Binaries compiled on a system with 1x Intel Xeon E5-2260 v4 CPU + 128GB memory using RedHat EL 7.2

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen9

(2.20 GHz, Intel Xeon E5-4650 v4)

SPECfp2006 =

113

SPECfp_base2006 =

107

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Aug-2016

Hardware Availability: Jul-2016

Software Availability: Dec-2015

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias -qopt-prefetch-issue-excl-hint -auto-ilp32

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias
-qopt-calloc

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-qopt-prefetch-issue-excl-hint

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias -qopt-prefetch-issue-excl-hint -auto-ilp32

```

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 5



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen9

(2.20 GHz, Intel Xeon E5-4650 v4)

SPECfp2006 =

113

SPECfp_base2006 =

107

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Aug-2016

Hardware Availability: Jul-2016

Software Availability: Dec-2015

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -static -parallel
-opt-prefetch -ansi-alias
-fp-model -nofor-main
-qopt-prefetch-issue-excl-hint -funroll-all-loops

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: -xCORE-AVX2 -ipo -O3 -no-prec-div -static -parallel
-opt-prefetch
-fp-model
-qopt-prefetch-issue-excl-hint -funroll-all-loops

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen9

(2.20 GHz, Intel Xeon E5-4650 v4)

SPECfp2006 =

113

SPECfp_base2006 =

107

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Aug-2016

Hardware Availability: Jul-2016

Software Availability: Dec-2015

Peak Optimization Flags (Continued)

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2 -ipo -O3 -no-prec-div -static -parallel
-opt-prefetch -ansi-alias -fp-model -nofor-main
-qopt-prefetch-issue-excl-hint -funroll-all-loops
-auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/HP-Compiler-Flags-Intel-V1.2-HSW-revF.html>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/HP-Compiler-Flags-Intel-V1.2-HSW-revF.xml>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Sep 6 16:57:06 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 6 September 2016.

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 7