



SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 220 X6 (Intel Xeon E5-2650 v4, 2.20 GHz)

SPECfp®2006 = 111

SPECfp_base2006 = 106

CPU2006 license: 9008


Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Sep-2016

Hardware Availability: Mar-2016

Software Availability: Mar-2016

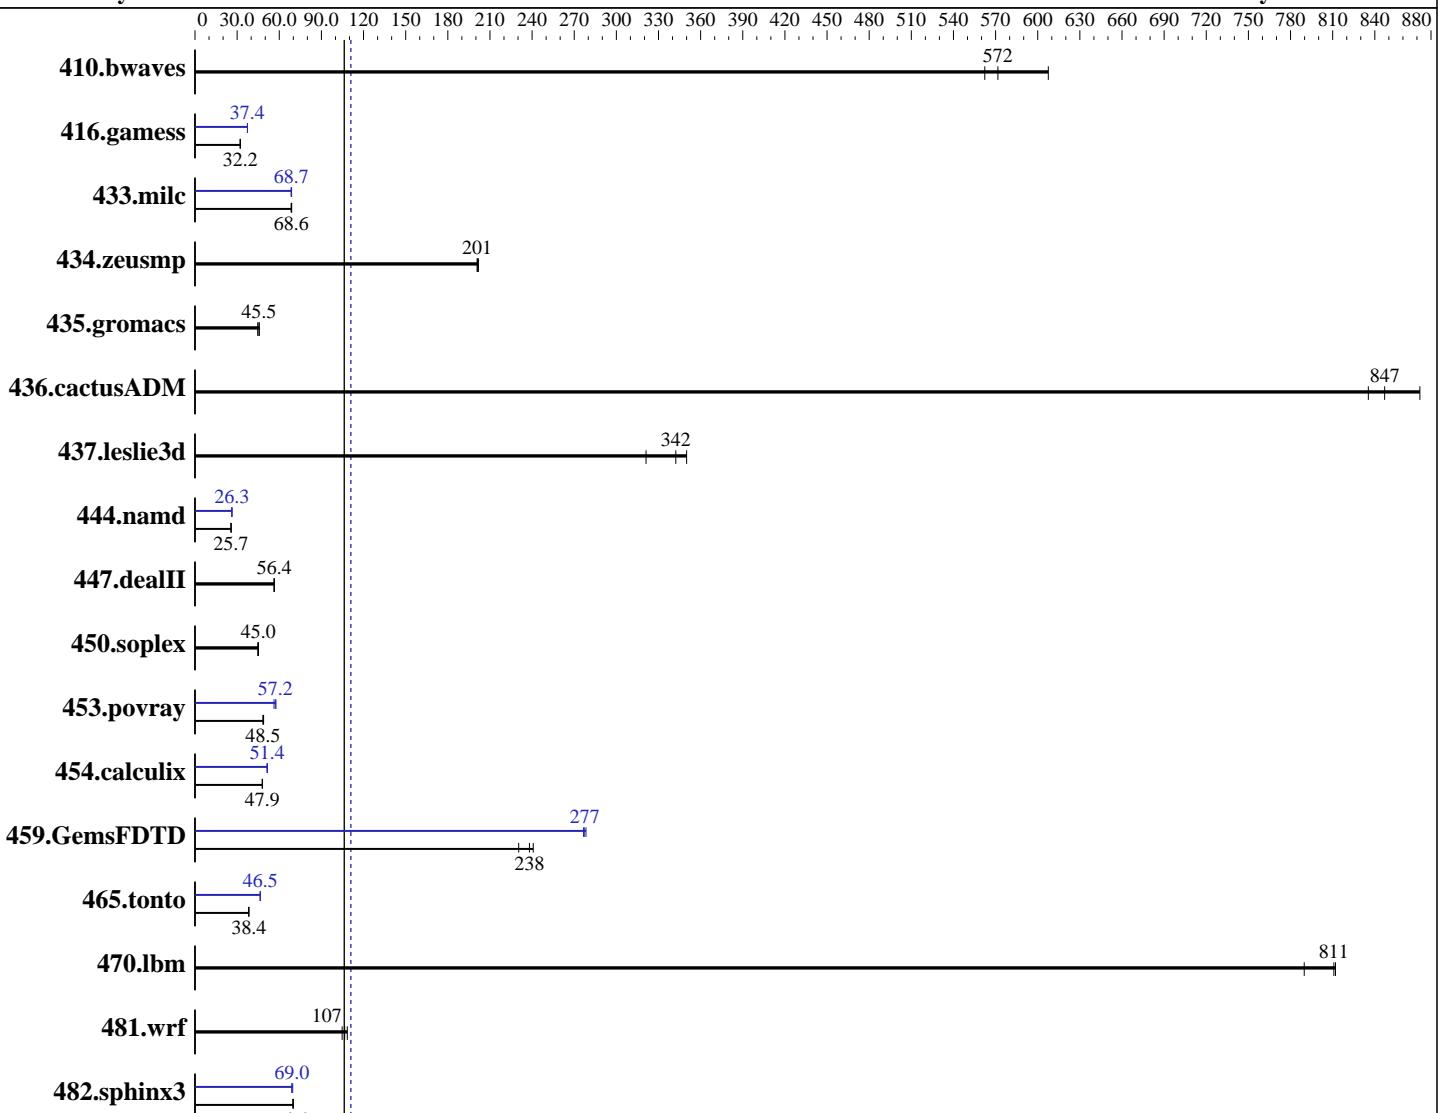

Hardware

CPU Name: Intel Xeon E5-2650 v4
 CPU Characteristics: Intel Turbo Boost Technology up to 2.90 GHz
 CPU MHz: 2200
 FPU: Integrated
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: Red Hat Enterprise Linux Server release 7.2 (Maipo)
 Compiler: 3.10.0-327.18.2.el7.x86_64
 C/C++: Version 16.0.3.210 of Intel C++ Studio XE for Linux;
 Fortran: Version 16.0.3.210 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 220 X6 (Intel Xeon E5-2650 v4, 2.20 GHz)

SPECfp2006 = 111

SPECfp_base2006 = 106

CPU2006 license: 9008

Test date: Sep-2016

Test sponsor: ACTION S.A.

Hardware Availability: Mar-2016

Tested by: ACTION S.A.

Software Availability: Mar-2016

L3 Cache: 30 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2400T-R)
 Disk Subsystem: 1 x 240 GB SATA II SSD
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	23.8	572	24.2	562	22.4	608	23.8	572	24.2	562	22.4	608
416.gamess	607	32.2	608	32.2	607	32.3	524	37.4	525	37.3	524	37.4
433.milc	133	68.8	134	68.5	134	68.6	134	68.7	134	68.4	133	68.8
434.zeusmp	45.3	201	45.1	202	45.3	201	45.3	201	45.1	202	45.3	201
435.gromacs	156	45.8	157	45.5	160	44.6	156	45.8	157	45.5	160	44.6
436.cactusADM	14.1	847	13.7	872	14.3	835	14.1	847	13.7	872	14.3	835
437.leslie3d	27.5	342	29.3	321	26.9	350	27.5	342	29.3	321	26.9	350
444.namd	312	25.7	313	25.7	312	25.7	305	26.3	306	26.2	305	26.3
447.dealII	203	56.4	203	56.3	203	56.4	203	56.4	203	56.3	203	56.4
450.soplex	186	44.7	185	45.0	185	45.1	186	44.7	185	45.0	185	45.1
453.povray	109	48.8	110	48.5	110	48.5	94.6	56.2	93.1	57.2	92.3	57.7
454.calculix	172	47.9	172	47.9	172	48.1	160	51.5	161	51.4	161	51.4
459.GemsFDTD	44.6	238	46.0	230	44.1	241	38.4	277	38.1	278	38.2	277
465.tonto	257	38.4	258	38.2	257	38.4	212	46.5	212	46.5	212	46.5
470.lbm	16.9	811	17.4	790	16.9	812	16.9	811	17.4	790	16.9	812
481.wrf	103	108	107	105	105	107	103	108	107	105	105	107
482.sphinx3	279	69.9	278	70.0	280	69.6	280	69.6	283	68.9	282	69.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Bios Settings:
 Intel(R) Hyper-Threading Tech = Disabled
 Power & Performance = Performance
 Enforce POR = Disabled
 Memory Operating Speed Selection = 2400
 Cluster-on-Die = Disabled
 Set FAN Profile = Performance
 Fan PWM Offset = 0

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ACTION S.A.	SPECfp2006 =	111
ACTINA SOLAR 220 X6 (Intel Xeon E5-2650 v4, 2.20 GHz)	SPECfp_base2006 =	106
CPU2006 license: 9008	Test date:	Sep-2016
Test sponsor: ACTION S.A.	Hardware Availability:	Mar-2016
Tested by: ACTION S.A.	Software Availability:	Mar-2016

Platform Notes (Continued)

```
Sysinfo program /cpu2006.1.2/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$
running on SUT Mon Sep 19 21:45:38 2016
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2650 v4 @ 2.20GHz
 2 "physical id"s (chips)
 24 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 12
  siblings : 12
  physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
  physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
  cache size : 30720 KB
```

```
From /proc/meminfo
MemTotal:      263856648 kB
HugePages_Total:       1
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux Server"
  VERSION="7.2 (Maipo)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="7.2"
  PRETTY_NAME="Red Hat Enterprise Linux"
  ANSI_COLOR="0;31"
  CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
os-release.rpmsave:
  NAME="Red Hat Enterprise Linux Server"
  VERSION="7.0 (Maipo)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="7.0"
  PRETTY_NAME="Red Hat Enterprise Linux"
  ANSI_COLOR="0;31"
  CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server
```

```
uname -a:
Linux SUT 3.10.0-327.18.2.el7.x86_64 #2 SMP Wed Jun 1 17:37:13 CEST 2016
x86_64 x86_64 x86_64 GNU/Linux
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ACTION S.A.	SPECfp2006 =	111
ACTINA SOLAR 220 X6 (Intel Xeon E5-2650 v4, 2.20 GHz)	SPECfp_base2006 =	106
CPU2006 license: 9008	Test date:	Sep-2016
Test sponsor: ACTION S.A.	Hardware Availability:	Mar-2016
Tested by: ACTION S.A.	Software Availability:	Mar-2016

Platform Notes (Continued)

run-level 3 Sep 19 16:06

```
SPEC is set to: /cpu2006.1.2
Filesystem      Type  Size  Used  Avail Use% Mounted on
/dev/sdal       ext4  212G  120G   82G  60%  /
```

Additional information from dmidecode:

```
BIOS Intel Corporation SE5C610.86B.11.01.0136.062220161656 06/22/2016
Memory:
 16x 16 GB
 16x Hynix HMA42GR7AFR4N-UH 16 GB 2400 MHz 2 rank
 8x NO DIMM NO DIMM
```

(End of data from sysinfo program)

dmidecode does not properly detect memory modules
16 modules of 16 GB were used to run the test (256 GB total)

General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/cpu2006.1.2/lib/32:/cpu2006.1.2/lib/64:/cpu2006.1.2/sh"
OMP_NUM_THREADS = "24"
```

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enable
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
Binaries compiled on a system with 2x Xeon E5-2650 v4 chips + 256 GB memory
using RedHat EL 7.2
```

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ACTION S.A. ACTINA SOLAR 220 X6 (Intel Xeon E5-2650 v4, 2.20 GHz)	SPECfp2006 = 111 SPECfp_base2006 = 106
CPU2006 license: 9008	Test date: Sep-2016
Test sponsor: ACTION S.A.	Hardware Availability: Mar-2016
Tested by: ACTION S.A.	Software Availability: Mar-2016

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
    453.povray: -DSPEC_CPU_LP64
    454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ACTION S.A.	SPECfp2006 =	111
ACTINA SOLAR 220 X6 (Intel Xeon E5-2650 v4, 2.20 GHz)	SPECfp_base2006 =	106
CPU2006 license: 9008	Test date:	Sep-2016
Test sponsor: ACTION S.A.	Hardware Availability:	Mar-2016
Tested by: ACTION S.A.	Software Availability:	Mar-2016

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32 -ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll12 -ansi-alias
-parallel

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll14
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll12
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 220 X6 (Intel Xeon E5-2650 v4, 2.20 GHz)

SPECfp2006 =

111

SPECfp_base2006 =

106

CPU2006 license: 9008

Test date: Sep-2016

Test sponsor: ACTION S.A.

Hardware Availability: Mar-2016

Tested by: ACTION S.A.

Software Availability: Mar-2016

Peak Optimization Flags (Continued)

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll12
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-inline-calloc -opt-malloc-options=3 -auto -unroll14

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>
<http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevB-aug-2015-For-Intel-Platform.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>
<http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevB-aug-2015-For-Intel-Platform.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Nov 15 16:05:36 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 November 2016.