SPEC® CFP2006 Result

Huawei

Huawei XH628 V3 (Intel Xeon E5-2667 v4)

SPECfp®2006 = 121

SPECfp_base2006 = 117

CPU2006 license:	3175	**Test date:**	Nov-2016
Test sponsor:	Huawei	**Hardware Availability:**	Mar-2016
Tested by:	Huawei	**Software Availability:**	Dec-2015

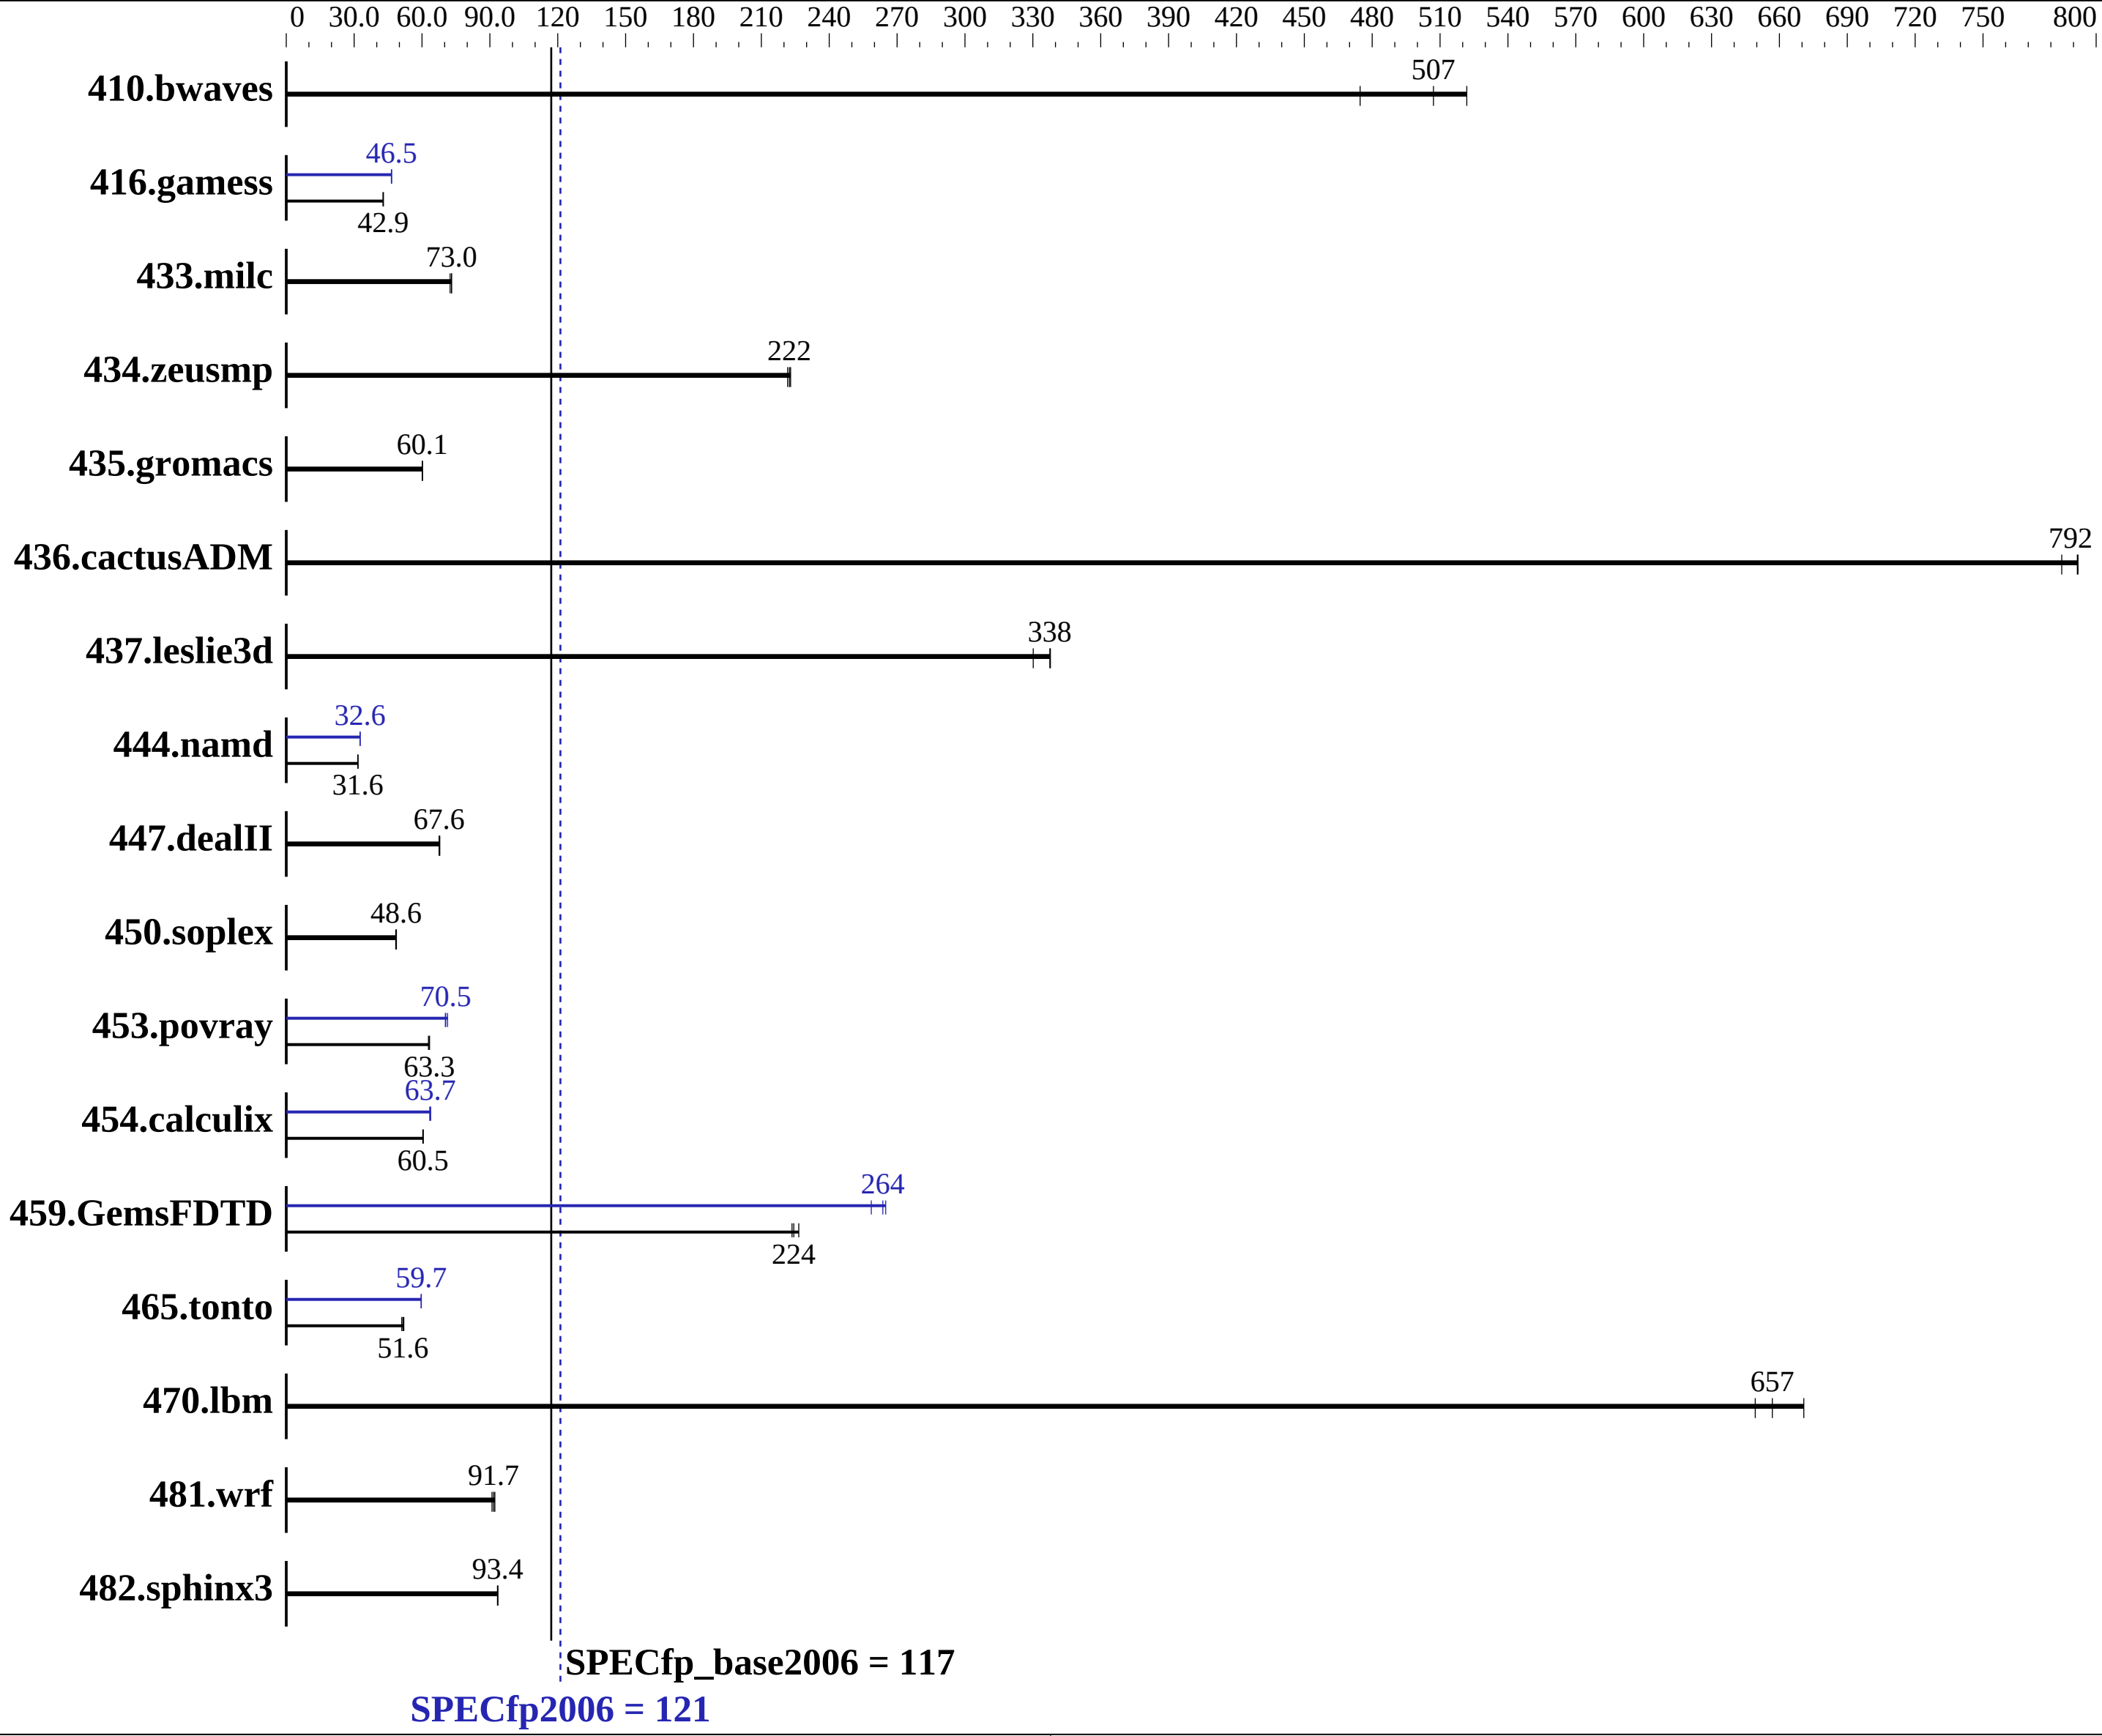

Hardware

CPU Name:	Intel Xeon E5-2667 v4
CPU Characteristics:	Intel Turbo Boost Technology up to 3.60 GHz
CPU MHz:	3200
FPU:	Integrated
CPU(s) enabled:	16 cores, 2 chips, 8 cores/chip
CPU(s) orderable:	1,2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 12 SP1 3.12.49-11-default
Compiler:	C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux; Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
Auto Parallel:	Yes
File System:	xfs
System State:	Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Huawei

Huawei XH628 V3 (Intel Xeon E5-2667 v4)

SPECfp2006 = 121

SPECfp_base2006 = 117

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei
Test date: Nov-2016
Hardware Availability: Mar-2016
Software Availability: Dec-2015

L3 Cache:	25 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (16 x 16 GB 2Rx8 PC4-2400T-R)
Disk Subsystem:	1 x 800 GB SATA SSD
Other Hardware:	None

Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other Software:	None

Results Table

	Base						Peak					
Benchmark	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	**26.8**	**507**	26.0	522	28.6	475	**26.8**	**507**	26.0	522	28.6	475
416.gamess	456	42.9	**456**	**42.9**	458	42.8	**421**	**46.5**	421	46.5	421	46.5
433.milc	126	73.0	127	72.4	**126**	**73.0**	126	73.0	127	72.4	**126**	**73.0**
434.zeusmp	40.8	223	41.1	222	**40.9**	**222**	40.8	223	41.1	222	**40.9**	**222**
435.gromacs	**119**	**60.1**	119	60.2	119	60.1	**119**	**60.1**	119	60.2	119	60.1
436.cactusADM	**15.1**	**792**	15.1	792	15.2	785	**15.1**	**792**	15.1	792	15.2	785
437.leslie3d	27.8	338	**27.9**	**338**	28.5	330	27.8	338	**27.9**	**338**	28.5	330
444.namd	253	31.7	**253**	**31.6**	253	31.6	246	32.6	246	32.6	**246**	**32.6**
447.dealII	**169**	**67.6**	169	67.6	169	67.9	**169**	**67.6**	169	67.6	169	67.9
450.soplex	172	48.4	**171**	**48.6**	171	48.7	172	48.4	**171**	**48.6**	171	48.7
453.povray	84.7	62.8	**84.1**	**63.3**	84.0	63.3	75.7	70.3	74.6	71.3	**75.5**	**70.5**
454.calculix	**136**	**60.5**	137	60.4	136	60.5	**130**	**63.7**	129	63.8	130	63.4
459.GemsFDTD	**47.3**	**224**	47.5	224	46.8	227	40.0	265	**40.2**	**264**	41.0	259
465.tonto	**191**	**51.6**	189	52.0	193	51.0	165	59.7	**165**	**59.7**	165	59.7
470.lbm	**20.9**	**657**	21.2	649	20.5	671	**20.9**	**657**	21.2	649	20.5	671
481.wrf	**122**	**91.7**	123	90.9	121	92.2	**122**	**91.7**	123	90.9	121	92.2
482.sphinx3	**209**	**93.4**	208	93.5	209	93.3	**209**	**93.4**	208	93.5	209	93.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS configuration:
Set Power Efficiency Mode to Custom
Set Snoop Mode to HS mode
Set Patrol Scrub to Disable
Set Hyper-Threading to Disable
Sysinfo program /spec/spec16/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on linux-c3qu Sat Nov 26 05:14:21 2016

This section contains SUT (System Under Test) info as seen by
```

Continued on next page

Platform Notes (Continued)

```
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2667 v4@ 3.20GHz
      2 "physical id"s (chips)
      16 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 8
      siblings  : 8
      physical 0: cores 0 2 3 4 8 10 11 12
      physical 1: cores 0 2 3 4 8 10 11 12
   cache size : 25600 KB

From /proc/meminfo
   MemTotal:       264062240 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
   SUSE Linux Enterprise Server 12 SP1

From /etc/*release* /etc/*version*
   SuSE-release:
      SUSE Linux Enterprise Server 12 (x86_64)
      VERSION = 12
      PATCHLEVEL = 1
      # This file is deprecated and will be removed in a future service pack or
      release.
      # Please check /etc/os-release for details about this release.
   os-release:
      NAME="SLES"
      VERSION="12-SP1"
      VERSION_ID="12.1"
      PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
      ID="sles"
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:12:sp1"

uname -a:
   Linux linux-c3qu 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
   (8d714a0) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Nov 26 00:59

SPEC is set to: /spec/spec16
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda3      xfs   641G  7.6G  634G   2% /spec
Additional information from dmidecode:
```

Continued on next page

Platform Notes (Continued)

```
    Warning: Use caution when you interpret this section. The 'dmidecode' program
    reads system data which is "intended to allow hardware to be accurately
    determined", but the intent may not be met, as there are frequent changes to
    hardware, firmware, and the "DMTF SMBIOS" standard.

   BIOS Insyde Corp. 3.31 08/22/2016
   Memory:
    16x Samsung M393A2K43BB1-CRC 16 GB 2 rank 2400 MHz

 (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/spec/spec16/libs/32:/spec/spec16/libs/64:/spec/spec16/sh"
OMP_NUM_THREADS = "16"

 Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB
 memory using RedHat EL 7.1
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
 The Huawei XH622 V3 and Huawei XH628 V3 and Huawei XH620 V3
 are electronically equivalent.
 The results have been measured on a Huawei XH620 V3 model
```

Base Compiler Invocation

C benchmarks:
    icc   -m64

C++ benchmarks:
    icpc -m64

Fortran benchmarks:
    ifort -m64

Benchmarks using both Fortran and C:
    icc   -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64

Continued on next page

Base Portability Flags (Continued)

433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2 -inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -inline-calloc

Continued on next page

Huawei

Huawei XH628 V3 (Intel Xeon E5-2667 v4)

SPECfp2006 = 121

SPECfp_base2006 = 117

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Nov-2016
Hardware Availability: Mar-2016
Software Availability: Dec-2015

Peak Optimization Flags (Continued)

465.tonto (continued):
`-opt-malloc-options=3 -auto -unroll4`

Benchmarks using both Fortran and C:

435.gromacs: `basepeak = yes`

436.cactusADM: `basepeak = yes`

454.calculix: `-xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias`

481.wrf: `basepeak = yes`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html
http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-BDW-V1.0.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml
http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-BDW-V1.0.xml

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Dec 15 11:17:35 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 13 December 2016.