



SPEC[®] CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo ThinkServer SD350
(2.60 GHz, Intel Xeon E5-2623 v4)

SPECfp[®]2006 = **98.4**

SPECfp_base2006 = **95.1**

CPU2006 license: 9017


Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Jan-2017

Hardware Availability: Sep-2016

Software Availability: Sep-2016

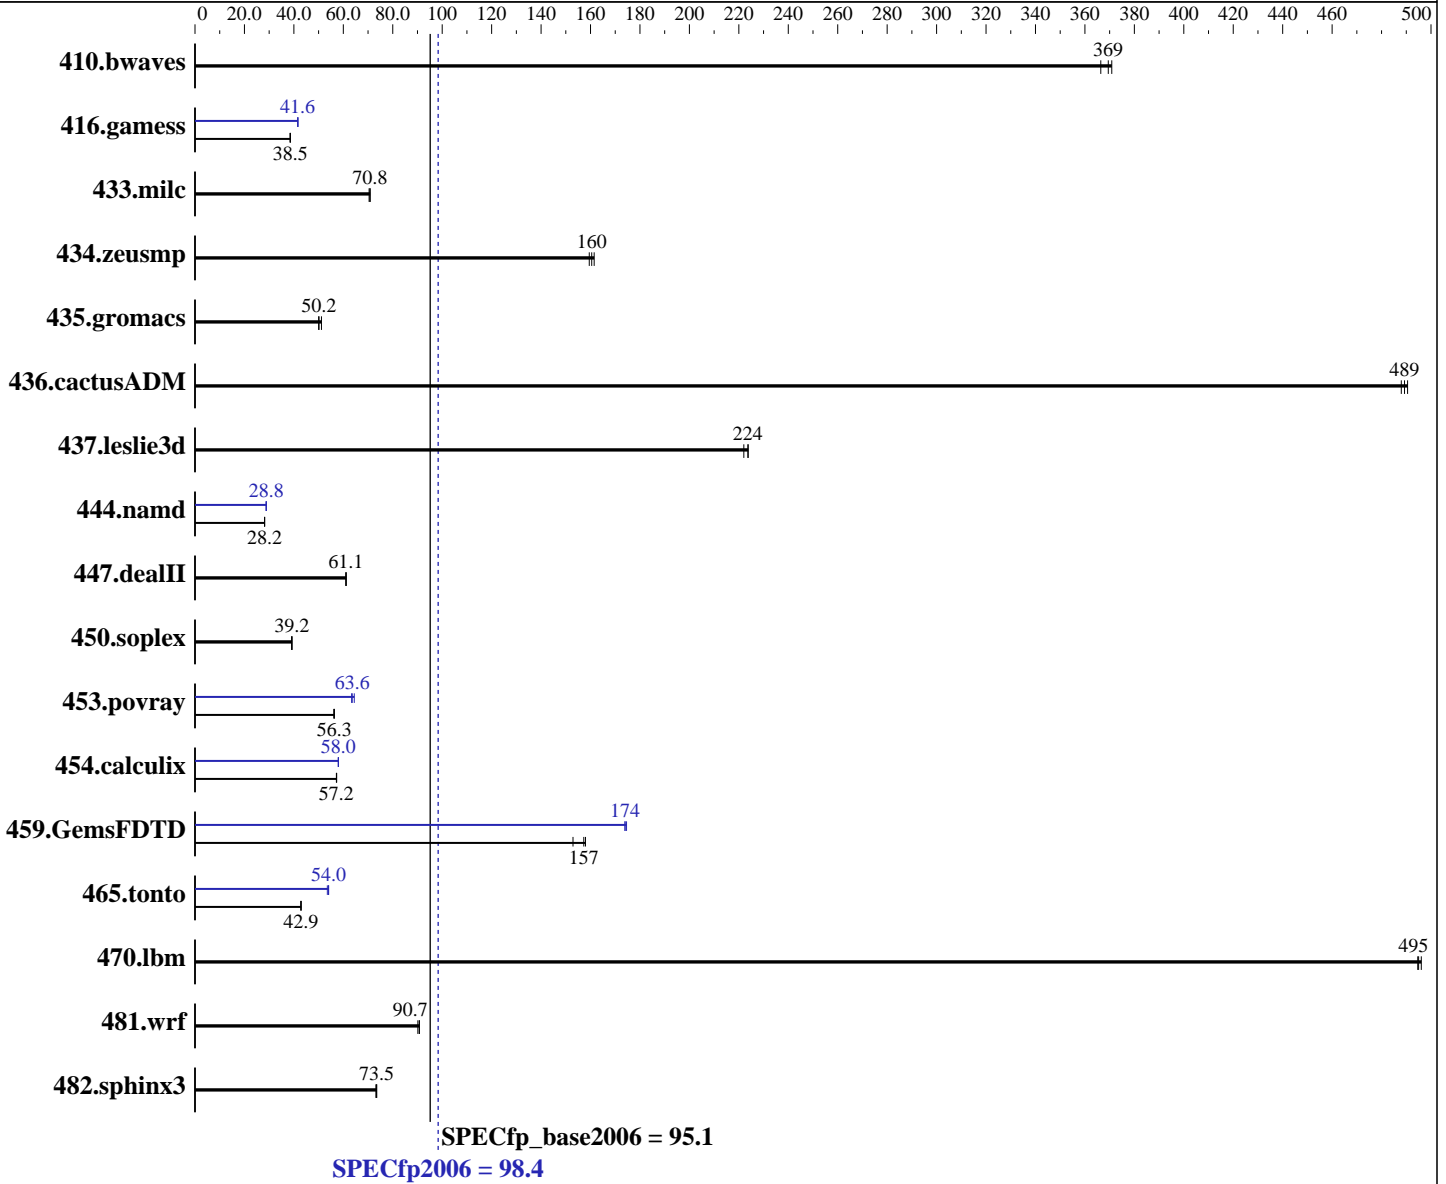

Hardware

CPU Name: Intel Xeon E5-2623 v4
 CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz
 CPU MHz: 2600
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 12 SP1 (x86_64)
 Kernel 3.12.49-11-default
 Compiler: C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux;
 Fortran: Version 17.0.0.098 of Intel Fortran Compiler for Linux
 Auto Parallel: Yes
 File System: xfs
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = **98.4**

Lenovo ThinkServer SD350
(2.60 GHz, Intel Xeon E5-2623 v4)

SPECfp_base2006 = **95.1**

CPU2006 license: 9017

Test date: Jan-2017

Test sponsor: Lenovo Group Limited

Hardware Availability: Sep-2016

Tested by: Lenovo Group Limited

Software Availability: Sep-2016

L3 Cache: 10 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2400T-R, running at 2133 MHz)
Disk Subsystem: 1 x 800 GB SATA SSD
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	37.1	366	36.8	369	36.6	371	37.1	366	36.8	369	36.6	371
416.gamess	508	38.5	507	38.6	509	38.5	471	41.6	471	41.6	471	41.6
433.milc	130	70.4	130	70.9	130	70.8	130	70.4	130	70.9	130	70.8
434.zeusmp	57.1	159	56.7	160	56.4	161	57.1	159	56.7	160	56.4	161
435.gromacs	140	51.2	142	50.2	143	50.0	140	51.2	142	50.2	143	50.0
436.cactusADM	24.4	489	24.4	491	24.5	488	24.4	489	24.4	491	24.5	488
437.leslie3d	42.0	224	42.0	224	42.3	222	42.0	224	42.0	224	42.3	222
444.namd	285	28.1	285	28.2	285	28.2	278	28.8	278	28.8	278	28.8
447.dealII	187	61.2	187	61.0	187	61.1	187	61.2	187	61.0	187	61.1
450.soplex	213	39.2	213	39.1	212	39.3	213	39.2	213	39.1	212	39.3
453.povray	94.4	56.4	94.5	56.3	94.7	56.2	82.6	64.4	83.6	63.6	84.0	63.4
454.calculix	144	57.2	144	57.2	144	57.3	142	58.0	142	58.0	142	58.0
459.GemsFDTD	67.5	157	69.4	153	67.2	158	61.0	174	60.8	175	61.0	174
465.tonto	230	42.9	229	43.0	230	42.8	182	54.0	182	54.1	184	53.5
470.lbm	27.8	495	27.8	495	27.7	496	27.8	495	27.8	495	27.7	496
481.wrf	124	90.1	123	90.8	123	90.7	124	90.1	123	90.8	123	90.7
482.sphinx3	265	73.5	266	73.2	265	73.5	265	73.5	266	73.2	265	73.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages disabled with:
echo never > /sys/kernel/mm/transparent_hugepage/enabled

Platform Notes

BIOS configuration:
Hyper-Threading set to Disabled
Sysinfo program /home/cpu2006-1.2-ic17.0/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on Kent-SUT4 Sat Jan 16 00:53:08 2016

This section contains SUT (System Under Test) info as seen by

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = 98.4

Lenovo ThinkServer SD350
(2.60 GHz, Intel Xeon E5-2623 v4)

SPECfp_base2006 = 95.1

CPU2006 license: 9017

Test date: Jan-2017

Test sponsor: Lenovo Group Limited

Hardware Availability: Sep-2016

Tested by: Lenovo Group Limited

Software Availability: Sep-2016

Platform Notes (Continued)

some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
  model name : Intel(R) Xeon(R) CPU E5-2623 v4@ 2.60GHz
  2 "physical id"s (chips)
  8 "processors"
  cores, siblings (Caution: counting these is hw and system dependent. The
  following excerpts from /proc/cpuinfo might not be reliable. Use with
  caution.)
    cpu cores : 4
    siblings  : 4
    physical 0: cores 0 1 2 3
    physical 1: cores 0 1 2 3
  cache size : 10240 KB

```

```

From /proc/meminfo
MemTotal:      264573176 kB
HugePages_Total:    0
Hugepagesize:   2048 kB

```

```

From /etc/*release* /etc/*version*
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 1
  # This file is deprecated and will be removed in a future service pack or
  # release.
  # Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12-SP1"
  VERSION_ID="12.1"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp1"

```

```

uname -a:
Linux Kent-SUT4 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Jan 15 19:28

```

SPEC is set to: /home/cpu2006-1.2-ic17.0
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdc5       xfs   703G  4.6G  698G   1% /home

```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = 98.4

Lenovo ThinkServer SD350
(2.60 GHz, Intel Xeon E5-2623 v4)

SPECfp_base2006 = 95.1

CPU2006 license: 9017

Test date: Jan-2017

Test sponsor: Lenovo Group Limited

Hardware Availability: Sep-2016

Tested by: Lenovo Group Limited

Software Availability: Sep-2016

Platform Notes (Continued)

hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 3.57 08/12/2016

Memory:

16x Samsung M393A2G40DB1-CRC 16 GB 2 rank 2400 MHz, configured at 2133 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH = "/home/cpu2006-1.2-ic17.0/libs/32:/home/cpu2006-1.2-ic17.0/libs/64:/home/cpu2006-1.2-ic17.0/sh10.2"

OMP_NUM_THREADS = "8"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.2

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = 98.4

Lenovo ThinkServer SD350
(2.60 GHz, Intel Xeon E5-2623 v4)

SPECfp_base2006 = 95.1

CPU2006 license: 9017

Test date: Jan-2017

Test sponsor: Lenovo Group Limited

Hardware Availability: Sep-2016

Tested by: Lenovo Group Limited

Software Availability: Sep-2016

Base Portability Flags (Continued)

459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = 98.4

Lenovo ThinkServer SD350
(2.60 GHz, Intel Xeon E5-2623 v4)

SPECfp_base2006 = 95.1

CPU2006 license: 9017

Test date: Jan-2017

Test sponsor: Lenovo Group Limited

Hardware Availability: Sep-2016

Tested by: Lenovo Group Limited

Software Availability: Sep-2016

Peak Optimization Flags (Continued)

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -fno-alias -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll2 -inline-level=0
-qopt-prefetch -parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -inline-calloc -qopt-malloc-options=3
-auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = 98.4

Lenovo ThinkServer SD350
(2.60 GHz, Intel Xeon E5-2623 v4)

SPECfp_base2006 = 95.1

CPU2006 license: 9017

Test date: Jan-2017

Test sponsor: Lenovo Group Limited

Hardware Availability: Sep-2016

Tested by: Lenovo Group Limited

Software Availability: Sep-2016

Peak Optimization Flags (Continued)

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-BDW-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-BDW-revE.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Feb 7 17:00:10 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 7 February 2017.