



SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML30 Gen9

(3.90 GHz, Intel Xeon E3-1280 v6)

SPECfp®2006 =

108

SPECfp_base2006 =

106

CPU2006 license: 3


Test sponsor: HPE

Tested by: HPE

Test date: Feb-2017

Hardware Availability: May-2017

Software Availability: Nov-2016

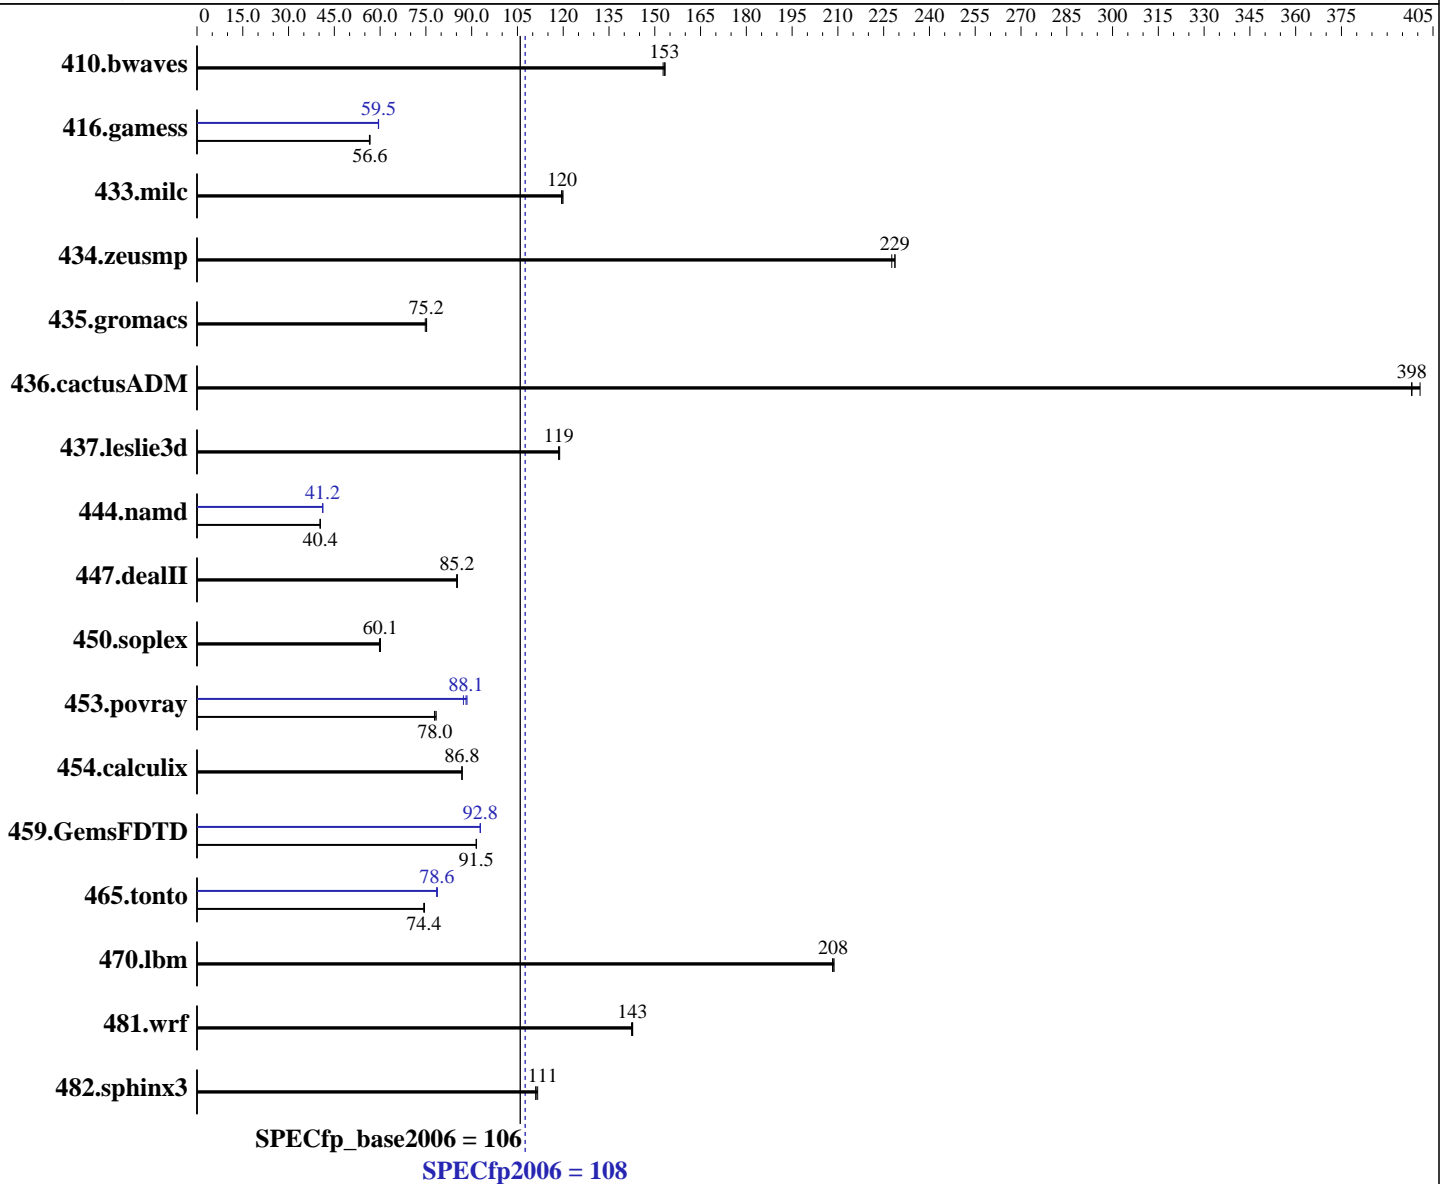

Hardware

CPU Name: Intel Xeon E3-1280 v6
 CPU Characteristics: Intel Turbo Boost Technology up to 4.20 GHz
 CPU MHz: 3900
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 12 (x86_64) SP2
 Kernel 4.4.21-69-default
 Compiler: C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux;
 Fortran: Version 17.0.0.098 of Intel Fortran Compiler for Linux
 Auto Parallel: Yes
 File System: xfs
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML30 Gen9

(3.90 GHz, Intel Xeon E3-1280 v6)

SPECfp2006 = 108

SPECfp_base2006 = 106

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Feb-2017

Hardware Availability: May-2017

Software Availability: Nov-2016

L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2400T-E)
Disk Subsystem: 1 x 1 TB SATA 7.2 K RPM, RAID 0
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	<u>88.7</u>	<u>153</u>	88.6	153	89.0	153	<u>88.7</u>	<u>153</u>	88.6	153	89.0	153
416.gamess	346	56.6	347	56.5	<u>346</u>	<u>56.6</u>	<u>329</u>	<u>59.5</u>	329	59.4	329	59.5
433.milc	76.9	119	76.5	120	<u>76.7</u>	<u>120</u>	76.9	119	76.5	120	<u>76.7</u>	<u>120</u>
434.zeusmp	39.8	229	40.0	228	<u>39.8</u>	<u>229</u>	39.8	229	40.0	228	<u>39.8</u>	<u>229</u>
435.gromacs	94.9	75.2	<u>95.0</u>	<u>75.2</u>	95.5	74.8	94.9	75.2	<u>95.0</u>	<u>75.2</u>	95.5	74.8
436.cactusADM	29.8	401	<u>30.0</u>	<u>398</u>	30.0	398	29.8	401	<u>30.0</u>	<u>398</u>	30.0	398
437.leslie3d	79.1	119	<u>79.3</u>	<u>119</u>	79.3	118	79.1	119	<u>79.3</u>	<u>119</u>	79.3	118
444.namd	<u>199</u>	<u>40.4</u>	199	40.3	198	40.4	<u>195</u>	<u>41.2</u>	195	41.2	195	41.2
447.dealII	134	85.3	134	85.1	<u>134</u>	<u>85.2</u>	134	85.3	134	85.1	<u>134</u>	<u>85.2</u>
450.soplex	139	60.1	<u>139</u>	<u>60.1</u>	139	59.8	139	60.1	<u>139</u>	<u>60.1</u>	139	59.8
453.povray	67.9	78.4	68.4	77.8	<u>68.2</u>	<u>78.0</u>	<u>60.4</u>	<u>88.1</u>	60.1	88.5	60.9	87.3
454.calculix	94.9	86.9	95.0	86.8	<u>95.0</u>	<u>86.8</u>	94.9	86.9	95.0	86.8	<u>95.0</u>	<u>86.8</u>
459.GemsFDTD	116	91.5	<u>116</u>	<u>91.5</u>	116	91.6	114	92.8	<u>114</u>	<u>92.8</u>	114	92.9
465.tonto	132	74.6	<u>132</u>	<u>74.4</u>	132	74.3	125	78.6	125	78.8	<u>125</u>	<u>78.6</u>
470.lbm	<u>65.9</u>	<u>208</u>	66.0	208	65.8	209	<u>65.9</u>	<u>208</u>	66.0	208	65.8	209
481.wrf	<u>78.3</u>	<u>143</u>	78.2	143	78.4	142	<u>78.3</u>	<u>143</u>	78.2	143	78.4	142
482.sphinx3	175	112	<u>175</u>	<u>111</u>	176	111	175	112	<u>175</u>	<u>111</u>	176	111

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default

Platform Notes

BIOS Configuration:

Intel HyperThreading set to Disabled
Power Profile set to Custom
Minimum Processor Idle Power Core C-State set to C3 State
Minimum Processor Idle Power Package C-State set to Package C6 (retention) State
Energy/Performance Bias set to Maximum Performance
Thermal Configuration set to Maximum Cooling
Processor Power and Utilization Monitoring set to Disabled
Memory Double Refresh Rate set to 1x Refresh

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML30 Gen9

(3.90 GHz, Intel Xeon E3-1280 v6)

SPECfp2006 =

108

SPECfp_base2006 =

106

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Feb-2017

Hardware Availability: May-2017

Software Availability: Nov-2016

Platform Notes (Continued)

Sysinfo program /home/cpu2006/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on ml30-g9-sles12-sp2 Thu Feb 23 20:05:34 2017

This section contains SUT (System Under Test) info as seen by
some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E3-1280 v6 @ 3.90GHz

1 "physical id"s (chips)

4 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)

cpu cores : 4

siblings : 4

physical 0: cores 0 1 2 3

cache size : 8192 KB

From /proc/meminfo

MemTotal: 65572320 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

/usr/bin/lsb_release -d

SUSE Linux Enterprise Server 12 SP2

From /etc/*release* /etc/*version*

SuSE-release:

SUSE Linux Enterprise Server 12 (x86_64)

VERSION = 12

PATCHLEVEL = 2

This file is deprecated and will be removed in a future service pack or
release.

Please check /etc/os-release for details about this release.

os-release:

NAME="SLES"

VERSION="12-SP2"

VERSION_ID="12.2"

PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"

ID="sles"

ANSI_COLOR="0;32"

CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:

Linux ml30-g9-sles12-sp2 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC
2016 (9464f67) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Feb 22 21:05

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 3



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML30 Gen9

(3.90 GHz, Intel Xeon E3-1280 v6)

SPECfp2006 =

108

SPECfp_base2006 =

106

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Feb-2017

Hardware Availability: May-2017

Software Availability: Nov-2016

Platform Notes (Continued)

SPEC is set to: /home/cpu2006

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	xfs	500G	5.4G	495G	2%	/home

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HP U23 01/17/2017

Memory:

4x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2400 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh10.2"

OMP_NUM_THREADS = "4"

Binaries compiled on a system with 1x Intel Core i7-4790K CPU + 32GB RAM memory using Redhat Enterprise Linux 7.2

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML30 Gen9

(3.90 GHz, Intel Xeon E3-1280 v6)

SPECfp2006 =

108

SPECfp_base2006 =

106

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Feb-2017

Hardware Availability: May-2017

Software Availability: Nov-2016

Base Portability Flags (Continued)

```

435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML30 Gen9

(3.90 GHz, Intel Xeon E3-1280 v6)

SPECfp2006 =

108

SPECfp_base2006 =

106

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Feb-2017

Hardware Availability: May-2017

Software Availability: Nov-2016

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll2 -inline-level=0
-qopt-prefetch -parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -inline-calloc -qopt-malloc-options=3
-auto -unroll4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML30 Gen9

(3.90 GHz, Intel Xeon E3-1280 v6)

SPECfp2006 =

108

SPECfp_base2006 =

106

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Feb-2017

Hardware Availability: May-2017

Software Availability: Nov-2016

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revD.html>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-HSW-revF.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revD.xml>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-HSW-revF.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue May 2 14:04:52 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 2 May 2017.