



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## NEC Corporation

SPECfp<sup>®</sup>2006 = 76.6

### Express5800/T110i (Intel Pentium G4560)

SPECfp\_base2006 = 76.0

CPU2006 license: 9006


Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Apr-2017

Hardware Availability: Apr-2017

Software Availability: Jan-2017

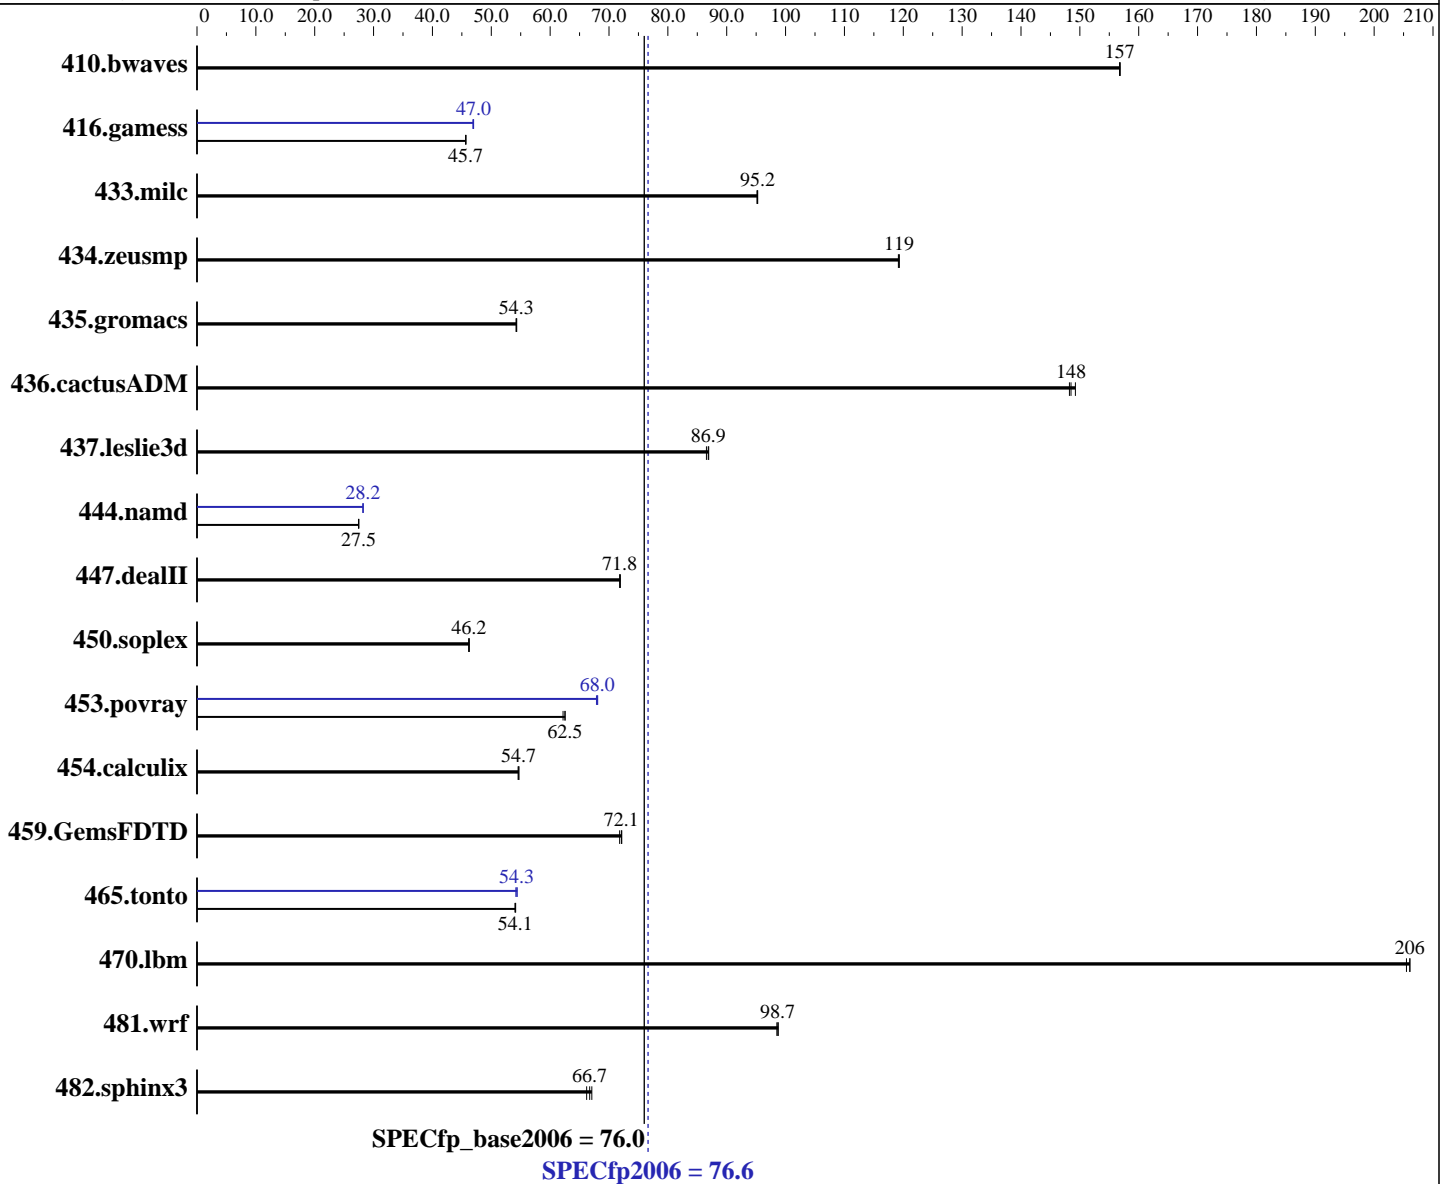

#### Hardware

CPU Name: Intel Pentium G4560  
 CPU Characteristics:  
 CPU MHz: 3500  
 FPU: Integrated  
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

#### Software

Operating System: Red Hat Enterprise Linux Server release 7.3 (Maipo)  
 Kernel 3.10.0-514.6.1.el7.x86\_64  
 Compiler: C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 17.0.0.098 of Intel Fortran Compiler for Linux  
 Auto Parallel: Yes  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## NEC Corporation

SPECfp2006 = **76.6**

## Express5800/T110i (Intel Pentium G4560)

SPECfp\_base2006 = **76.0**

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Apr-2017

Hardware Availability: Apr-2017

Software Availability: Jan-2017

L3 Cache: 3 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 32 GB (2 x 16 GB 2Rx8 PC4-2400T-E)  
 Disk Subsystem: 1 x 1 TB SATA, 7200 RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	<b><u>86.7</u></b>	<b><u>157</u></b>	86.6	157	86.7	157	<b><u>86.7</u></b>	<b><u>157</u></b>	86.6	157	86.7	157
416.gamess	<b><u>429</u></b>	<b><u>45.7</u></b>	429	45.7	429	45.7	418	46.9	417	47.0	<b><u>417</u></b>	<b><u>47.0</u></b>
433.milc	<b><u>96.4</u></b>	<b><u>95.2</u></b>	96.5	95.1	96.4	95.3	<b><u>96.4</u></b>	<b><u>95.2</u></b>	96.5	95.1	96.4	95.3
434.zeusmp	76.4	119	76.3	119	<b><u>76.3</u></b>	<b><u>119</u></b>	76.4	119	76.3	119	<b><u>76.3</u></b>	<b><u>119</u></b>
435.gromacs	132	54.2	131	54.3	<b><u>132</u></b>	<b><u>54.3</u></b>	132	54.2	131	54.3	<b><u>132</u></b>	<b><u>54.3</u></b>
436.cactusADM	80.1	149	<b><u>80.5</u></b>	<b><u>148</u></b>	80.6	148	80.1	149	<b><u>80.5</u></b>	<b><u>148</u></b>	80.6	148
437.leslie3d	109	86.6	108	86.9	<b><u>108</u></b>	<b><u>86.9</u></b>	109	86.6	108	86.9	<b><u>108</u></b>	<b><u>86.9</u></b>
444.namd	292	27.5	<b><u>292</u></b>	<b><u>27.5</u></b>	292	27.4	284	28.2	284	28.2	<b><u>284</u></b>	<b><u>28.2</u></b>
447.dealII	<b><u>159</u></b>	<b><u>71.8</u></b>	159	71.9	159	71.8	<b><u>159</u></b>	<b><u>71.8</u></b>	159	71.9	159	71.8
450.soplex	<b><u>180</u></b>	<b><u>46.2</u></b>	180	46.3	181	46.2	<b><u>180</u></b>	<b><u>46.2</u></b>	180	46.3	181	46.2
453.povray	85.1	62.6	85.5	62.2	<b><u>85.1</u></b>	<b><u>62.5</u></b>	78.4	67.9	<b><u>78.2</u></b>	<b><u>68.0</u></b>	78.1	68.1
454.calculix	151	54.7	<b><u>151</u></b>	<b><u>54.7</u></b>	151	54.6	151	54.7	<b><u>151</u></b>	<b><u>54.7</u></b>	151	54.6
459.GemsFDTD	147	72.2	148	71.8	<b><u>147</u></b>	<b><u>72.1</u></b>	147	72.2	148	71.8	<b><u>147</u></b>	<b><u>72.1</u></b>
465.tonto	<b><u>182</u></b>	<b><u>54.1</u></b>	182	54.1	182	54.1	182	54.2	181	54.4	<b><u>181</u></b>	<b><u>54.3</u></b>
470.lbm	66.7	206	66.9	205	<b><u>66.7</u></b>	<b><u>206</u></b>	66.7	206	66.9	205	<b><u>66.7</u></b>	<b><u>206</u></b>
481.wrf	113	98.8	<b><u>113</u></b>	<b><u>98.7</u></b>	113	98.5	113	98.8	<b><u>113</u></b>	<b><u>98.7</u></b>	113	98.5
482.sphinx3	291	67.1	<b><u>292</u></b>	<b><u>66.7</u></b>	294	66.2	291	67.1	<b><u>292</u></b>	<b><u>66.7</u></b>	294	66.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:  
 Power Management Policy: Custom  
 Energy Performance: Performance  
 Hyper-Threading: Disabled



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = 76.6

Express5800/T110i (Intel Pentium G4560)

SPECfp\_base2006 = 76.0

CPU2006 license: 9006

Test date: Apr-2017

Test sponsor: NEC Corporation

Hardware Availability: Apr-2017

Tested by: NEC Corporation

Software Availability: Jan-2017

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,1,0"

LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh10.2"

OMP\_NUM\_THREADS = "2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.2  
Transparent Huge Pages enabled by default.

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.deallI: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = 76.6

Express5800/T110i (Intel Pentium G4560)

SPECfp\_base2006 = 76.0

CPU2006 license: 9006

Test date: Apr-2017

Test sponsor: NEC Corporation

Hardware Availability: Apr-2017

Tested by: NEC Corporation

Software Availability: Jan-2017

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -fno-alias -auto-ilp32

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = 76.6

Express5800/T110i (Intel Pentium G4560)

SPECfp\_base2006 = 76.0

CPU2006 license: 9006

Test date: Apr-2017

Test sponsor: NEC Corporation

Hardware Availability: Apr-2017

Tested by: NEC Corporation

Software Availability: Jan-2017

## Peak Optimization Flags (Continued)

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -inline-calloc -qopt-malloc-options=3  
-auto -unroll4

### Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-110i-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-110i-RevA.xml>



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = 76.6

Express5800/T110i (Intel Pentium G4560)

SPECfp\_base2006 = 76.0

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Apr-2017

Hardware Availability: Apr-2017

Software Availability: Jan-2017

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue May 30 15:31:37 2017 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 30 May 2017.