



SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp®2006 = 87.4

Express5800/T110i-S (Intel Xeon E3-1240L v5)

SPECfp_base2006 = 85.6

CPU2006 license: 9006


Test date: Apr-2017

Test sponsor: NEC Corporation

Hardware Availability: Apr-2017

Tested by: NEC Corporation

Software Availability: Jan-2017

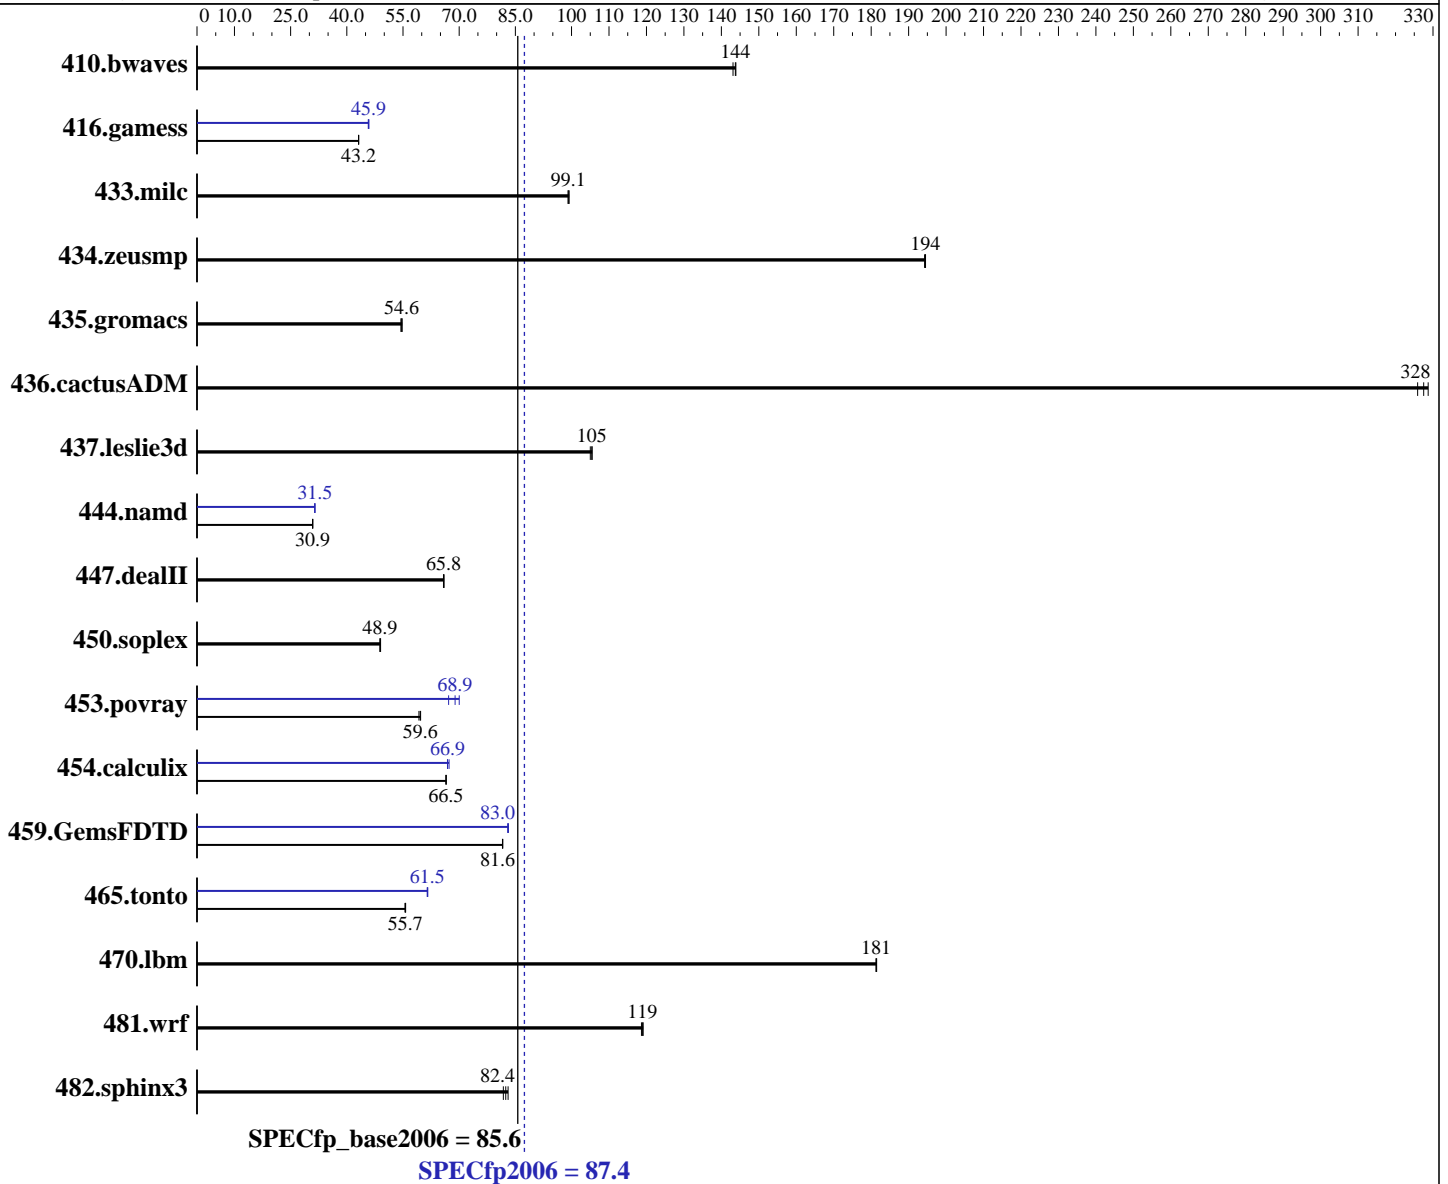

Hardware

CPU Name: Intel Xeon E3-1240L v5
 CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz
 CPU MHz: 2100
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 7.3 (Maipo)
 Kernel 3.10.0-514.6.1.el7.x86_64
 Compiler: C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux;
 Fortran: Version 17.0.0.098 of Intel Fortran Compiler for Linux
 Auto Parallel: Yes
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = **87.4**

Express5800/T110i-S (Intel Xeon E3-1240L v5)

SPECfp_base2006 = **85.6**

CPU2006 license: 9006

Test date: Apr-2017

Test sponsor: NEC Corporation

Hardware Availability: Apr-2017

Tested by: NEC Corporation

Software Availability: Jan-2017

L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 32 GB (2 x 16 GB 2Rx8 PC4-2400T-E, running at 2133 MHz)
 Disk Subsystem: 1 x 1 TB SATA, 7200 RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	95.0	143	94.5	144	94.5	144	95.0	143	94.5	144	94.5	144
416.gamess	454	43.1	454	43.2	454	43.2	427	45.9	427	45.9	428	45.7
433.milc	92.7	99.1	92.4	99.4	92.6	99.1	92.7	99.1	92.4	99.4	92.6	99.1
434.zeusmp	46.8	194	46.8	195	46.8	194	46.8	194	46.8	195	46.8	194
435.gromacs	130	54.8	131	54.6	131	54.4	130	54.8	131	54.6	131	54.4
436.cactusADM	36.5	328	36.7	326	36.4	329	36.5	328	36.7	326	36.4	329
437.leslie3d	89.1	106	89.2	105	89.5	105	89.1	106	89.2	105	89.5	105
444.namd	260	30.9	260	30.9	260	30.9	255	31.5	255	31.5	255	31.5
447.dealII	174	65.8	173	66.0	174	65.8	174	65.8	173	66.0	174	65.8
450.soplex	170	49.0	171	48.9	171	48.9	170	49.0	171	48.9	171	48.9
453.povray	89.1	59.7	89.3	59.6	89.8	59.3	76.0	70.0	77.2	68.9	79.2	67.2
454.calculix	124	66.5	124	66.5	124	66.5	123	66.9	123	67.3	123	66.9
459.GemsFDTD	130	81.6	130	81.6	130	81.6	128	83.0	128	83.0	128	83.1
465.tonto	177	55.7	177	55.5	177	55.7	160	61.5	160	61.6	160	61.5
470.lbm	75.8	181	75.8	181	75.7	181	75.8	181	75.8	181	75.7	181
481.wrf	93.9	119	93.8	119	94.1	119	93.9	119	93.8	119	94.1	119
482.sphinx3	235	83.1	238	81.8	236	82.4	235	83.1	238	81.8	236	82.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:
 Power Management Policy: Custom
 Energy Performance: Performance
 Hyper-Threading: Disabled



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = 87.4

Express5800/T110i-S (Intel Xeon E3-1240L v5)

SPECfp_base2006 = 85.6

CPU2006 license: 9006

Test date: Apr-2017

Test sponsor: NEC Corporation

Hardware Availability: Apr-2017

Tested by: NEC Corporation

Software Availability: Jan-2017

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,1,0"

LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh10.2"

OMP_NUM_THREADS = "4"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.2
Transparent Huge Pages enabled by default.

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = 87.4

Express5800/T110i-S (Intel Xeon E3-1240L v5)

SPECfp_base2006 = 85.6

CPU2006 license: 9006

Test date: Apr-2017

Test sponsor: NEC Corporation

Hardware Availability: Apr-2017

Tested by: NEC Corporation

Software Availability: Jan-2017

Base Optimization Flags

C benchmarks:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch`

C++ benchmarks:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch`

Fortran benchmarks:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch`

Benchmarks using both Fortran and C:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch`

Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: `basepeak = yes`

470.lbm: `basepeak = yes`

482.sphinx3: `basepeak = yes`

C++ benchmarks:

444.namd: `-prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -fno-alias -auto-ilp32`

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = 87.4

Express5800/T110i-S (Intel Xeon E3-1240L v5)

SPECfp_base2006 = 85.6

CPU2006 license: 9006

Test date: Apr-2017

Test sponsor: NEC Corporation

Hardware Availability: Apr-2017

Tested by: NEC Corporation

Software Availability: Jan-2017

Peak Optimization Flags (Continued)

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll2 -inline-level=0
-qopt-prefetch -parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -inline-calloc -qopt-malloc-options=3
-auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-110i-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-110i-RevA.xml>



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = 87.4

Express5800/T110i-S (Intel Xeon E3-1240L v5)

SPECfp_base2006 = 85.6

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Apr-2017

Hardware Availability: Apr-2017

Software Availability: Jan-2017

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue May 30 15:31:53 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 30 May 2017.