



SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Platinum 8180,
2.50GHz)

SPECfp®2006 = Not Run
SPECfp_base2006 = 150

CPU2006 license: 9019


Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Jun-2017

Hardware Availability: Aug-2017

Software Availability: Apr-2017

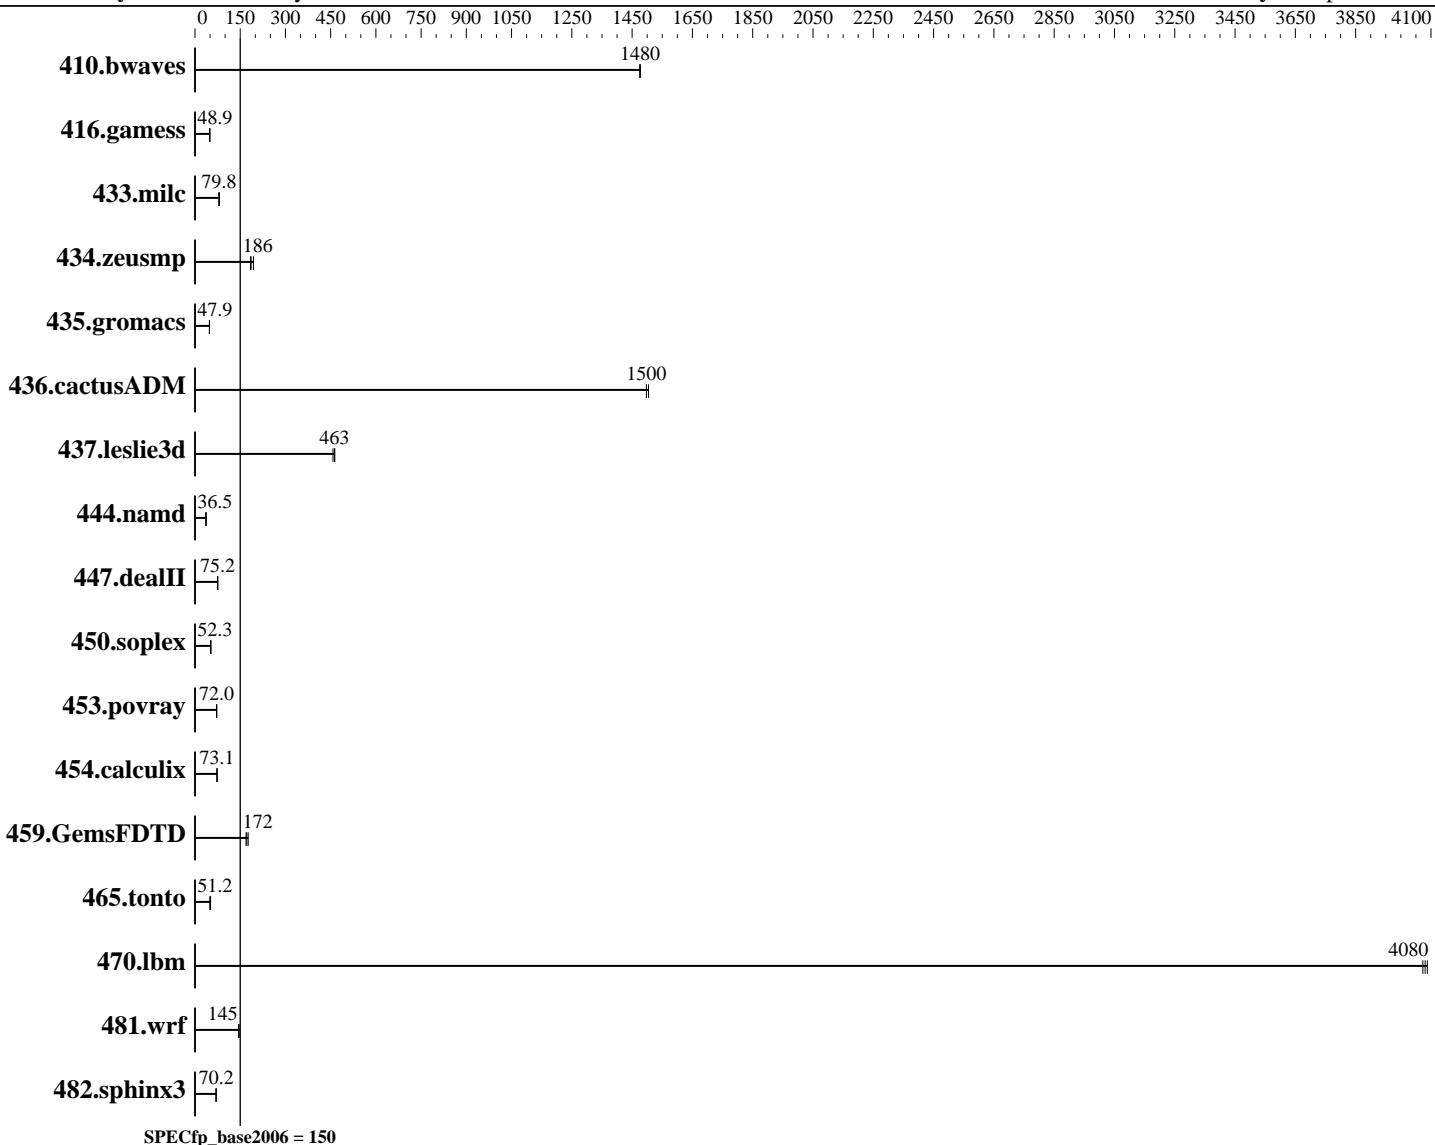

Hardware

CPU Name: Intel Xeon Platinum 8180
 CPU Characteristics: Intel Turbo Boost Technology up to 3.80 GHz
 CPU MHz: 2500
 FPU: Integrated
 CPU(s) enabled: 112 cores, 4 chips, 28 cores/chip
 CPU(s) orderable: 2,4 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 1 MB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 12 SP2 (x86_64)
 4.4.21-69-default
 Compiler: C/C++: Version 18.0.0.082 of Intel C/C++
 Beta Compiler for Linux;
 Fortran: Version 18.0.0.082 of Intel Fortran
 Beta Compiler for Linux
 Auto Parallel: Yes
 File System: xfs
 System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Platinum 8180,
2.50GHz)

SPECfp2006 = Not Run

SPECfp_base2006 = 150

CPU2006 license: 9019

Test date: Jun-2017

Test sponsor: Cisco Systems

Hardware Availability: Aug-2017

Tested by: Cisco Systems

Software Availability: Apr-2017

L3 Cache: 38.5 MB I+D on chip per chip
 Other Cache: None
 Memory: 768 GB (48 x 16 GB 2Rx4 PC4-2666V-R)
 Disk Subsystem: 1 x 800 GB SSD SAS
 Other Hardware: None

Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	9.20	1480	9.21	1480	9.20	1480						
416.gamess	400	48.9	399	49.0	400	48.9						
433.milc	115	79.6	114	80.5	115	79.8						
434.zeusmp	48.9	186	49.4	184	46.9	194						
435.gromacs	149	47.9	149	48.0	149	47.9						
436.cactusADM	7.98	1500	7.98	1500	7.94	1500						
437.leslie3d	20.3	464	20.3	463	20.5	458						
444.namd	220	36.5	221	36.4	220	36.5						
447.dealII	152	75.2	152	75.1	152	75.4						
450.soplex	160	52.2	160	52.3	159	52.4						
453.povray	73.9	72.0	73.9	72.0	74.5	71.4						
454.calculix	113	73.0	113	73.1	113	73.2						
459.GemsFDTD	62.7	169	60.1	176	61.8	172						
465.tonto	191	51.6	192	51.2	201	49.0						
470.lbm	3.37	4080	3.36	4090	3.37	4070						
481.wrf	76.9	145	76.9	145	76.8	145						
482.sphinx3	277	70.3	278	70.2	279	69.8						

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:

Intel HyperThreading Technology set to Disabled

CPU performance set to Enterprise

Power Performance Tuning set to OS

SNC set to Disabled

IMC Interleaving set to Auto

Patrol Scrub set to Disabled

Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6993

Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)

running on linux-nvug Mon Jun 26 08:08:50 2017

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Platinum 8180,
2.50GHz)

SPECfp2006 =

Not Run

SPECfp_base2006 =

150

CPU2006 license: 9019

Test date: Jun-2017

Test sponsor: Cisco Systems

Hardware Availability: Aug-2017

Tested by: Cisco Systems

Software Availability: Apr-2017

Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8180 CPU @ 2.50GHz
        4 "physical id"s (chips)
        112 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 28
    siblings : 28
    physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
    25 26 27 28 29 30
    physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
    25 26 27 28 29 30
    physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
    25 26 27 28 29 30
    physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
    25 26 27 28 29 30
cache size : 39424 KB
```

```
From /proc/meminfo
MemTotal:      791191572 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
    VERSION = 12
    PATCHLEVEL = 2
    # This file is deprecated and will be removed in a future service pack or
    release.
    # Please check /etc/os-release for details about this release.
os-release:
    NAME="SLES"
    VERSION="12-SP2"
    VERSION_ID="12.2"
    PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
    ID="sles"
    ANSI_COLOR="0;32"
    CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

```
uname -a:
Linux linux-nvug 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
(9464f67) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jun 25 22:33
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Platinum 8180,
2.50GHz)

SPECfp2006 =

Not Run

SPECfp_base2006 =

150

CPU2006 license: 9019

Test date: Jun-2017

Test sponsor: Cisco Systems

Hardware Availability: Aug-2017

Tested by: Cisco Systems

Software Availability: Apr-2017

Platform Notes (Continued)

SPEC is set to: /opt/cpu2006-1.2

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	xfs	644G	60G	584G	10%	/

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Cisco Systems, Inc. C480M5.3.1.0.245.0514171056 05/14/2017

Memory:

48x 0xCE00 M393A2G40EB2-CTD 16 GB 2 rank 2666 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH = "/opt/cpu2006-1.2/lib/ia32:/opt/cpu2006-1.2/lib/intel64:/opt/cpu2006-1.2/sh10.2"

OMP_NUM_THREADS = "112"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.2
Transparent Huge Pages enabled by default.

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Platinum 8180,
2.50GHz)

SPECfp2006 =

Not Run

SPECfp_base2006 =

150

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date:

Jun-2017

Hardware Availability: Aug-2017

Software Availability: Apr-2017

Base Portability Flags (Continued)

```
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>
<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>
<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revG.xml>



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Platinum 8180,
2.50GHz)

SPECfp2006 = Not Run

SPECfp_base2006 = 150

CPU2006 license: 9019

Test date: Jun-2017

Test sponsor: Cisco Systems

Hardware Availability: Aug-2017

Tested by: Cisco Systems

Software Availability: Apr-2017

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 13 12:50:56 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 13 July 2017.