



SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant BL460c Gen10

(2.00 GHz, Intel Xeon Platinum 8164)

SPECfp®2006 =

145

SPECfp_base2006 =

138

CPU2006 license: 3

Test sponsor: HPE


Tested by: HPE

Test date:

Jun-2017

Hardware Availability: Sep-2017

Software Availability: Apr-2017

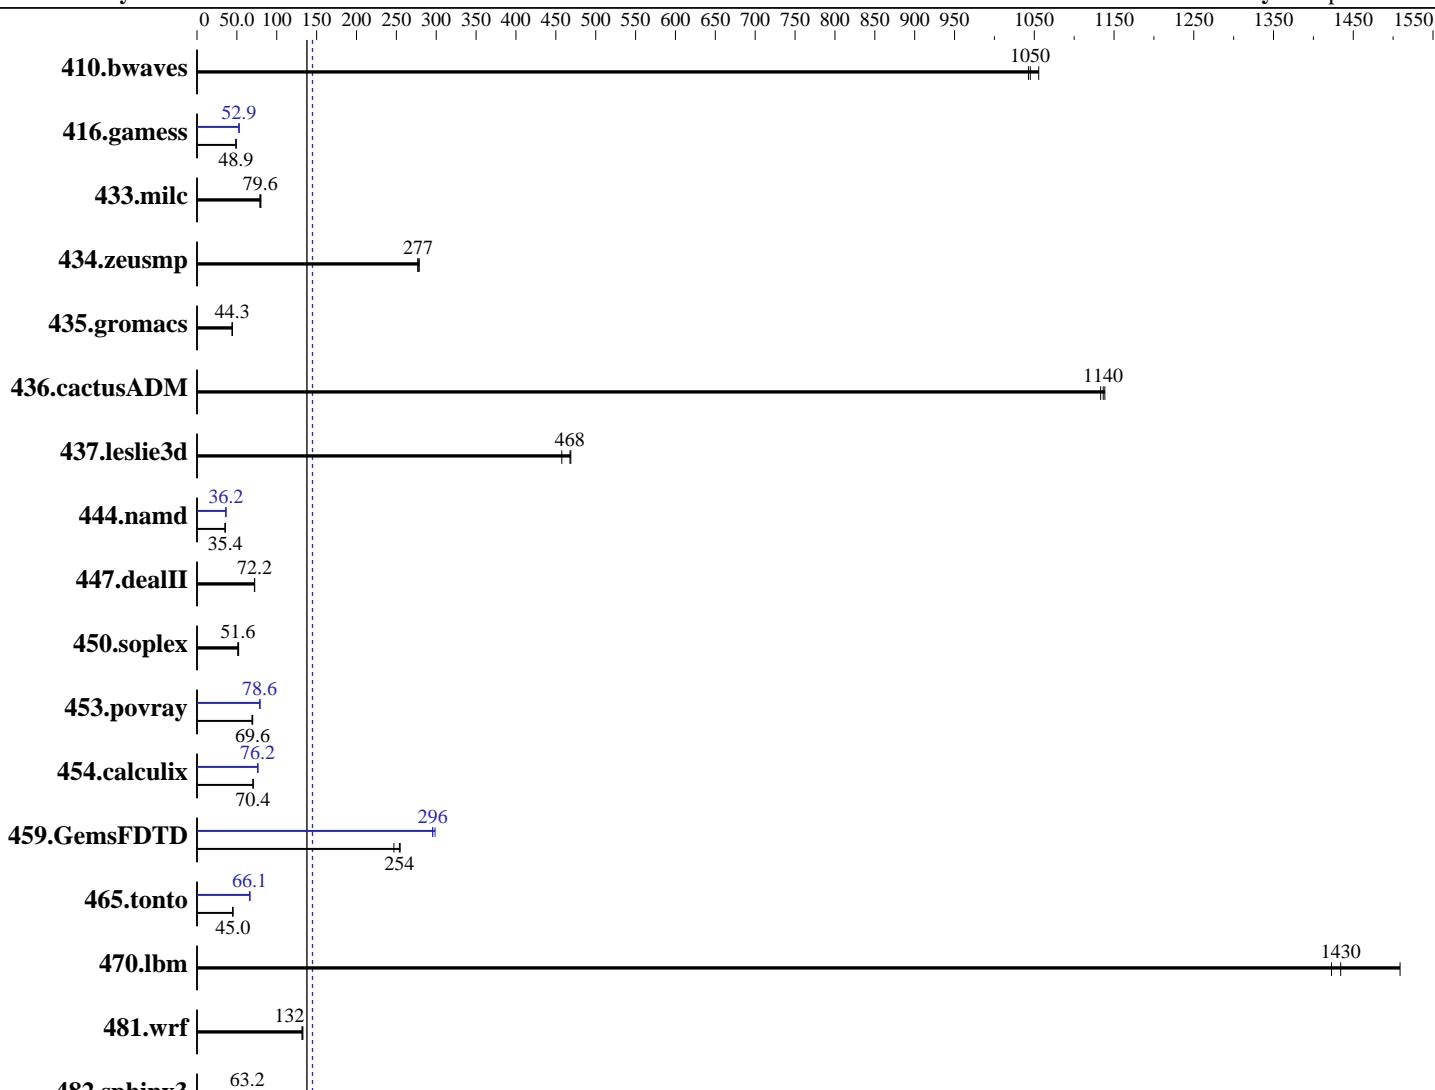

SPECfp_base2006 = 138

SPECfp2006 = 145

Hardware

CPU Name: Intel Xeon Platinum 8164
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz
 CPU MHz: 2000
 FPU: Integrated
 CPU(s) enabled: 52 cores, 2 chips, 26 cores/chip
 CPU(s) orderable: 1,2 chip(s)
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 1 MB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 12 (x86_64) SP2
 Compiler: Kernel 4.4.21-69-default
 C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux;
 Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux
 Auto Parallel: Yes
 File System: xfs
 System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant BL460c Gen10

(2.00 GHz, Intel Xeon Platinum 8164)

SPECfp2006 =

145

SPECfp_base2006 =

138

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date:

Jun-2017

Hardware Availability: Sep-2017

Software Availability: Apr-2017

L3 Cache: 35.75 MB I+D on chip per chip
 Other Cache: None
 Memory: 192 GB (12 x 16 GB 2Rx8 PC4-2666V-R)
 Disk Subsystem: 1 x 450 GB SATA SSD, RAID 0
 Other Hardware: None

Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

| Benchmark | Base | | | | | | Peak | | | | | |
|---------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| | Seconds | Ratio |
| 410.bwaves | 13.0 | 1040 | 12.9 | 1060 | 13.0 | 1050 | 13.0 | 1040 | 12.9 | 1060 | 13.0 | 1050 |
| 416.gamess | 400 | 48.9 | 400 | 48.9 | 400 | 48.9 | 370 | 52.9 | 370 | 52.9 | 373 | 52.5 |
| 433.milc | 116 | 78.9 | 114 | 80.2 | 115 | 79.6 | 116 | 78.9 | 114 | 80.2 | 115 | 79.6 |
| 434.zeusmp | 32.6 | 279 | 32.9 | 277 | 32.8 | 277 | 32.6 | 279 | 32.9 | 277 | 32.8 | 277 |
| 435.gromacs | 161 | 44.3 | 162 | 44.1 | 161 | 44.3 | 161 | 44.3 | 162 | 44.1 | 161 | 44.3 |
| 436.cactusADM | 10.5 | 1140 | 10.5 | 1130 | 10.5 | 1140 | 10.5 | 1140 | 10.5 | 1130 | 10.5 | 1140 |
| 437.leslie3d | 20.5 | 457 | 20.1 | 468 | 20.1 | 469 | 20.5 | 457 | 20.1 | 468 | 20.1 | 469 |
| 444.namd | 227 | 35.4 | 227 | 35.4 | 227 | 35.3 | 222 | 36.2 | 221 | 36.2 | 221 | 36.2 |
| 447.dealII | 159 | 72.2 | 159 | 72.0 | 158 | 72.3 | 159 | 72.2 | 159 | 72.0 | 158 | 72.3 |
| 450.soplex | 162 | 51.6 | 163 | 51.2 | 160 | 52.2 | 162 | 51.6 | 163 | 51.2 | 160 | 52.2 |
| 453.povray | 76.2 | 69.8 | 77.2 | 68.9 | 76.4 | 69.6 | 67.7 | 78.6 | 67.7 | 78.6 | 67.2 | 79.2 |
| 454.calculix | 117 | 70.4 | 117 | 70.4 | 117 | 70.3 | 108 | 76.4 | 108 | 76.2 | 108 | 76.2 |
| 459.GemsFDTD | 43.0 | 247 | 41.6 | 255 | 41.8 | 254 | 35.9 | 296 | 35.9 | 295 | 35.5 | 299 |
| 465.tonto | 218 | 45.1 | 219 | 45.0 | 221 | 44.6 | 149 | 66.1 | 148 | 66.4 | 149 | 66.1 |
| 470.lbm | 9.66 | 1420 | 9.11 | 1510 | 9.58 | 1430 | 9.66 | 1420 | 9.11 | 1510 | 9.58 | 1430 |
| 481.wrf | 84.7 | 132 | 84.1 | 133 | 84.7 | 132 | 84.7 | 132 | 84.1 | 133 | 84.7 | 132 |
| 482.sphinx3 | 308 | 63.2 | 312 | 62.4 | 308 | 63.2 | 308 | 63.2 | 312 | 62.4 | 308 | 63.2 |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled by default.

Filesystem page cache cleared with:

shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run

Platform Notes

BIOS Configuration:

Hyper Threading set to Disabled

Thermal Configuration set to Maximum Cooling

LLC Prefetch set to Enabled

XPT Prefetch set to Disabled

LLC Dead Line Allocation set to Disabled

Workload Profile set to General Peak Frequency Compute

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant BL460c Gen10

(2.00 GHz, Intel Xeon Platinum 8164)

SPECfp2006 =

145

SPECfp_base2006 =

138

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date:

Jun-2017

Hardware Availability: Sep-2017

Software Availability: Apr-2017

Platform Notes (Continued)

Workload Profile set to Custom

Minimum Processor Idle Power Package C-state set to No Package State

Sysinfo program /home/cpu2006/config/sysinfo.rev6993

Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)

running on linux-kzzr Fri Jun 23 12:47:27 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Platinum 8164 CPU @ 2.00GHz
        2 "physical id"s (chips)
        52 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
        cpu cores : 26
        siblings : 26
        physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25
        26 27 28 29
        physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25
        26 27 28 29
cache size : 36608 KB
```

From /proc/meminfo

```
MemTotal:      197744608 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

/usr/bin/lsb_release -d

```
SUSE Linux Enterprise Server 12 SP2
```

From /etc/*release* /etc/*version*

```
SuSE-release:
        SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
        NAME="SLES"
        VERSION="12-SP2"
        VERSION_ID="12.2"
        PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
        ID="sles"
        ANSI_COLOR="0;32"
        CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

uname -a:

```
Linux linux-kzzr 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
Continued on next page
```



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant BL460c Gen10

(2.00 GHz, Intel Xeon Platinum 8164)

SPECfp2006 =

145

SPECfp_base2006 =

138

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date:

Jun-2017

Hardware Availability: Sep-2017

Software Availability: Apr-2017

Platform Notes (Continued)

(9464f67) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Jun 23 08:20

SPEC is set to: /home/cpu2006

| Filesystem | Type | Size | Used | Avail | Use% | Mounted on |
|------------|------|------|------|-------|------|------------|
| /dev/sda4 | xfs | 331G | 9.7G | 321G | 3% | /home |

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE I41 06/08/2017

Memory:

4x UNKNOWN NOT AVAILABLE

12x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2666 MHz

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of

memory is 192 GB and the dmidecode description should have one line reading as:

12x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2666 MHz

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH = "/home/cpu2006/lib/ia32:/home/cpu2006/lib/intel64:/home/cpu2006/sh10.2"

OMP_NUM_THREADS = "52"

Binaries compiled on a system with 1x Intel Core i7-4790K CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.2

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant BL460c Gen10

(2.00 GHz, Intel Xeon Platinum 8164)

SPECfp2006 =

145

SPECfp_base2006 =

138

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date:

Jun-2017

Hardware Availability: Sep-2017

Software Availability: Apr-2017

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant BL460c Gen10

(2.00 GHz, Intel Xeon Platinum 8164)

SPECfp2006 =

145

SPECfp_base2006 =

138

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date:

Jun-2017

Hardware Availability: Sep-2017

Software Availability: Apr-2017

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll2 -inline-level=0
-qopt-prefetch -parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -inline-calloc -qopt-malloc-options=3
-auto -unroll4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant BL460c Gen10

(2.00 GHz, Intel Xeon Platinum 8164)

SPECfp2006 =

145

SPECfp_base2006 =

138

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date:

Jun-2017

Hardware Availability: Sep-2017

Software Availability: Apr-2017

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revB.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.

For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Fri Aug 11 13:23:30 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 10 August 2017.