



# SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Huawei

SPECfp®2006 = 147

### Huawei 1288H V5 (Intel Xeon Gold 6152)

SPECfp\_base2006 = 140

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Jun-2017

Hardware Availability: Aug-2017

Software Availability: Nov-2016

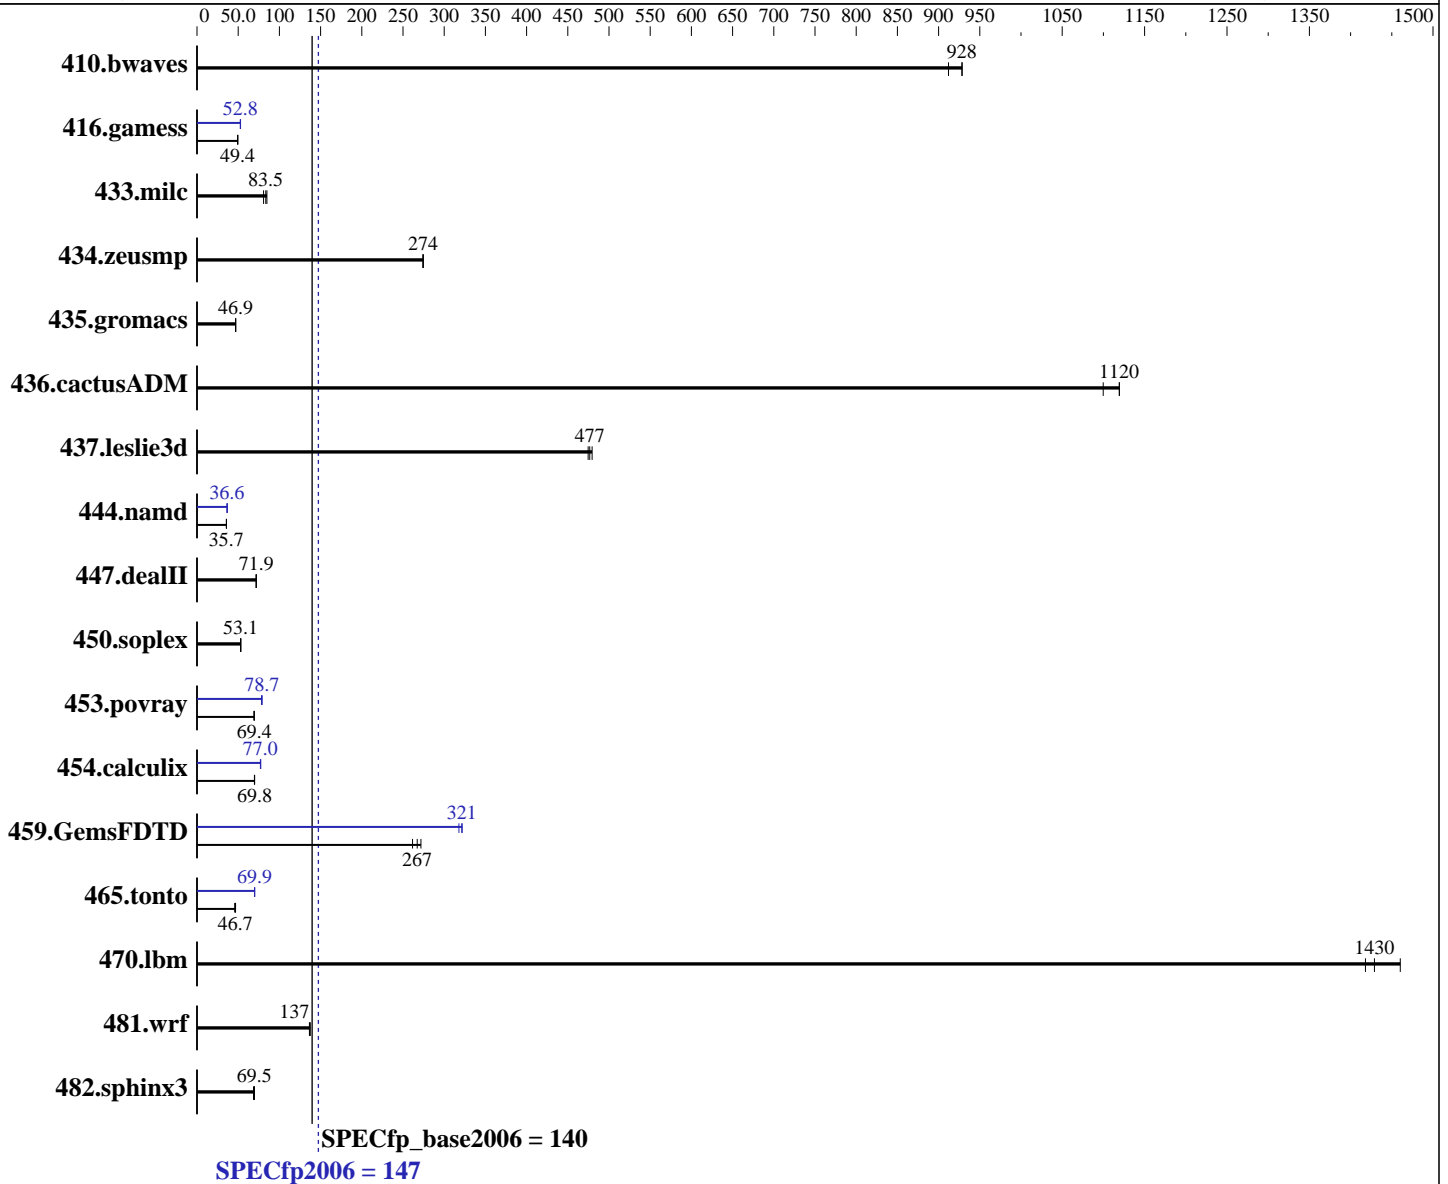

#### Hardware

CPU Name: Intel Xeon Gold 6152  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz  
 CPU MHz: 2100  
 FPU: Integrated  
 CPU(s) enabled: 44 cores, 2 chips, 22 cores/chip  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 1 MB I+D on chip per core

Continued on next page

#### Software

Operating System: Red Hat Enterprise Linux Server release 7.3 (Maipo)  
 3.10.0-514.el7.x86\_64  
 Compiler: C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 17.0.0.098 of Intel Fortran Compiler for Linux  
 Auto Parallel: Yes  
 File System: xfs

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Huawei

SPECfp2006 = 147

## Huawei 1288H V5 (Intel Xeon Gold 6152)

SPECfp\_base2006 = 140

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jun-2017

Hardware Availability: Aug-2017

Software Availability: Nov-2016

L3 Cache: 30.25 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2666V-R)  
 Disk Subsystem: 1 x 1200 GB SAS, 10000 RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	14.9	912	<b><u>14.6</u></b>	<b><u>928</u></b>	14.6	929	14.9	912	<b><u>14.6</u></b>	<b><u>928</u></b>	14.6	929
416.gamess	395	49.5	<b><u>396</u></b>	<b><u>49.4</u></b>	398	49.3	373	52.5	371	52.8	<b><u>371</u></b>	<b><u>52.8</u></b>
433.milc	114	80.8	108	84.8	<b><u>110</u></b>	<b><u>83.5</u></b>	114	80.8	108	84.8	<b><u>110</u></b>	<b><u>83.5</u></b>
434.zeusmp	<b><u>33.2</u></b>	<b><u>274</u></b>	33.2	274	33.1	275	<b><u>33.2</u></b>	<b><u>274</u></b>	33.2	274	33.1	275
435.gromacs	<b><u>152</u></b>	<b><u>46.9</u></b>	152	47.0	152	46.8	<b><u>152</u></b>	<b><u>46.9</u></b>	152	47.0	152	46.8
436.cactusADM	10.7	1120	10.9	1100	<b><u>10.7</u></b>	<b><u>1120</u></b>	10.7	1120	10.9	1100	<b><u>10.7</u></b>	<b><u>1120</u></b>
437.leslie3d	19.8	475	<b><u>19.7</u></b>	<b><u>477</u></b>	19.6	480	19.8	475	<b><u>19.7</u></b>	<b><u>477</u></b>	19.6	480
444.namd	<b><u>225</u></b>	<b><u>35.7</u></b>	225	35.7	225	35.7	219	36.6	<b><u>219</u></b>	<b><u>36.6</u></b>	219	36.6
447.dealII	159	71.8	159	72.0	<b><u>159</u></b>	<b><u>71.9</u></b>	159	71.8	159	72.0	<b><u>159</u></b>	<b><u>71.9</u></b>
450.soplex	157	53.1	<b><u>157</u></b>	<b><u>53.1</u></b>	158	52.9	157	53.1	<b><u>157</u></b>	<b><u>53.1</u></b>	158	52.9
453.povray	76.8	69.3	76.6	69.5	<b><u>76.7</u></b>	<b><u>69.4</u></b>	68.0	78.3	<b><u>67.6</u></b>	<b><u>78.7</u></b>	67.3	79.0
454.calculix	118	69.9	<b><u>118</u></b>	<b><u>69.8</u></b>	118	69.7	107	77.4	<b><u>107</u></b>	<b><u>77.0</u></b>	107	77.0
459.GemsFDTD	39.0	272	<b><u>39.7</u></b>	<b><u>267</u></b>	40.6	262	33.4	318	<b><u>33.0</u></b>	<b><u>321</u></b>	33.0	322
465.tonto	215	45.7	210	46.8	<b><u>211</u></b>	<b><u>46.7</u></b>	141	70.0	141	69.9	<b><u>141</u></b>	<b><u>69.9</u></b>
470.lbm	<b><u>9.62</u></b>	<b><u>1430</u></b>	9.69	1420	9.41	1460	<b><u>9.62</u></b>	<b><u>1430</u></b>	9.69	1420	9.41	1460
481.wrf	<b><u>81.6</u></b>	<b><u>137</u></b>	81.3	137	81.9	136	<b><u>81.6</u></b>	<b><u>137</u></b>	81.3	137	81.9	136
482.sphinx3	284	68.6	279	69.7	<b><u>281</u></b>	<b><u>69.5</u></b>	284	68.6	279	69.7	<b><u>281</u></b>	<b><u>69.5</u></b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:  
 Set Power Efficiency Mode to Custom  
 Set Hyper-Threading to Disable  
 Sysinfo program /spec17/config/sysinfo.rev6993  
 Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)  
 running on localhost.localdomain Mon Jun 5 23:41:46 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 147

Huawei 1288H V5 (Intel Xeon Gold 6152)

SPECfp\_base2006 = 140

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jun-2017

Hardware Availability: Aug-2017

Software Availability: Nov-2016

## Platform Notes (Continued)

```

From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 6152 CPU @ 2.10GHz
 2 "physical id"s (chips)
44 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 22
  siblings  : 22
  physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
28
  physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
28
cache size : 30976 KB

```

```

From /proc/meminfo
MemTotal:      790482140 kB
HugePages_Total:    0
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.3 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.3"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.3 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.3:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.3:ga:server

```

```

uname -a:
Linux localhost.localdomain 3.10.0-514.el7.x86_64 #1 SMP Wed Oct 19 11:24:13
EDT 2016 x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Jun 5 10:38

```

SPEC is set to: /spec17
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       xfs   898G  14G  885G   2% /

```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS INSYDE Corp. 0.13 04/11/2017

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 147

Huawei 1288H V5 (Intel Xeon Gold 6152)

SPECfp\_base2006 = 140

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jun-2017

Hardware Availability: Aug-2017

Software Availability: Nov-2016

## Platform Notes (Continued)

Memory:

24x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"

LD\_LIBRARY\_PATH = "/spec17/libs/32:/spec17/libs/64:/spec17/sh10.2"

OMP\_NUM\_THREADS = "44"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main

436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main

437.leslie3d: -DSPEC\_CPU\_LP64

444.namd: -DSPEC\_CPU\_LP64

447.dealII: -DSPEC\_CPU\_LP64

450.soplex: -DSPEC\_CPU\_LP64

453.povray: -DSPEC\_CPU\_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 147

Huawei 1288H V5 (Intel Xeon Gold 6152)

SPECfp\_base2006 = 140

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jun-2017

Hardware Availability: Aug-2017

Software Availability: Nov-2016

## Base Portability Flags (Continued)

454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
 -xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

C++ benchmarks:  
 -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

Fortran benchmarks:  
 -xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

Benchmarks using both Fortran and C:  
 -xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

## Peak Compiler Invocation

C benchmarks:  
 icc -m64

C++ benchmarks:  
 icpc -m64

Fortran benchmarks:  
 ifort -m64

Benchmarks using both Fortran and C:  
 icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 147

Huawei 1288H V5 (Intel Xeon Gold 6152)

SPECfp\_base2006 = 140

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jun-2017

Hardware Availability: Aug-2017

Software Availability: Nov-2016

## Peak Optimization Flags

### C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

### C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll2 -inline-level=0  
-qopt-prefetch -parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -inline-calloc -qopt-malloc-options=3  
-auto -unroll4

### Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 147

Huawei 1288H V5 (Intel Xeon Gold 6152)

SPECfp\_base2006 = 140

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jun-2017

Hardware Availability: Aug-2017

Software Availability: Nov-2016

## Peak Optimization Flags (Continued)

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-SKL-V1.6.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-SKL-V1.6.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Jul 25 15:51:35 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 25 July 2017.