



# SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Huawei

SPECfp®2006 = 152

### Huawei 1288H V5 (Intel Xeon Gold 6148)

SPECfp\_base2006 = 145

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Jun-2017

Hardware Availability: Aug-2017

Software Availability: Nov-2016

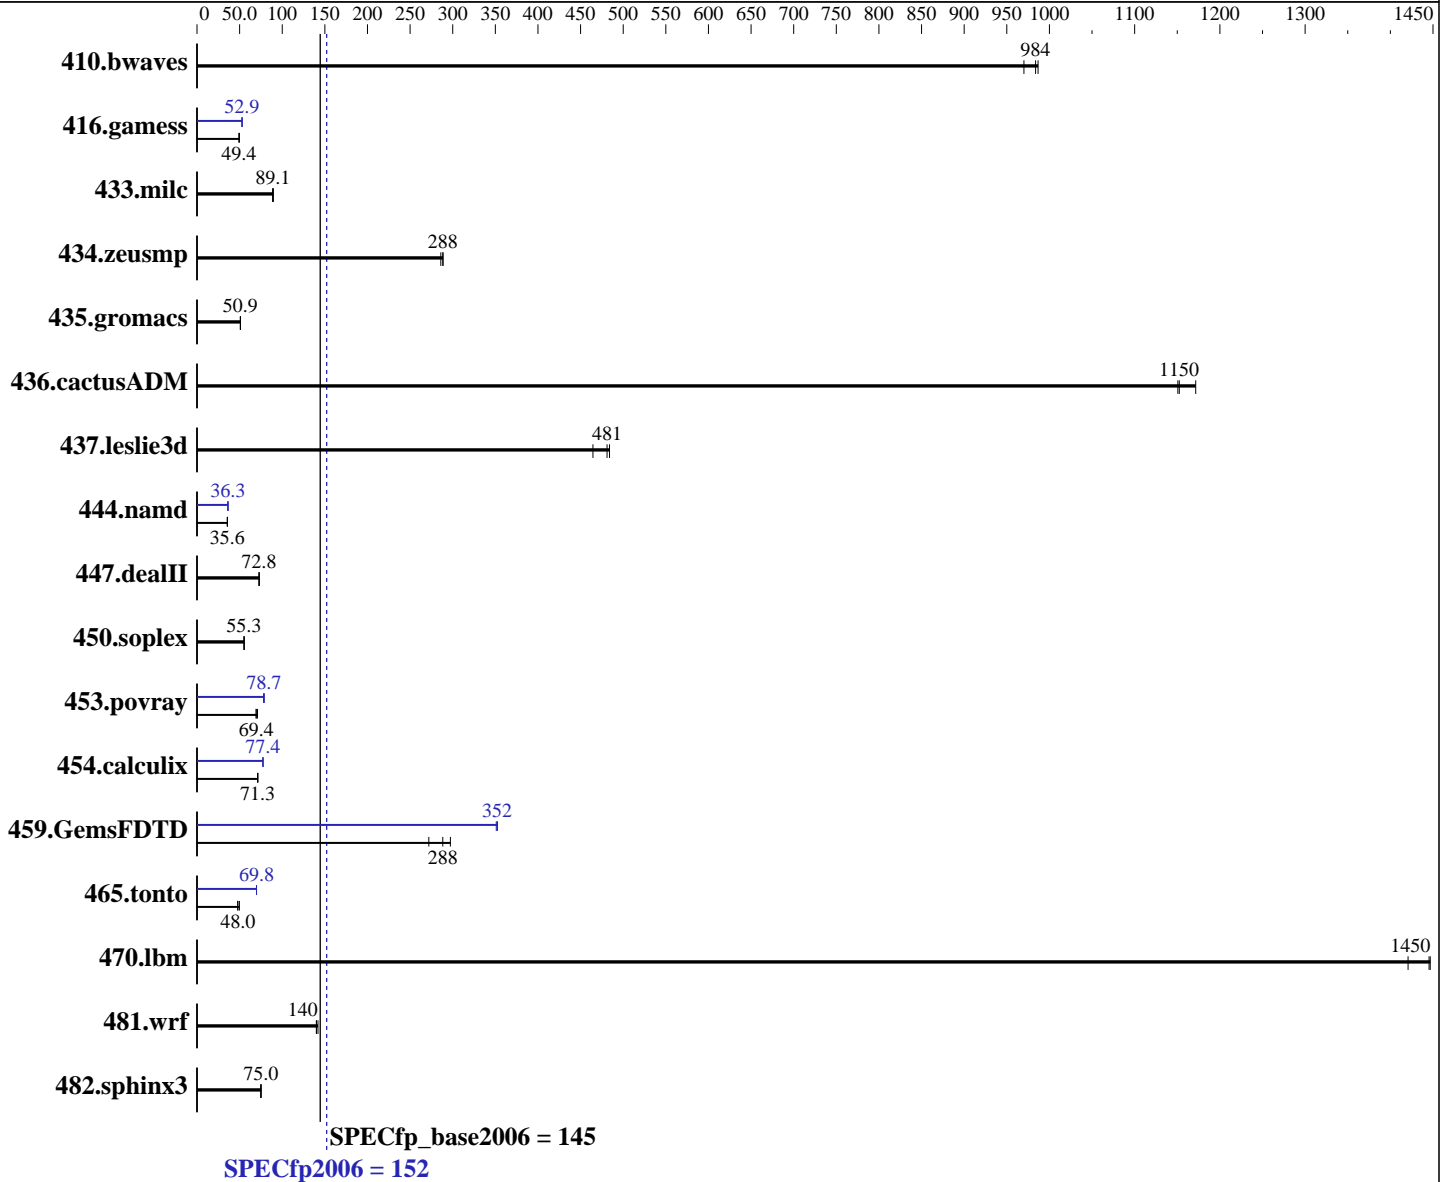

#### Hardware

CPU Name: Intel Xeon Gold 6148  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 40 cores, 2 chips, 20 cores/chip  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 1 MB I+D on chip per core

Continued on next page

#### Software

Operating System: Red Hat Enterprise Linux Server release 7.3 (Maipo)  
 3.10.0-514.el7.x86\_64  
 Compiler: C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 17.0.0.098 of Intel Fortran Compiler for Linux  
 Auto Parallel: Yes  
 File System: xfs

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Huawei

SPECfp2006 = **152**

## Huawei 1288H V5 (Intel Xeon Gold 6148)

SPECfp\_base2006 = **145**

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jun-2017

Hardware Availability: Aug-2017

Software Availability: Nov-2016

L3 Cache: 27.5 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2666V-R)  
 Disk Subsystem: 1 x 1200 GB SAS, 10000 RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	<b><u>13.8</u></b>	<b><u>984</u></b>	14.0	970	13.8	987	<b><u>13.8</u></b>	<b><u>984</u></b>	14.0	970	13.8	987
416.gamess	396	49.4	<b><u>396</u></b>	<b><u>49.4</u></b>	396	49.5	370	52.9	371	52.8	<b><u>370</u></b>	<b><u>52.9</u></b>
433.milc	103	88.7	103	89.5	<b><u>103</u></b>	<b><u>89.1</u></b>	103	88.7	103	89.5	<b><u>103</u></b>	<b><u>89.1</u></b>
434.zeusmp	<b><u>31.6</u></b>	<b><u>288</u></b>	31.5	289	31.8	286	<b><u>31.6</u></b>	<b><u>288</u></b>	31.5	289	31.8	286
435.gromacs	140	50.9	<b><u>140</u></b>	<b><u>50.9</u></b>	140	51.0	140	50.9	<b><u>140</u></b>	<b><u>50.9</u></b>	140	51.0
436.cactusADM	<b><u>10.4</u></b>	<b><u>1150</u></b>	10.2	1170	10.4	1150	<b><u>10.4</u></b>	<b><u>1150</u></b>	10.2	1170	10.4	1150
437.leslie3d	20.2	464	<b><u>19.5</u></b>	<b><u>481</u></b>	19.4	484	20.2	464	<b><u>19.5</u></b>	<b><u>481</u></b>	19.4	484
444.namd	225	35.6	225	35.7	<b><u>225</u></b>	<b><u>35.6</u></b>	221	36.3	221	36.3	<b><u>221</u></b>	<b><u>36.3</u></b>
447.dealII	157	72.8	157	73.1	<b><u>157</u></b>	<b><u>72.8</u></b>	157	72.8	157	73.1	<b><u>157</u></b>	<b><u>72.8</u></b>
450.soplex	<b><u>151</u></b>	<b><u>55.3</u></b>	151	55.4	151	55.2	<b><u>151</u></b>	<b><u>55.3</u></b>	151	55.4	151	55.2
453.povray	76.6	69.4	75.0	71.0	<b><u>76.6</u></b>	<b><u>69.4</u></b>	67.5	78.8	<b><u>67.6</u></b>	<b><u>78.7</u></b>	68.2	78.1
454.calculix	116	71.2	116	71.3	<b><u>116</u></b>	<b><u>71.3</u></b>	107	77.4	107	77.4	<b><u>107</u></b>	<b><u>77.4</u></b>
459.GemsFDTD	35.7	297	<b><u>36.8</u></b>	<b><u>288</u></b>	39.0	272	<b><u>30.1</u></b>	<b><u>352</u></b>	30.1	353	30.2	351
465.tonto	198	49.8	<b><u>205</u></b>	<b><u>48.0</u></b>	206	47.7	141	69.8	<b><u>141</u></b>	<b><u>69.8</u></b>	141	69.9
470.lbm	9.50	1450	<b><u>9.51</u></b>	<b><u>1450</u></b>	9.67	1420	9.50	1450	<b><u>9.51</u></b>	<b><u>1450</u></b>	9.67	1420
481.wrf	78.7	142	79.8	140	<b><u>79.7</u></b>	<b><u>140</u></b>	78.7	142	79.8	140	<b><u>79.7</u></b>	<b><u>140</u></b>
482.sphinx3	259	75.3	<b><u>260</u></b>	<b><u>75.0</u></b>	260	74.8	259	75.3	<b><u>260</u></b>	<b><u>75.0</u></b>	260	74.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:  
 Set Power Efficiency Mode to Custom  
 Set Hyper-Threading to Disable  
 Sysinfo program /spec17/config/sysinfo.rev6993  
 Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)  
 running on localhost.localdomain Tue May 23 08:34:13 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 152

Huawei 1288H V5 (Intel Xeon Gold 6148)

SPECfp\_base2006 = 145

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jun-2017

Hardware Availability: Aug-2017

Software Availability: Nov-2016

## Platform Notes (Continued)

```

From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 6148 CPU @ 2.40GHz
 2 "physical id"s (chips)
40 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 20
  siblings  : 20
  physical 0: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
  physical 1: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
cache size : 28160 KB

```

```

From /proc/meminfo
MemTotal:      394145204 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.3 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.3"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.3 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.3:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.3:ga:server

```

```

uname -a:
Linux localhost.localdomain 3.10.0-514.el7.x86_64 #1 SMP Wed Oct 19 11:24:13
EDT 2016 x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 May 22 11:58

```

SPEC is set to: /spec17
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        xfs   262G  87G  175G  34% /

```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS INSYDE Corp. 0.10 02/14/2017

Memory:

24x Samsung M393A2K43BB1-CTD 16 GB 2 rank 2666 MHz  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 152

Huawei 1288H V5 (Intel Xeon Gold 6148)

SPECfp\_base2006 = 145

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jun-2017

Hardware Availability: Aug-2017

Software Availability: Nov-2016

## Platform Notes (Continued)

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"

LD\_LIBRARY\_PATH = "/spec17/libs/32:/spec17/libs/64:/spec17/sh10.2"

OMP\_NUM\_THREADS = "40"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 152

Huawei 1288H V5 (Intel Xeon Gold 6148)

SPECfp\_base2006 = 145

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jun-2017

Hardware Availability: Aug-2017

Software Availability: Nov-2016

## Base Portability Flags (Continued)

465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 5



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 152

Huawei 1288H V5 (Intel Xeon Gold 6148)

SPECfp\_base2006 = 145

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jun-2017

Hardware Availability: Aug-2017

Software Availability: Nov-2016

## Peak Optimization Flags (Continued)

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

### C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -fno-alias -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll2 -inline-level=0  
-qopt-prefetch -parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -inline-calloc -qopt-malloc-options=3  
-auto -unroll4

### Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 152

Huawei 1288H V5 (Intel Xeon Gold 6148)

SPECfp\_base2006 = 145

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jun-2017

Hardware Availability: Aug-2017

Software Availability: Nov-2016

## Peak Optimization Flags (Continued)

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-SKL-V1.6.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-SKL-V1.6.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Jul 25 15:51:54 2017 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 25 July 2017.